DIANOCHE

Flexible track

S15 system

Catalogue 2026

DIANOCHE


Minimum bending radius 500 mm

DIANOCHE



S15 series

TRACK

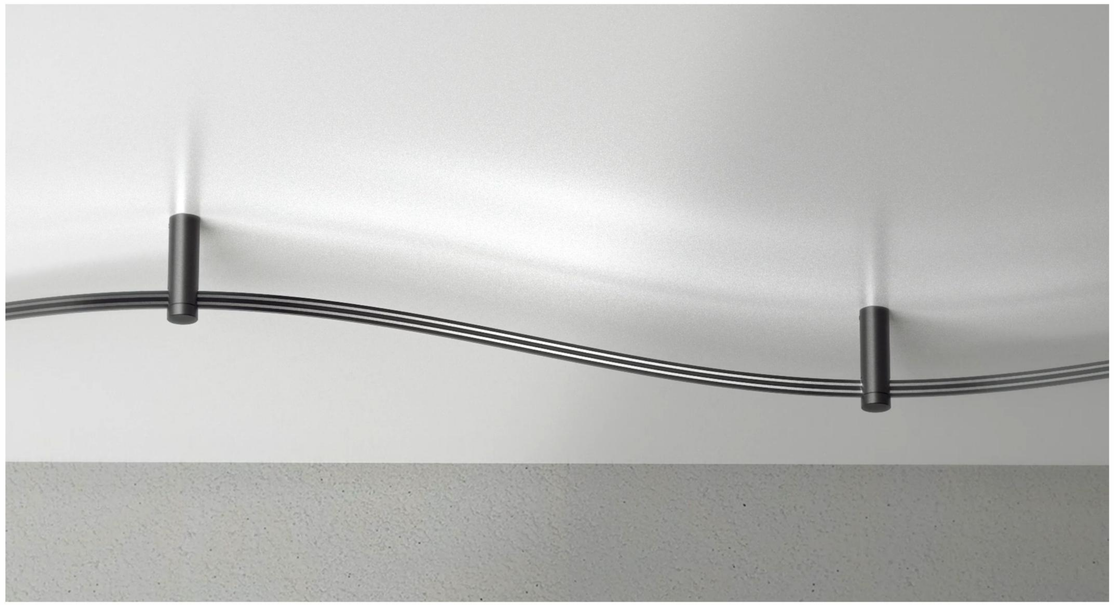

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-5M	DC 48V	PC + Copper + Stainless Steel	L5000xW15xH3.5mm	Soft track 5M


COLORS

BK



TRACK PARTS






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-E00	48V	PC	42x21x13 mm	Track Input Conductive Module






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-E01	48V	PC	(42x21x13) x2 mm	Track Connecting String Conductive Modules (Wire length 0.1m)






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-E02	48V	PC	42x21x13 mm	Track Connecting String Conductive Modules






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-END	/	PC	18x15x6.5 mm	Orbital Tail Plugs

TRACK PARTS






COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-W01	48V	Aluminium	∅26x65 mm	Rail Ceiling Assembly





COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-W02	48V	Aluminium	∅60x60 mm	Rail Ceiling Assembly (Can be connected to electricity at the bottom)




COLORS

BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-P300	48V	Aluminium	∅26x350 mm	Rail Boom Line Assemblies
DN-S15T-P700	48V	Aluminium	∅26x740 mm	






COLORS


BK

MODEL NO.	Input	Material	Size(mm)	Description
DN-S15T-B01	220-240V	Cutter	275x58x50 mm	Rail Ceiling Input Power Box (Without driver)


Minimum curvature radius

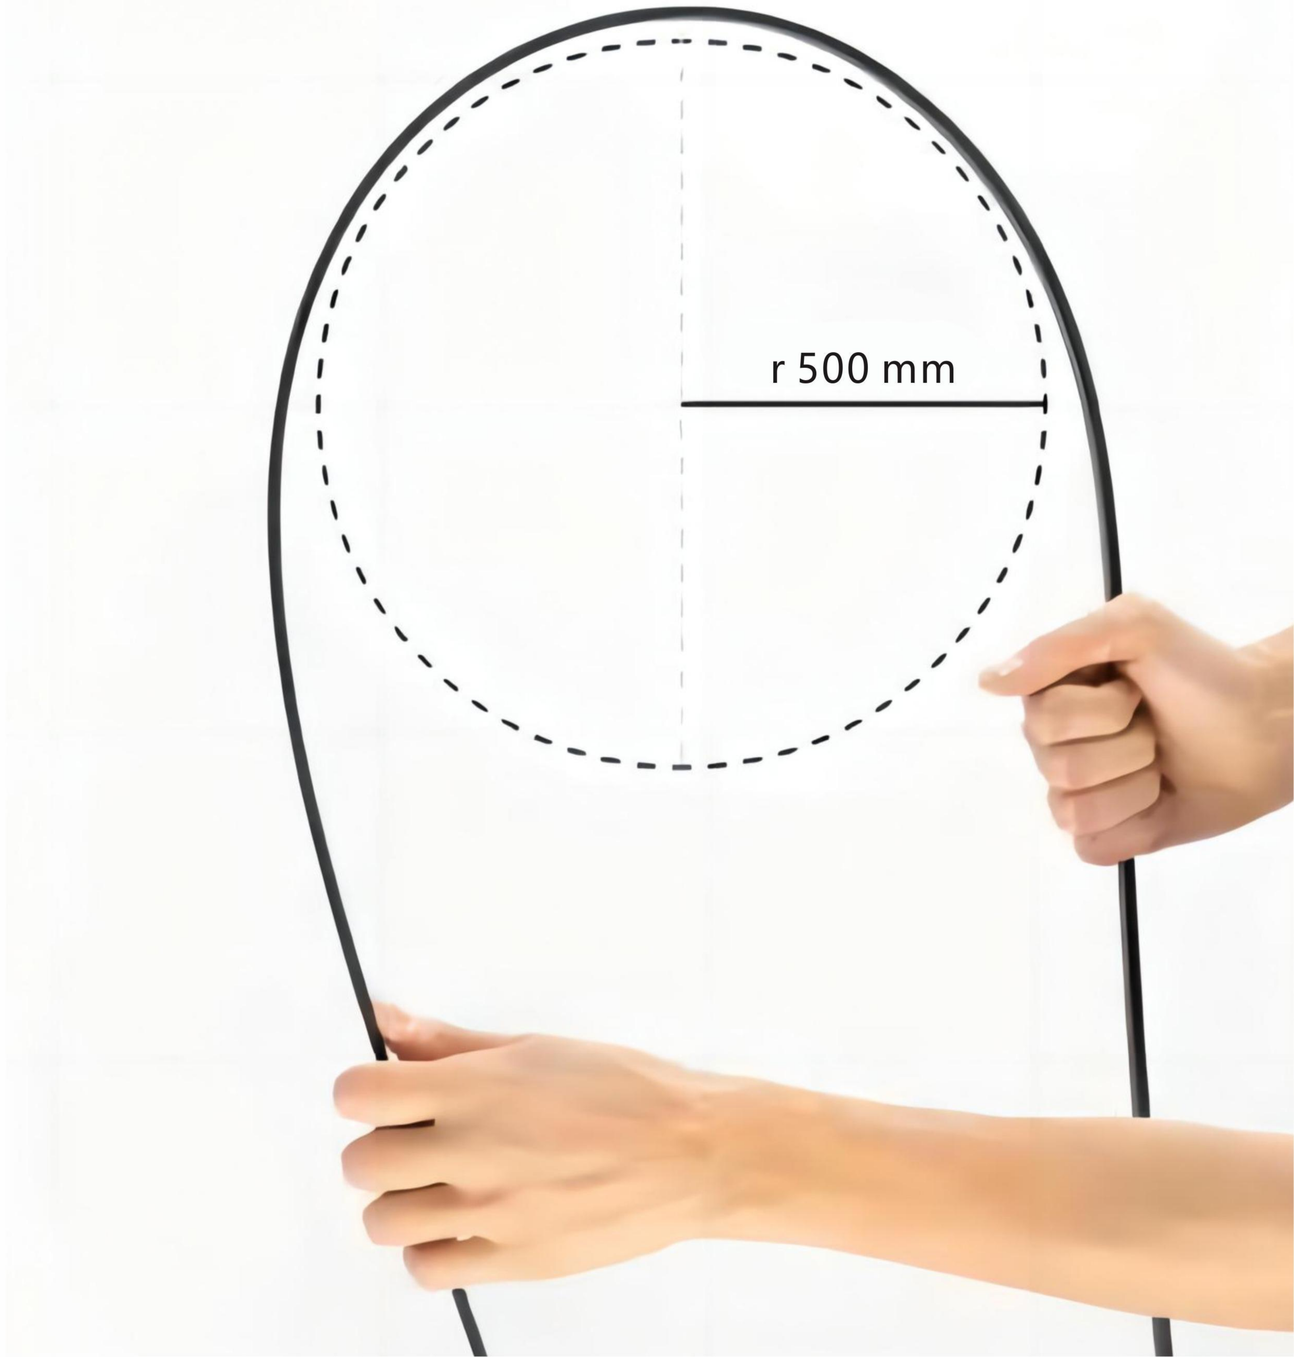

S15 series

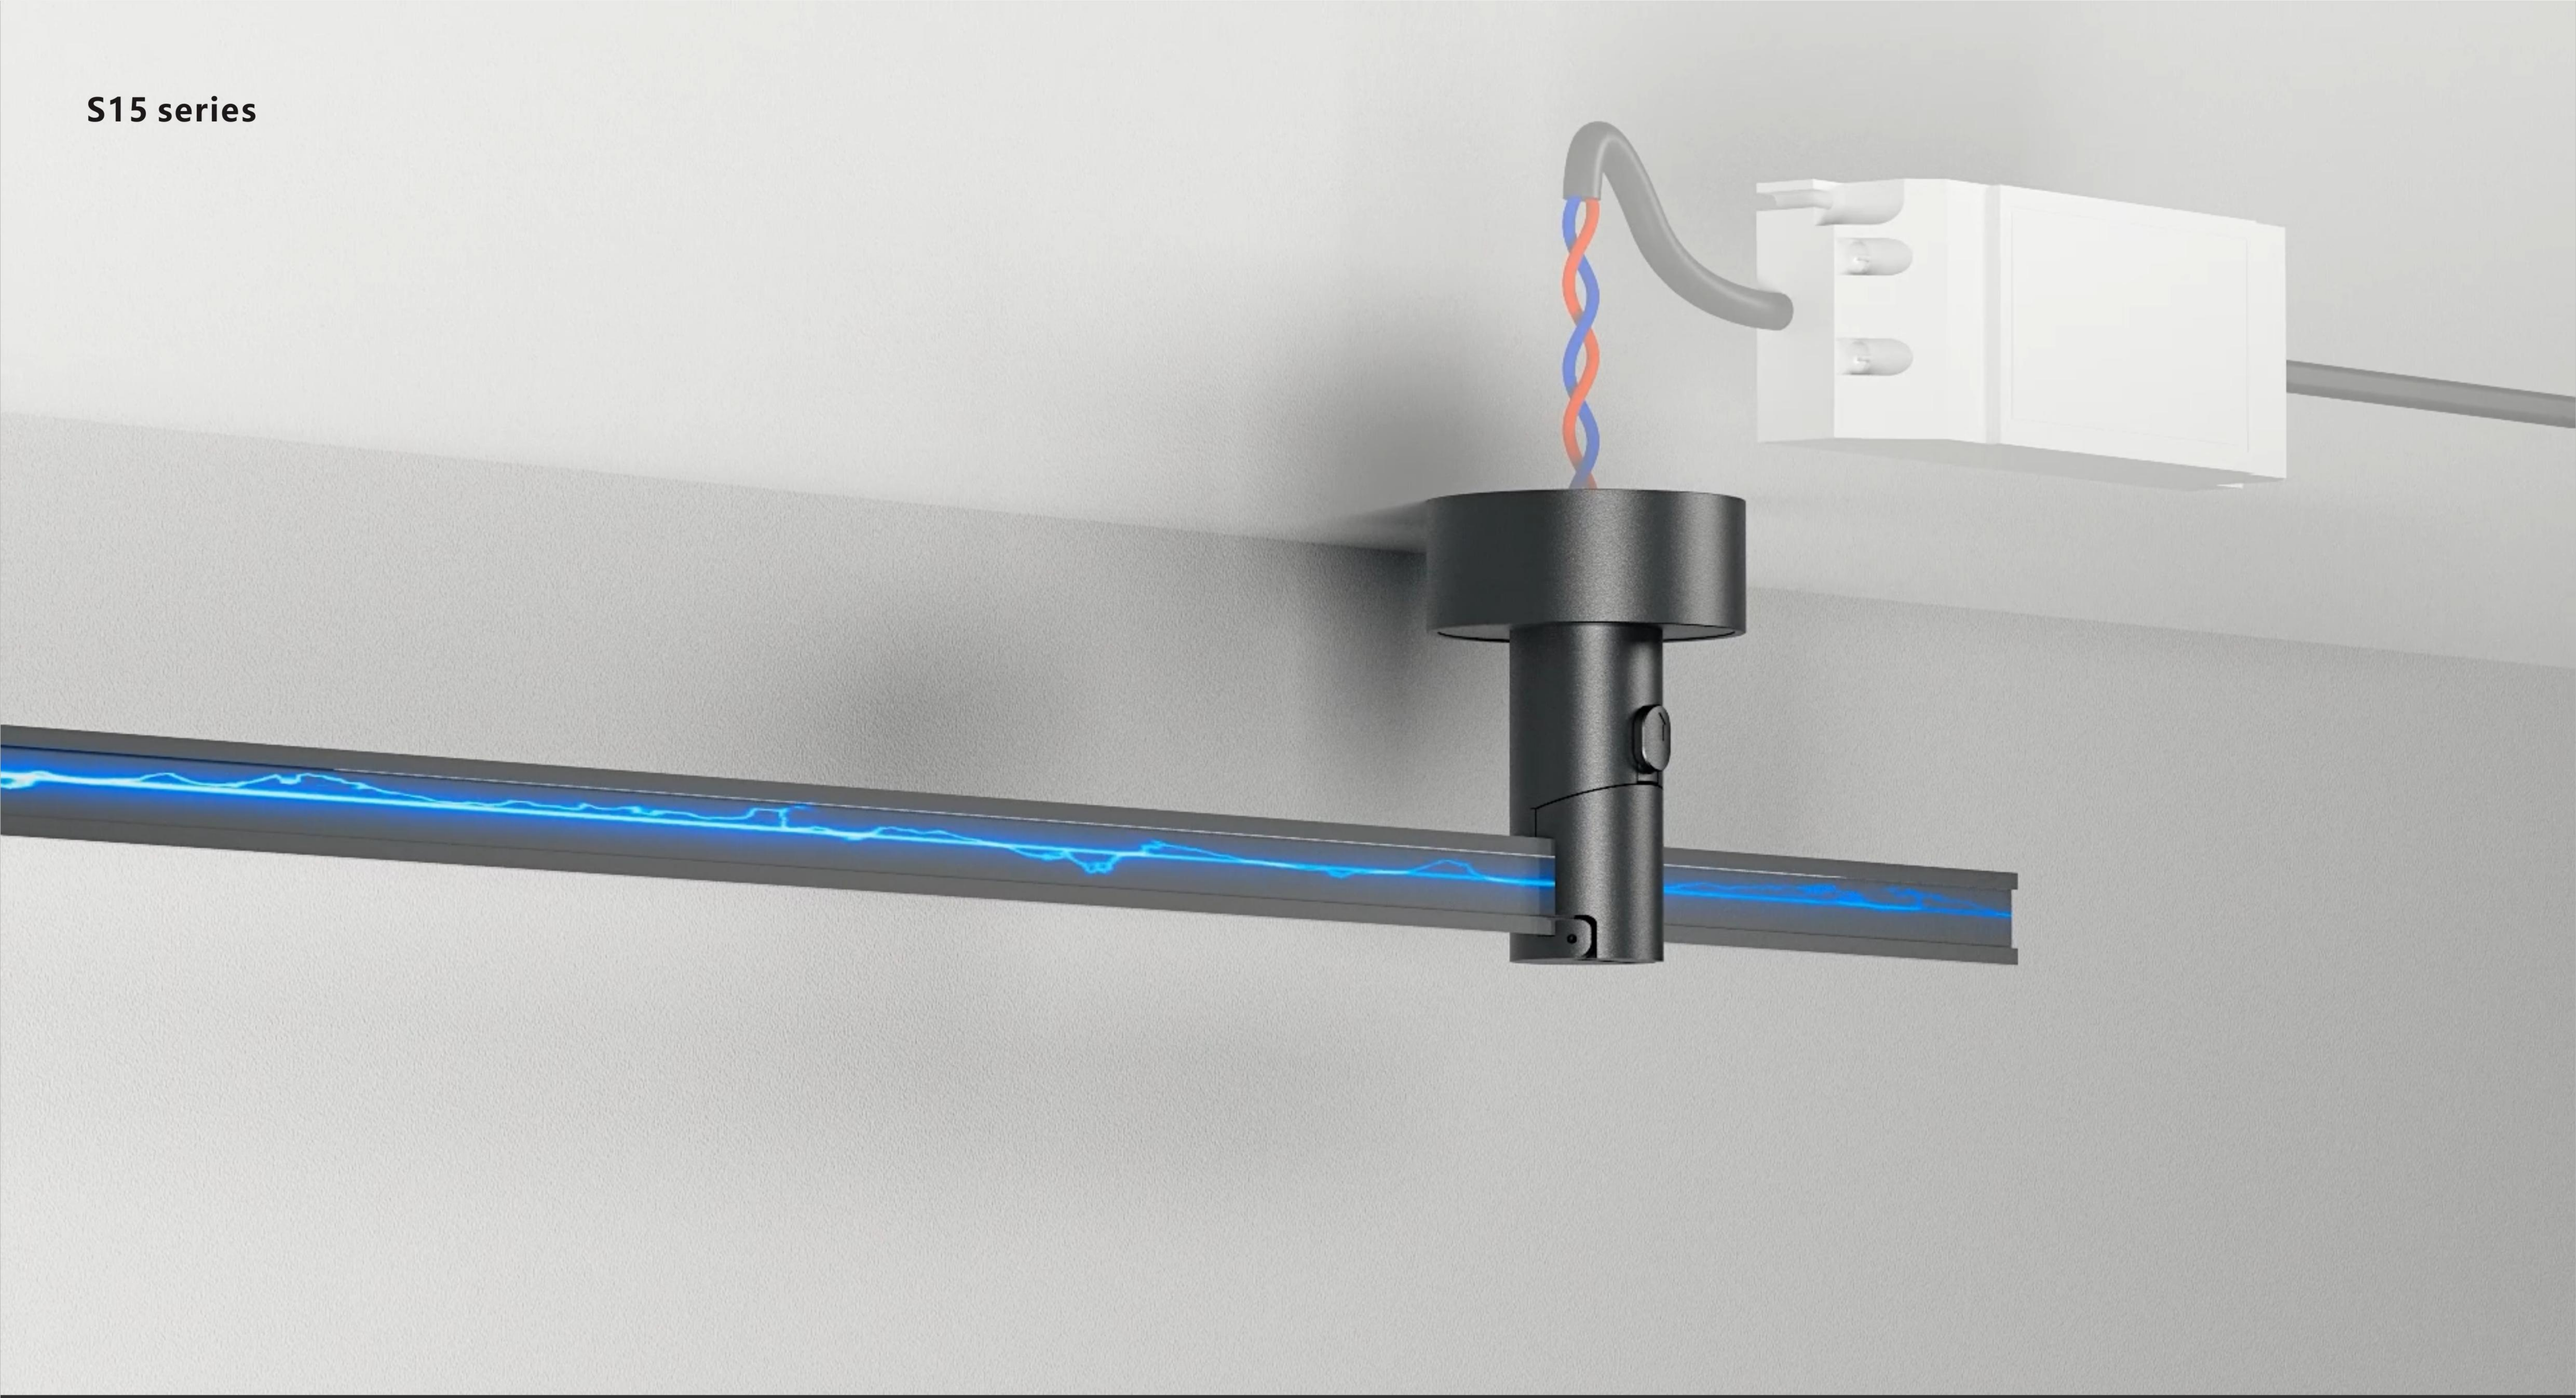


Hidden power supply for better appearance

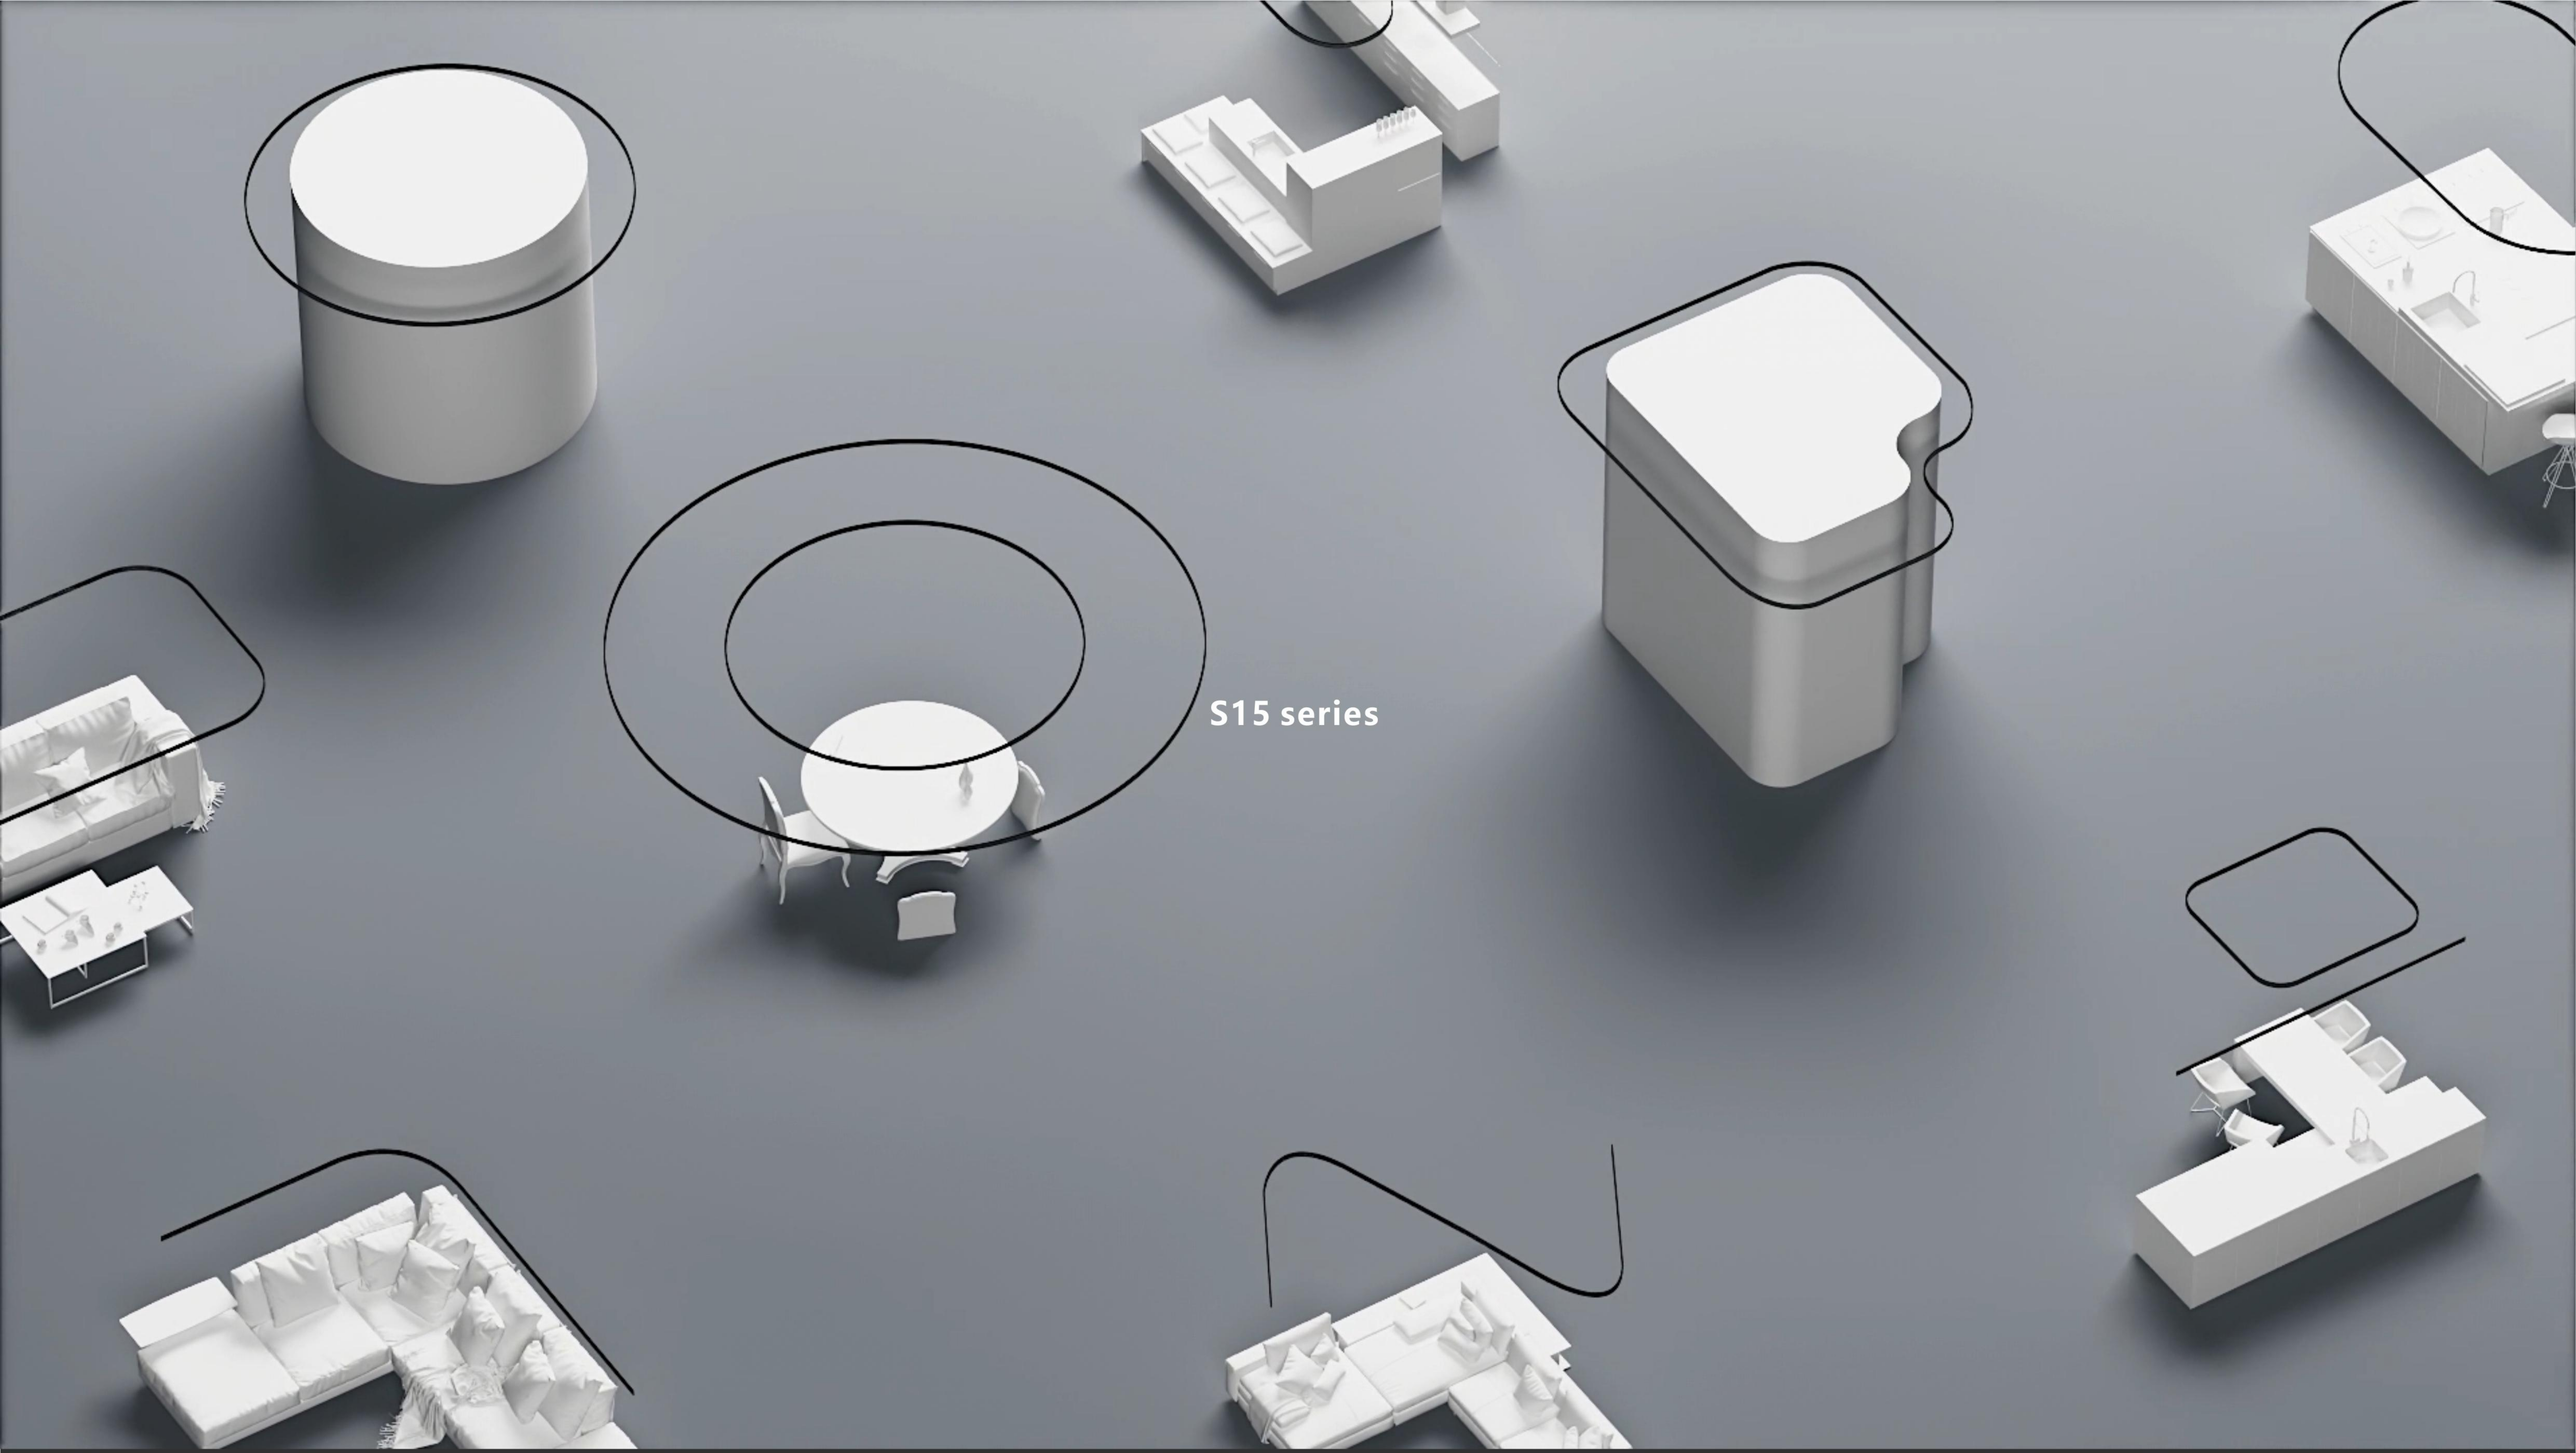


Flexible and soft
free to match adapt to different scene needs

S15 series

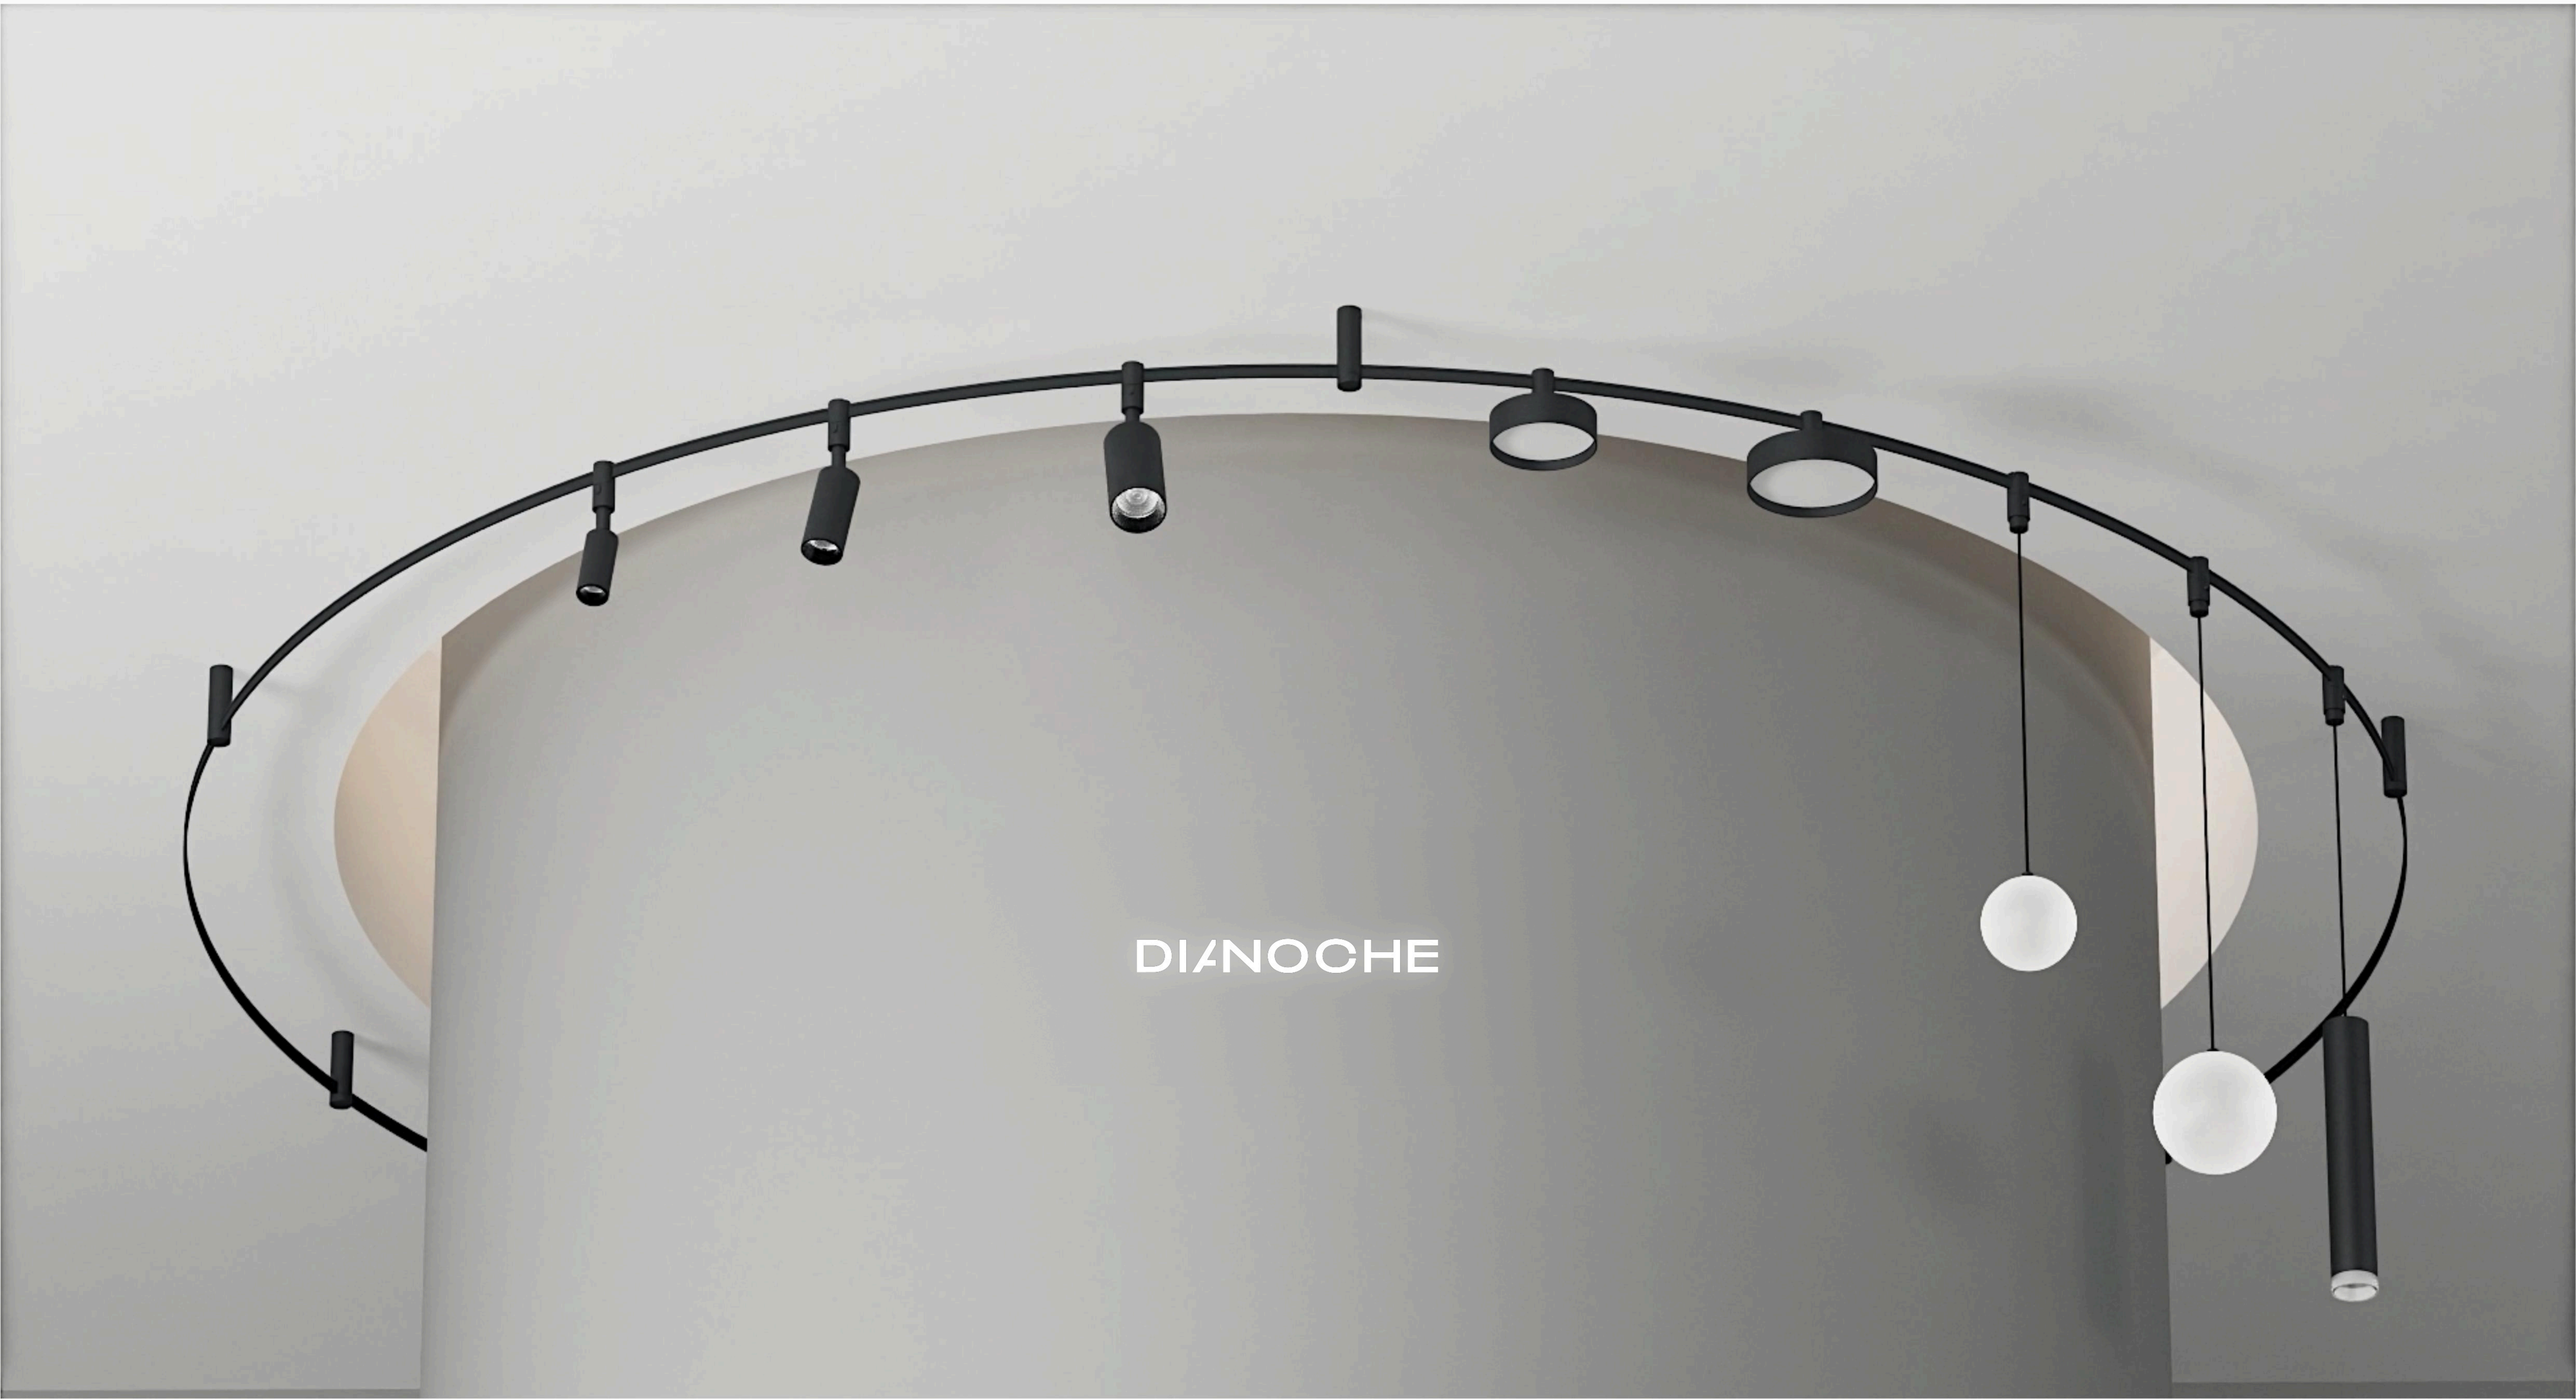

DN-SSA1535DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 150mA

Size:
∅35*80mm

Power:
7W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

DN-SSA1545DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 250mA

Size:
∅45*100mm

Power:
10W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

DN-SSA1560DR







LightSource:
COB

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
36V 350mA

Size:
∅60*120mm

Power:
15W

Material:
Aluminium


OPTIC:
15°/24°/36°

CRI:
Ra>90

Description:
Track Spotlight

DN-SLB1514NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*85mm

Power:
5W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90


Description:
Fixed floodlights

COLORS

BK

DN-SLB1528NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
275*35*85mm

Power:
10W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed floodlights

DN-SLA1505NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*85 mm

Power:
5W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Fixed grille light

DN-SLA1510NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
270*35*85 mm

Power:
10W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Fixed grille light

DN-SSB1514DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*117mm

Power:
5W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90

Description:
Swivel Floodlight


COLORS

BK

S15 Series

DN-SSB1528DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
275*35*117mm

Power:
10W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Swivel Floodlight

DN-SSA1505DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
142*35*117 mm

Power:
5W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Shaker Grille Lamp

DN-SSA1510DR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
270*35*117 mm

Power:
10W

Material:
Aluminium


OPTIC:
24°

CRI:
Ra>90

Description:
Shaker Grille Lamp

DN-SWA1524NR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
276*118*70mm

Power:
24W

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90


Description:
Fixed grille light

COLORS

BK

DN-SSA1524DR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
276*118*102mm

Power:
24W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Shaker Grille Lamp

DN-SSA1524NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
506*118*102 mm

Power:
12W*2

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Fixed grille light without backlight

DN-SSD1524NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
506*118*102mm

Power:
Downward LED 12W*2
Upper LED 8W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Backlit Fixed Grille Lamp

DN-SWA1548NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
18W*2

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90


Description:
Fixed grille light without backlight

COLORS

BK

DN-SWD1548NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
Downward LED 18W*2
Upper LED 15W

Material:
Aluminium


OPTIC:
60°/90°

CRI:
Ra>90

Description:
Backlit Fixed Grille Lamp

DN-SWA1536NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
1006*118*70 mm

Power:
12W*3

Material:
Aluminium

OPTIC:
60°/90°

CRI:
Ra>90

Description:
Fixed grille light
without backlight

DN-SWB1513NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅113*87mm

Power:
12W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed floodlights

DN-SWB1514NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅138*87mm

Power:
20W

Material:
Aluminium

OPTIC:
100°

CRI:
Ra>90


Description:
Fixed floodlights

COLORS

BK

DN-SWB1501NR-A







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅100*156 mm

Power:
5W

Material:
Glass


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

DN-SWB1501NR-B







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅118*131mm

Power:
5W

Material:
Glass

OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

DN-SWB1501NR-C







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅50*160mm

Power:
3W

Material:
Glass


OPTIC:
100°

CRI:
Ra>90

Description:
Fixed

DN-SWB1502NR







LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅60*120mm

Power:
3W

Material:
Glass

OPTIC:
200°

CRI:
Ra>90

Description:
Fixed


COLORS

WH

S15 Series

DN-SWB1503NR





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅80*120mm
Power: 3W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

DN-SWB1504NR





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅100*160mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

DN-SWB1505NR






High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅120*180mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Fixed

DN-SPB1502NR



High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V


Size: ∅60mm
Power: 3W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

COLORS

BK WH

DN-SPB1504NR




High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅100 mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

DN-SPB1505NR



High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 48V

Size: ∅120mm
Power: 5W
Material: Glass

OPTIC: 200°
CRI: Ra>90
Description: Chandelier version

DN-SPA4030NR-A





High CRI IP20


LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 36V 120mA

Size: ∅40*300 mm
Power: 5W
Material: Aluminium

OPTIC: 15°/24°/36°
CRI: Ra>90
Description: Chandelier version

DN-SPA5030NR-A





High CRI IP20

LightSource: LED
CCT: 2700K/3000K/4000K/5000K
Input(V): 48V
Voltage & Current: 36V 250mA

Size: ∅50*300 mm
Power: 10W
Material: Aluminium


OPTIC: 15°/24°/36°
CRI: Ra>90
Description: Chandelier version

COLORS

BK WH

DN-SLS1522-1M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*1000 mm

Power:
16W

Material:
PC


OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

DN-SLS1522-2M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*2000mm

Power:
32W

Material:
PC


OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

DN-SLS1522-3M





High CRI | IP20

LightSource:
LED

CCT:
2700K/3000K/4000K/5000K

Input(V):
48V

Voltage & Current:
48V

Size:
∅22*3000mm

Power:
48W

Material:
PC

luminous flux:
2835 lm

OPTIC:
360°

CRI:
Ra>90

Description:
Flexible Light Bar

COLORS

WH






S15 series

DIANOCHE

S15 series

S15 series

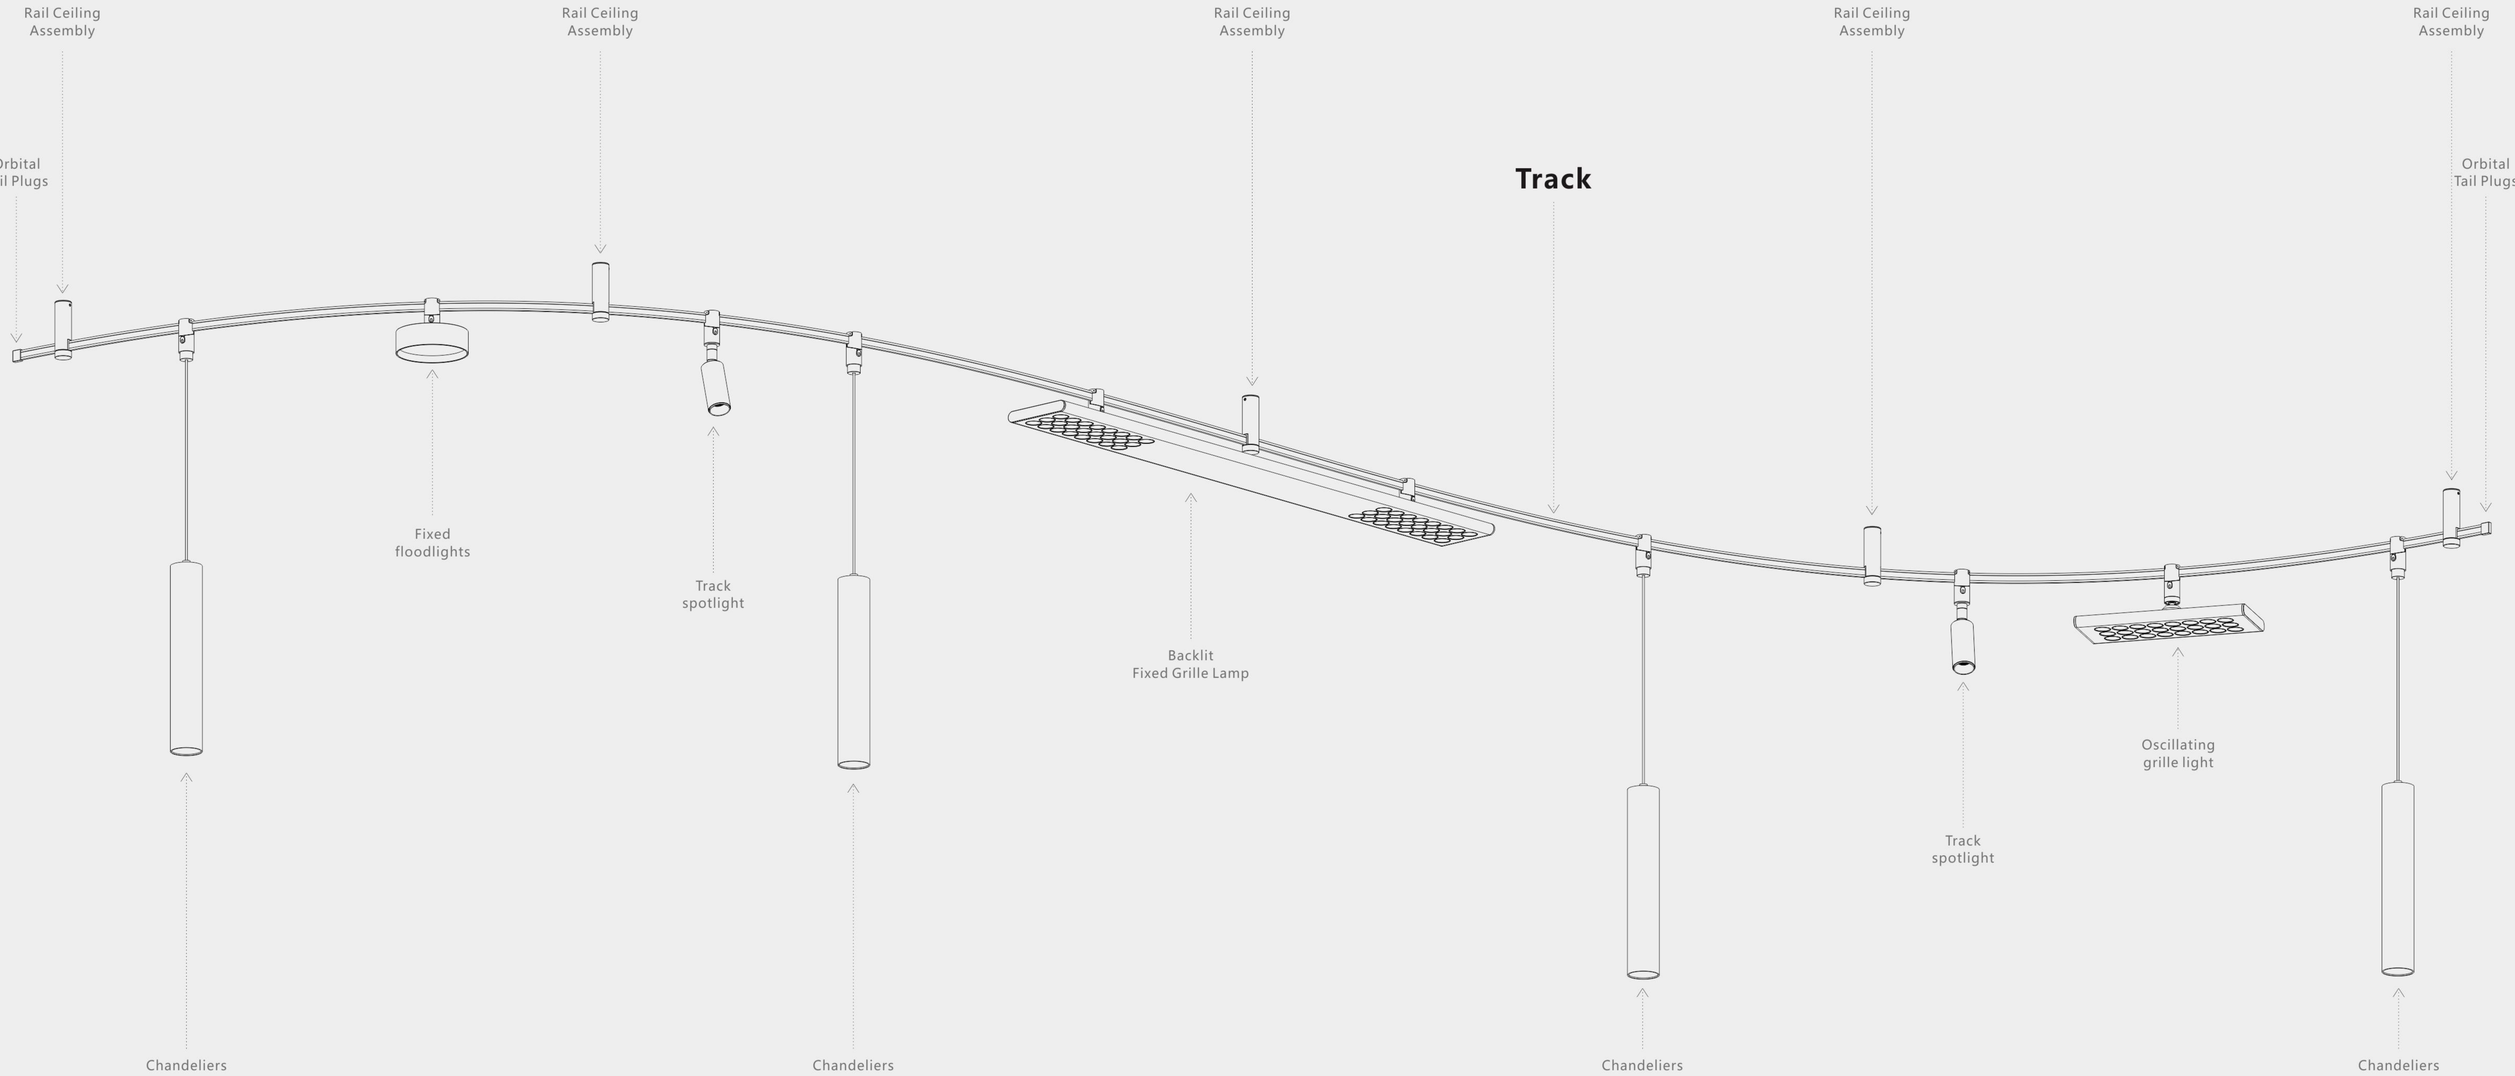
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Rail Ceiling Assembly
Track
Orbital Tail Plugs
Orbital Tail Plugs
Fixed floodlights
Track spotlight
Backlit Fixed Grille Lamp
Oscillating grille light
Track spotlight
Chandeliers
Chandeliers
Chandeliers
Chandeliers


DIANOCHE


DIANOCHE

DIANOCHE

www.dianoche.it
service@dianoche.it