DIANOCHE

DIANOCHE

DIANOCHE

Sparkle


Spot light series


Catalogue 2026



A small luminaire with high output. Mainstream LED sources keep efficacy high, and the beam options cover 10°, 15°, 24°, 36° and 50°.
The body takes two-colour-temperature modules, and the multi-function outer frame accepts a range of functional heads, so a whole scene can be lit with one miniature system.


DIANOCHE
Sparkle spot light series

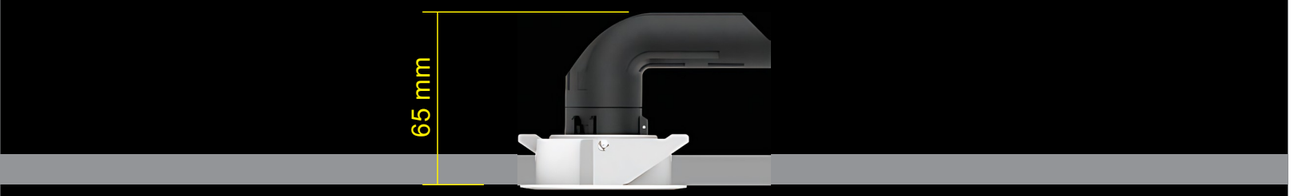

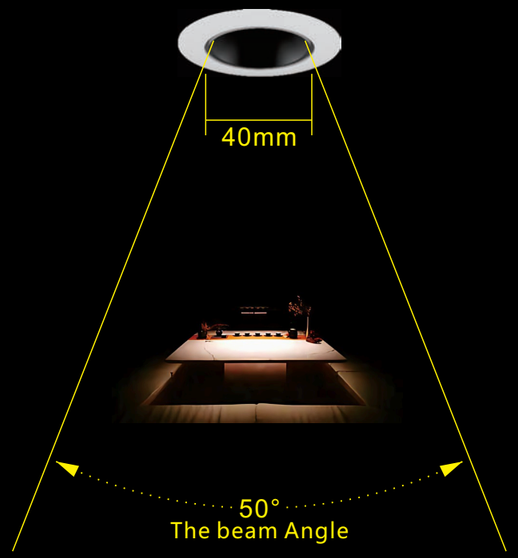

DIANOCHE
Sparkle spot light series




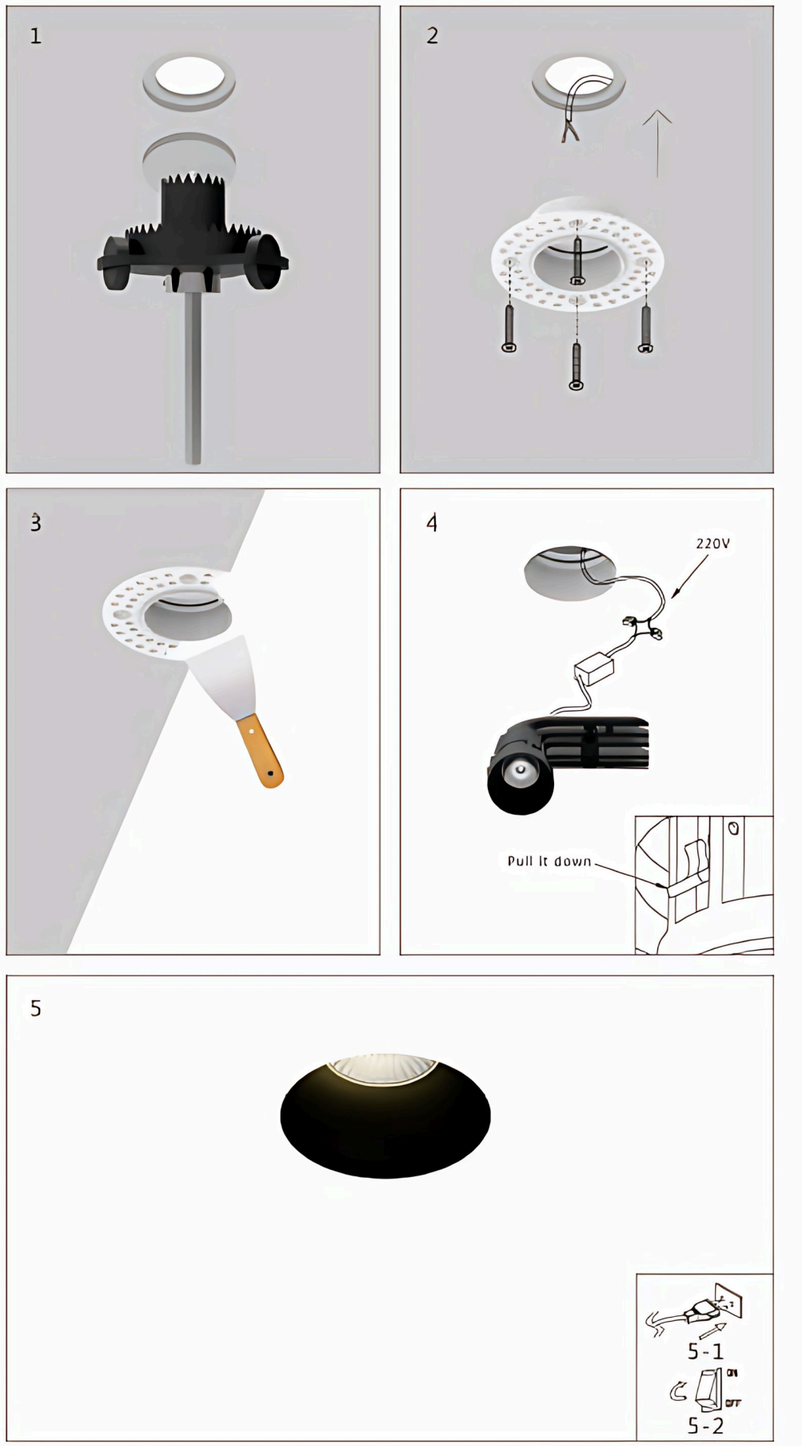


DIANOCHE
Sparkle spot light series

Comparison of light effects

The optic removes the double-ring effect and gives a clean aperture. Intensity at the limit angle is close to 50% of Imax, so the field angle equals the FWHM: the angle at which intensity falls to 50% of Imax.




Sign Technique




Other technologies


Warm dimming

As the light is dimmed, colour temperature moves from 2700K down to 1800K, reproducing the warm fade of a halogen lamp.

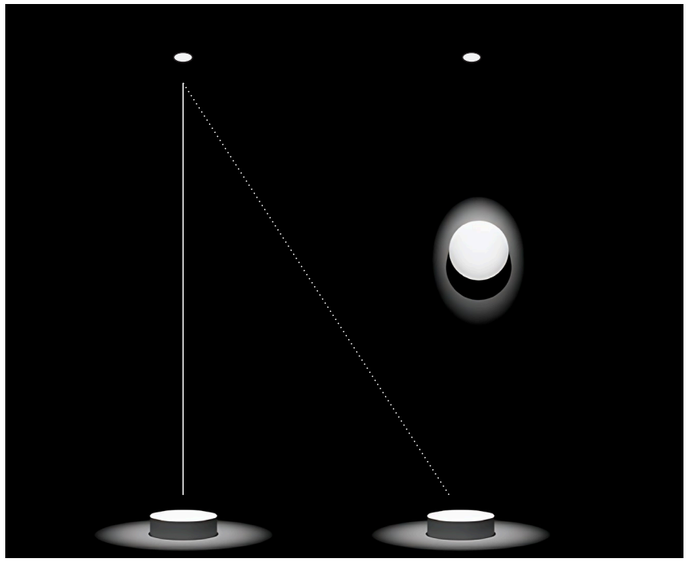

A small visible face and a compact body suit lighting in tight spaces.

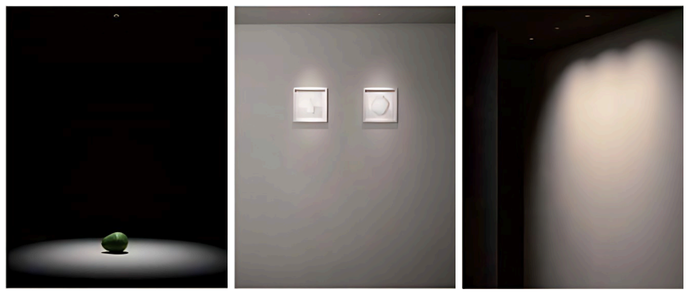

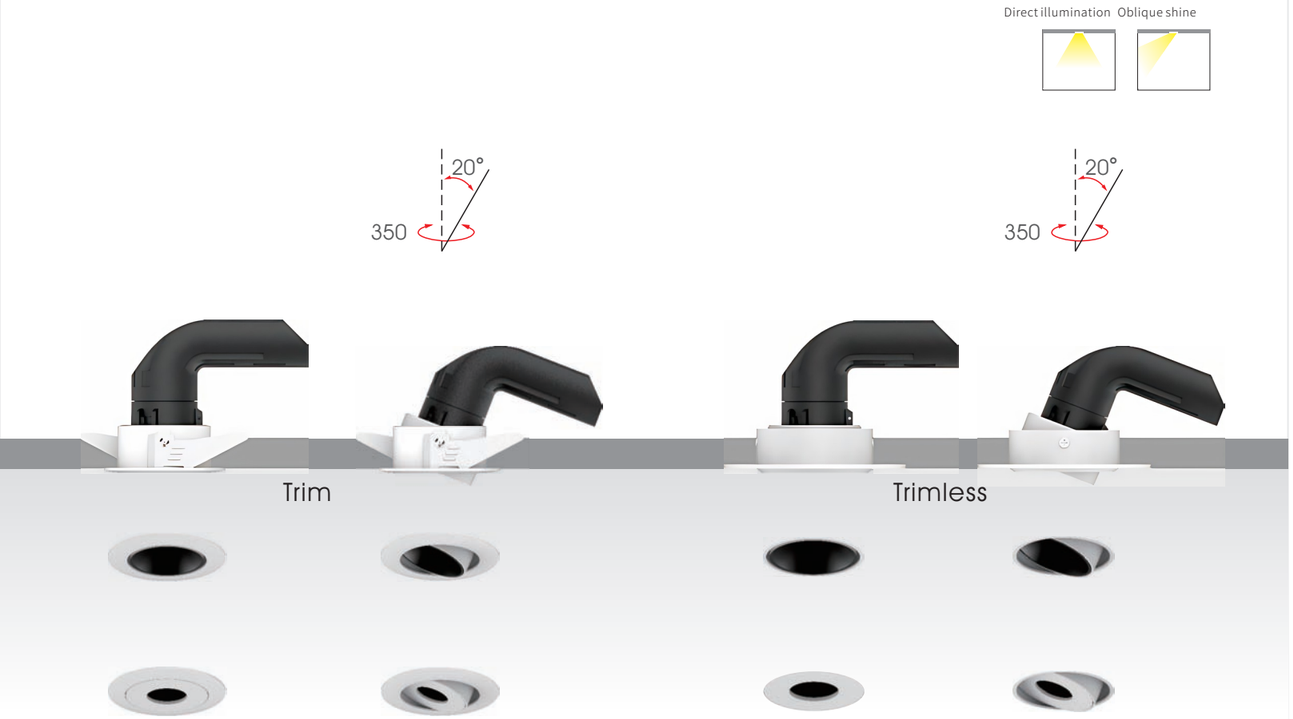



A minimal visible face and installation depth with maximum output. The anti-glare cover is die-cast aluminium with a vacuum-plated finish. Beam options cover 10°, 15°, 24°, 36° and 50°, and the body takes two-colour-temperature modules. Housings can be pre-installed and grouped into lines, circles and other layouts.



DIANOCHE
Sparkle spot light series



IP20 | CE | 3 Year | CREE

DN-2217AF 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°


LED Driver: 36V 180mA / 250mA

Reflector color:


Albino Chrome Gun black Gold Black



Light Distribution 9W 3000K



Light Distribution 12W 3000K





IP20 | CE | 3 Year | CREE

DN-2217AT 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°


LED Driver: 36V 180mA / 250mA

Reflector color:


Albino Chrome Gun black Gold Black



Light Distribution 9W 3000K



Light Distribution 12W 3000K

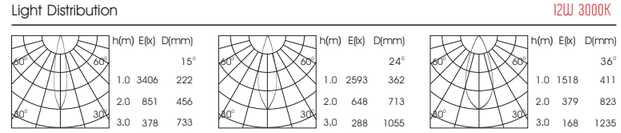



IP20 | CE | 3 Year | CREE

DN-2217BF 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180mA / 250mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	2218	215
2.0	554	441
3.0	246	684
		24°
1.0	1728	353
2.0	432	701
3.0	192	1065
		36°
1.0	903	405
2.0	226	805
3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	3406	222
2.0	851	456
3.0	378	733
		24°
1.0	2593	362
2.0	648	713
3.0	288	1055
		36°
1.0	1518	411
2.0	379	823
3.0	168	1235



IP20 | CE | 3 Year | CREE

DN-2217BT 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180mA / 250mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	2218	215
2.0	554	441
3.0	246	684
		24°
1.0	1728	353
2.0	432	701
3.0	192	1065
		36°
1.0	903	405
2.0	226	805
3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	3406	222
2.0	851	456
3.0	378	733
		24°
1.0	2593	362
2.0	648	713
3.0	288	1055
		36°
1.0	1518	411
2.0	379	823
3.0	168	1235



IP20 | CE | 3 Year | CREE

DN-2217CF 9W/12W

INCL.LED: CREE / Luminus


COB: 9/12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180/250mA

Reflector color:

Albino Black



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	2218	215
2.0	554	441
3.0	246	684
		24°
1.0	1728	353
2.0	432	701
3.0	192	1065
		36°
1.0	903	405
2.0	226	805
3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	3406	222
2.0	851	456
3.0	378	733
		24°
1.0	2593	362
2.0	648	713
3.0	288	1055
		36°
1.0	1518	411
2.0	379	823
3.0	168	1235



IP20 | CE | 3 Year | CREE

DN-2217CT 9W/12W

INCL.LED: CREE / Luminus


COB: 9/12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180/250mA

Reflector color:

Albino Black



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	2218	215
2.0	554	441
3.0	246	684
		24°
1.0	1728	353
2.0	432	701
3.0	192	1065
		36°
1.0	903	405
2.0	226	805
3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)
		15°
1.0	3406	222
2.0	851	456
3.0	378	733
		24°
1.0	2593	362
2.0	648	713
3.0	288	1055
		36°
1.0	1518	411
2.0	379	823
3.0	168	1235

Direct illumination Oblique shine





A small luminaire with high output, using mainstream LED sources for high efficacy. Beam options cover 10°, 15°, 24°, 36° and 50°, the body takes two-colour-temperature modules, and the design is classic and screw-free.



IP20 CE 3 CREE

DN-2217EF 9W/12W

INCL.LED: CREE / Luminus


COB: 7W / 9W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 150/180mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 7W 3000K

h(m)	15° E(lx)	15° D(mm)	24° E(lx)	24° D(mm)	36° E(lx)	36° D(mm)
1.0	2083	215	1525	353	803	405
2.0	454	441	335	701	176	805
3.0	196	684	132	1065	89	1203

Light Distribution 9W 3000K

h(m)	15° E(lx)	15° D(mm)	24° E(lx)	24° D(mm)	36° E(lx)	36° D(mm)
1.0	2218	215	1728	353	903	405
2.0	554	441	432	701	226	805
3.0	246	684	192	1065	100	1203



IP20 CE 3 CREE

DN-2217ET 9W/12W

INCL.LED: CREE / Luminus


COB: 7W / 9W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 150/180mA

Reflector color:

Albino Chrome Gunblack Gold Black



Light Distribution 7W 3000K

h(m)	15° E(lx)	15° D(mm)	24° E(lx)	24° D(mm)	36° E(lx)	36° D(mm)
1.0	2083	215	1525	353	803	405
2.0	454	441	335	701	176	805
3.0	196	684	132	1065	89	1203

Light Distribution 9W 3000K

h(m)	15° E(lx)	15° D(mm)	24° E(lx)	24° D(mm)	36° E(lx)	36° D(mm)
1.0	2218	215	1728	353	903	405
2.0	554	441	432	701	226	805
3.0	246	684	192	1065	100	1203



IP20 | CE | | 3 Year | | CREE

DN-2217EF 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 200mA/300mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 10W 3000K

h(m)	E(lx)	D(mm)						
		15°			24°			36°
1.0	2218	215	1.0	1728	353	1.0	903	405
2.0	554	441	2.0	432	701	2.0	226	805
3.0	246	684	3.0	192	1065	3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)						
		15°			24°			36°
1.0	3406	222	1.0	2593	362	1.0	1518	411
2.0	851	456	2.0	648	713	2.0	379	823
3.0	378	733	3.0	288	1055	3.0	168	1235



IP20 | CE | | 3 Year | | CREE

DN-2217ET 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 200mA/300mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 10W 3000K

h(m)	E(lx)	D(mm)						
		15°			24°			36°
1.0	2218	215	1.0	1728	353	1.0	903	405
2.0	554	441	2.0	432	701	2.0	226	805
3.0	246	684	3.0	192	1065	3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)						
		15°			24°			36°
1.0	3406	222	1.0	2593	362	1.0	1518	411
2.0	851	456	2.0	648	713	2.0	379	823
3.0	378	733	3.0	288	1055	3.0	168	1235

DIANOCHE
Sparkle spot light series



Direct illumination



Takes two-colour-temperature and RGBW modules. With the matching control module the same luminaire works as general lighting and as decorative light that changes with the scene.

DIANOCHE
Sparkle spot light series



IP20 | CE | 3 YEAR | CREE

DN-2217FF 9W/12W

INCL.LED: CREE / Luminus


COB: 5W

OPTIC: 100°

LED Driver: 36V 120mA

Body color:

FROSTED surface



Light Distribution 5W 3000K

h(m)	E(lx)	D(mm)
		100°
1.0	218	215
2.0	54	441
3.0	16	684



IP20 | CE | 3 YEAR | CREE

DN-2217FT 9W-12W

INCL.LED: CREE / Luminus


COB: 5W

OPTIC: 100°

LED Driver: 36V 120mA

Body color:

FROSTED surface



Light Distribution 5W 3000K

h(m)	E(lx)	D(mm)
		100°
1.0	218	215
2.0	54	441
3.0	16	684



IP20 | CE | 3 Year | CREE

DN-2217GF 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180mA / 250mA

Body color:

FROSTED surface | CLEAR surface



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
		15°				24°				36°
1.0	2218	215		1.0	1728	353		1.0	903	405
2.0	554	441		2.0	432	701		2.0	226	805
3.0	246	684		3.0	192	1065		3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
		15°				24°				36°
1.0	3406	222		1.0	2593	362		1.0	1518	411
2.0	851	456		2.0	648	713		2.0	379	823
3.0	378	733		3.0	288	1055		3.0	168	1235



IP20 | CE | 3 Year | CREE

DN-2217GT 9W/12W

INCL.LED: CREE / Luminus


COB: 9W / 12W

OPTIC: 10/15/24/36/50°

LED Driver: 36V 180mA / 250mA

Body color:

FROSTED surface | CLEAR surface



Light Distribution 9W 3000K

h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
		15°				24°				36°
1.0	2218	215		1.0	1728	353		1.0	903	405
2.0	554	441		2.0	432	701		2.0	226	805
3.0	246	684		3.0	192	1065		3.0	100	1203

Light Distribution 12W 3000K

h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)		h(m)	E(lx)	D(mm)
		15°				24°				36°
1.0	3406	222		1.0	2593	362		1.0	1518	411
2.0	851	456		2.0	648	713		2.0	379	823
3.0	378	733		3.0	288	1055		3.0	168	1235

DIANOCHE
Sparkle spot light series





DIANOCHE
Sparkle spot light series



IP20 | CE | 3 Years | CREE

DN-2217PF 7W

INCL.LED: CREE / Luminus


COB: 7W

OPTIC: 15/24/36°


LED Driver: 36V 150mA

Reflector color:

Albino Chrome Gun black Gold Black



Light Distribution 7W 3000K





IP20 | CE | 3 Years | CREE

DN-2217PT 7W

INCL.LED: CREE / Luminus


COB: 7W

OPTIC: 15/24/36°


LED Driver: 36V 150mA

Reflector color:


Albino Chrome Gun black Gold Black



Light Distribution 7W 3000K







IP20 | CE | 3 YEAR | CREE

DN-2217PF 5W

INCL.LED: CREE / Luminus

SMD: 5W

OPTIC: 30°

LED Driver: 3V 1200mA

Reflector color:


Albino Chrome Gun black Gold Black

Light Distribution 5W 3000K



h(m)	E(lx)	D(mm)
		30°
1.0	789	597
2.0	198	1195
3.0	88	1793





IP20 | CE | 3 YEAR | CREE

DN-2217PT 5W

INCL.LED: CREE / Luminus

SMD: 5W

OPTIC: 30°

LED Driver: 3V 1200mA

Reflector color:

Albino Chrome Gun black Gold Black

Light Distribution 5W 3000K



h(m)	E(lx)	D(mm)
		30°
1.0	789	597
2.0	198	1195
3.0	88	1793

DIANOCHE
Sparkle spot light series



DIANOCHE

www.dianoche.it
service@dianoche.it