DIANOCHE

Mini magnetic track

W05 system

Catalogue 2026


DIANOCHE

A 5 mm magnetic lighting track

DIANOCHE

Mini
magnetic track



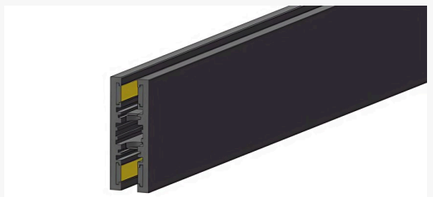

Dual-directional lighting track,
expanding illumination possibilities
for diverse spaces.

Mini

magnetic track


E x t r e m e l y
s l i m
d e s i g n

E x t r e m e l y

s l i m


d e s i g n




Mini
magnetic track

Multiple linking methods
can be used in combination


and creativity
can be created by you

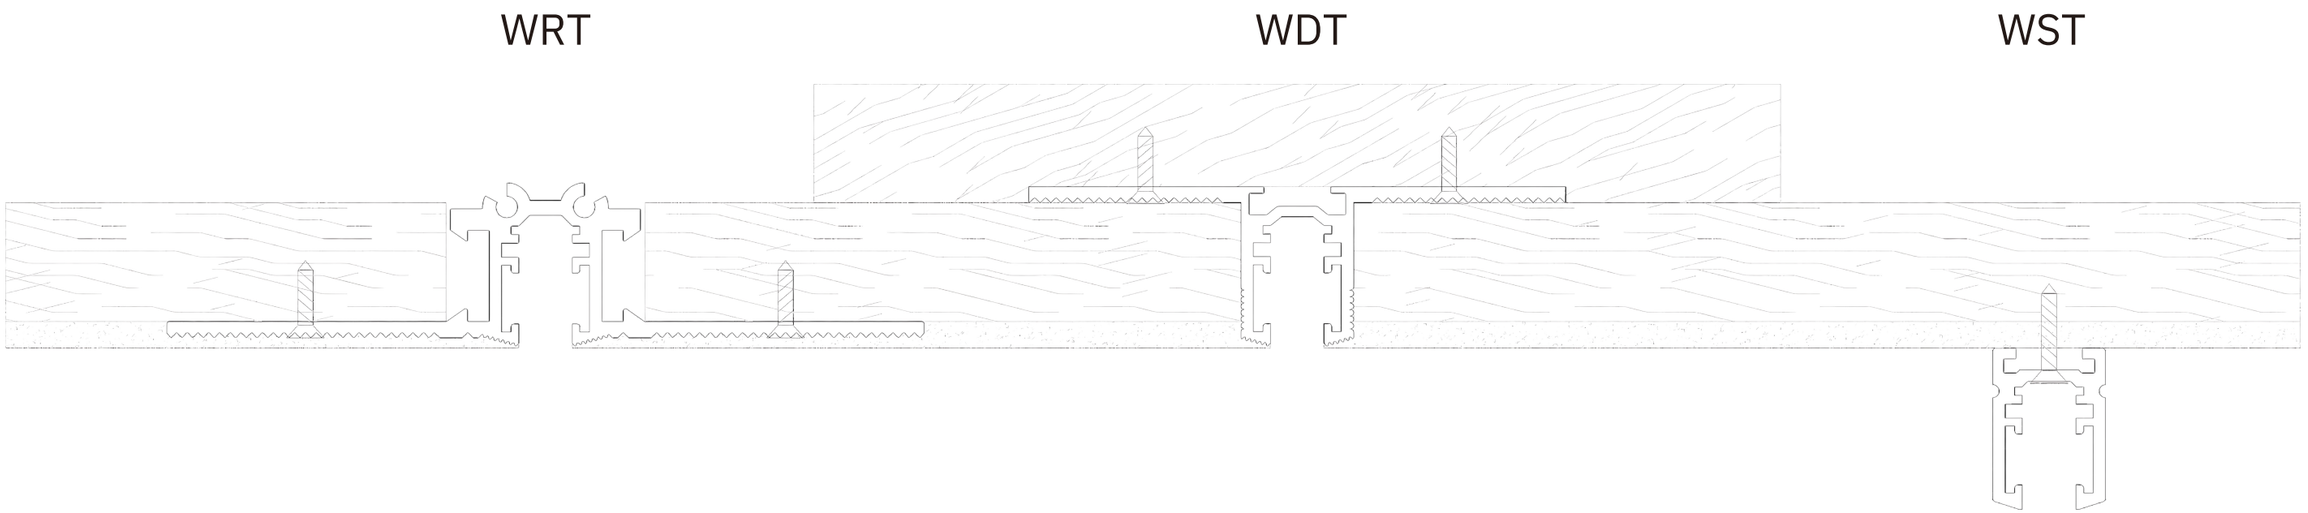
WRT
WDT
WST

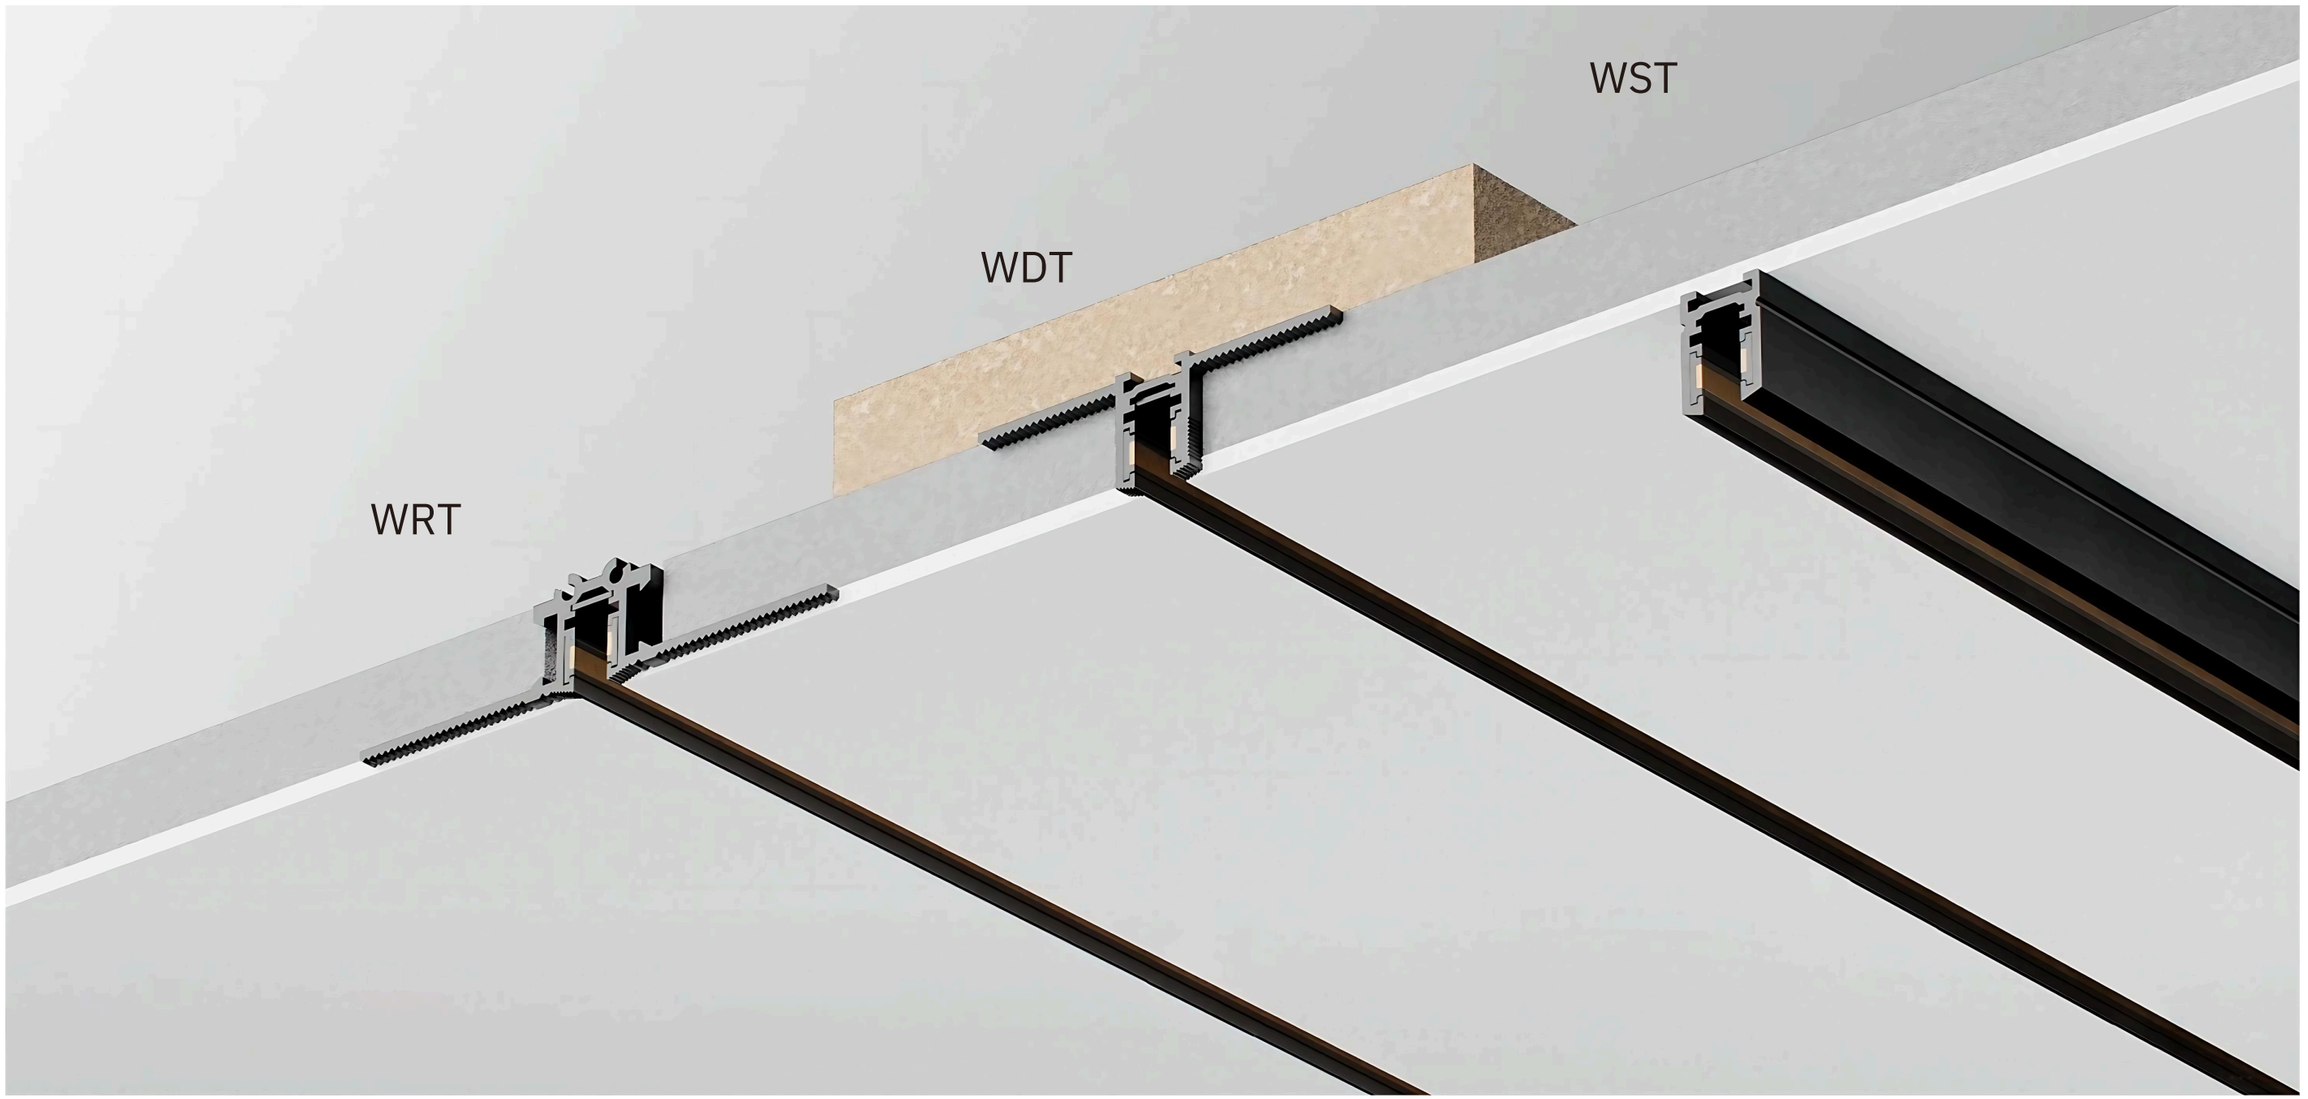

WST
WDT
WRT

WRT Track (flush mounting)







Type	Electrical parameters	Maximum current	Length (mm)
DN-WRT-0.5M	DC 24V	4A max	500
DN-WRT-1M	DC 24V	4A max	1000
DN-WRT-2M	DC 24V	4A max	2000
DN-WRT-3M	DC 24V	4A max	3000




DN-WRT-L01




DN-WRT-J01




DN-WRT-J02




DN-WT-E01




DN-WT-E02




DN-WT-END



DN-WRT-C01




DN-WT-E04




DN-WT0524100W

WST Track (surface mounting)






Type	Electrical parameters	Maximum current	Length (mm)
DN-WST-0.5M	DC 24V	4A max	500
DN-WST-1M	DC 24V	4A max	1000
DN-WST-2M	DC 24V	4A max	2000
DN-WST-3M	DC 24V	4A max	3000



DN-WST-L02



DN-WST-J02




DN-WST-C01




DN-WST-P01

WDT Track (clamp plate)





Type	Electrical parameters	Maximum current	Length (mm)
DN-WDT-0.5M	DC 24V	4A max	500
DN-WDT-1M	DC 24V	4A max	1000
DN-WDT-2M	DC 24V	4A max	2000
DN-WDT-3M	DC 24V	4A max	3000




DN-WDT-L01



DN-WDT-J01


WOT Track (surface mounting)



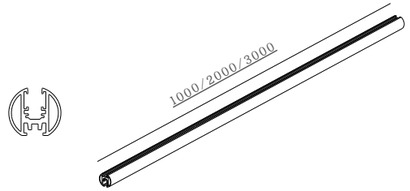

DN-WOT-1M /2M / 3M


Type	Electrical parameters	Maximum current	Length (mm)
DN-WOT-1M	DC 24V	4A max	1000
DN-WOT-2M	DC 24V	4A max	2000
DN-WOT-3M	DC 24V	4A max	3000



DN-WOT-L01



DN-WOT-END



DN-WOT-B01




DN-WOT-B02



Power adapter




DN-WOT-E01

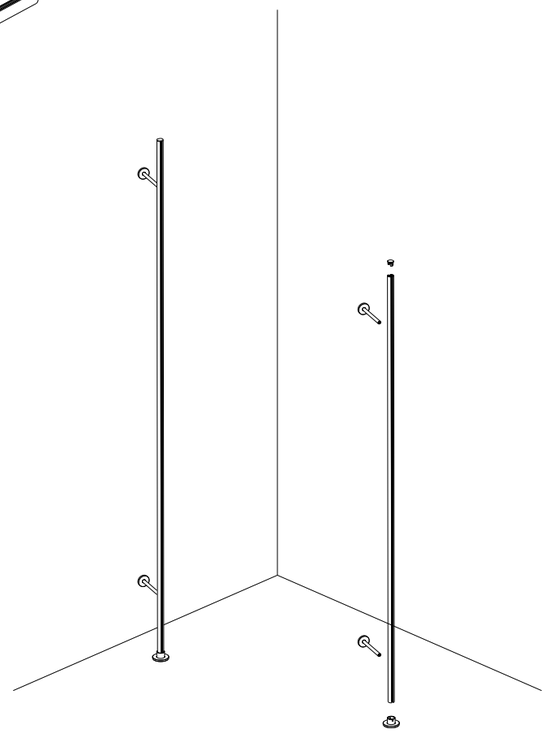


WRT Track (flush mounting)






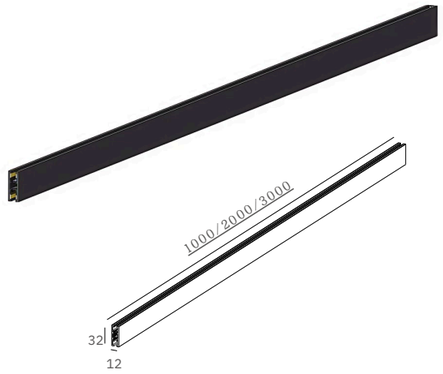


Type	Electrical parameters	Maximum current	Length (mm)
DN-W05HT-1M	DC 24V	4A max	12 x 32x1000
DN-W05HT-2M	DC 24V	4A max	12 x 32x2000
DN-W05HT-3M	DC 24V	4A max	12 x 32x3000

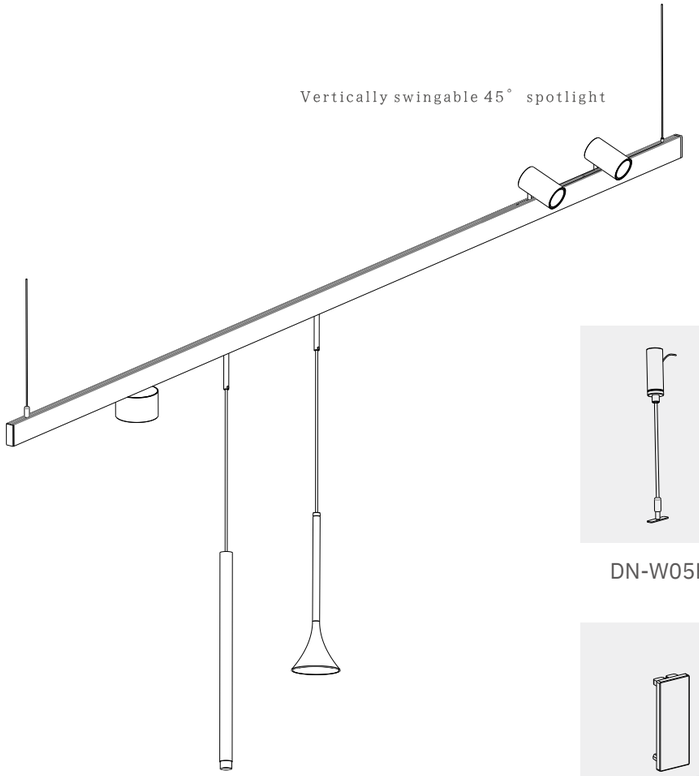





DN-W05HT-P01




DN-WRT-C01




DN-W05HT-END




DN-WT-E01-P

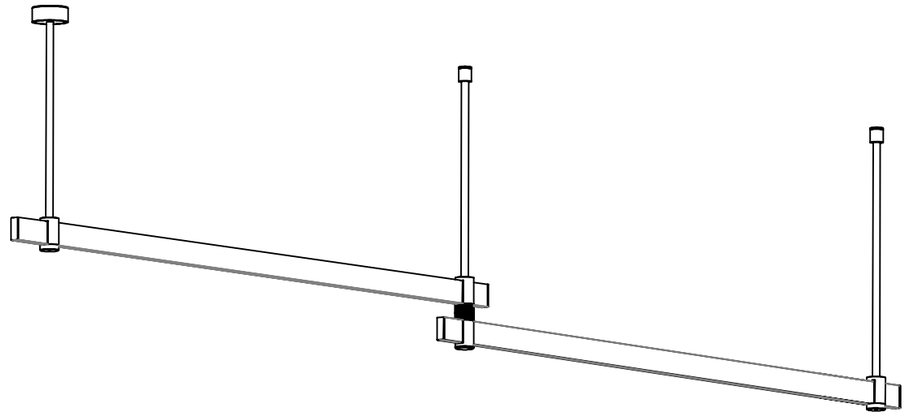





DN-W05HT-W01-300




DN-W05HT-W02-300




DN-W05HT-W03-300



DN-W05HT-W01-700




DN-W05HT-W02-700




DN-W05HT-W03-700

WDT Track (clamp plate)





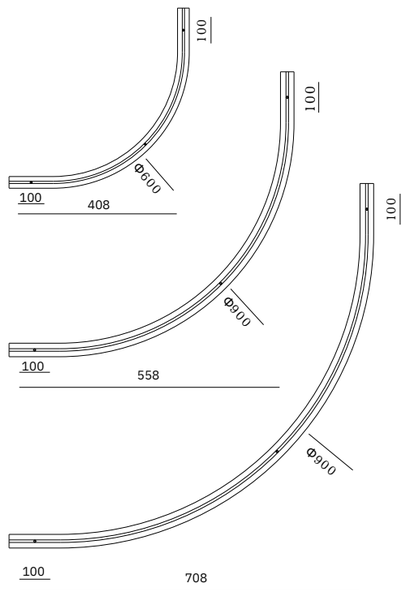



Type	Electrical parameters	Maximum current	Length (mm)
DN-WDT-R600Q	DC 24V	4A max	Φ600
DN-WDT-R900Q	DC 24V	4A max	Φ900
DN-WDT-R1200Q	DC 24V	4A max	Φ1200



WST Track (surface mounting)





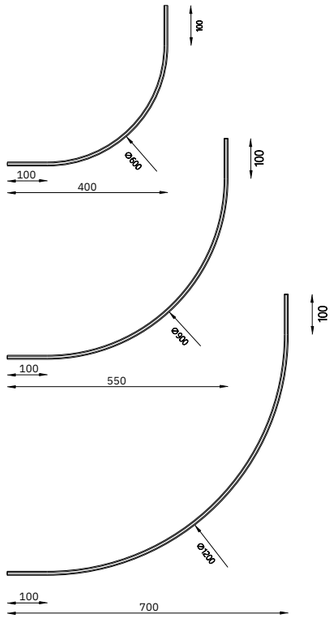


Type	Electrical parameters	Maximum current	Rounded corners
DN-WST-R600Q	DC 24V	4A max	Φ600
DN-WST-R900Q	DC 24V	4A max	Φ900
DN-WST-R1200Q	DC 24V	4A max	Φ1200



WOT Track (surface mounting)





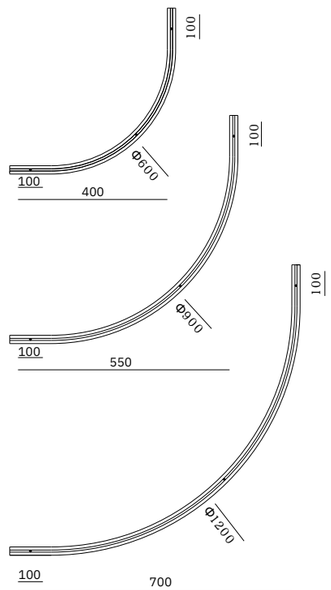


Type	Electrical parameters	Maximum current	Length (mm)
DN-WOT-R600Q	DC 24V	4A max	Φ600
DN-WOT-R900Q	DC 24V	4A max	Φ900
DN-WOT-R1200Q	DC 24V	4A max	Φ1200



W05HT Track (upper and lower energised suspension line installation)

Mini
magnetic track




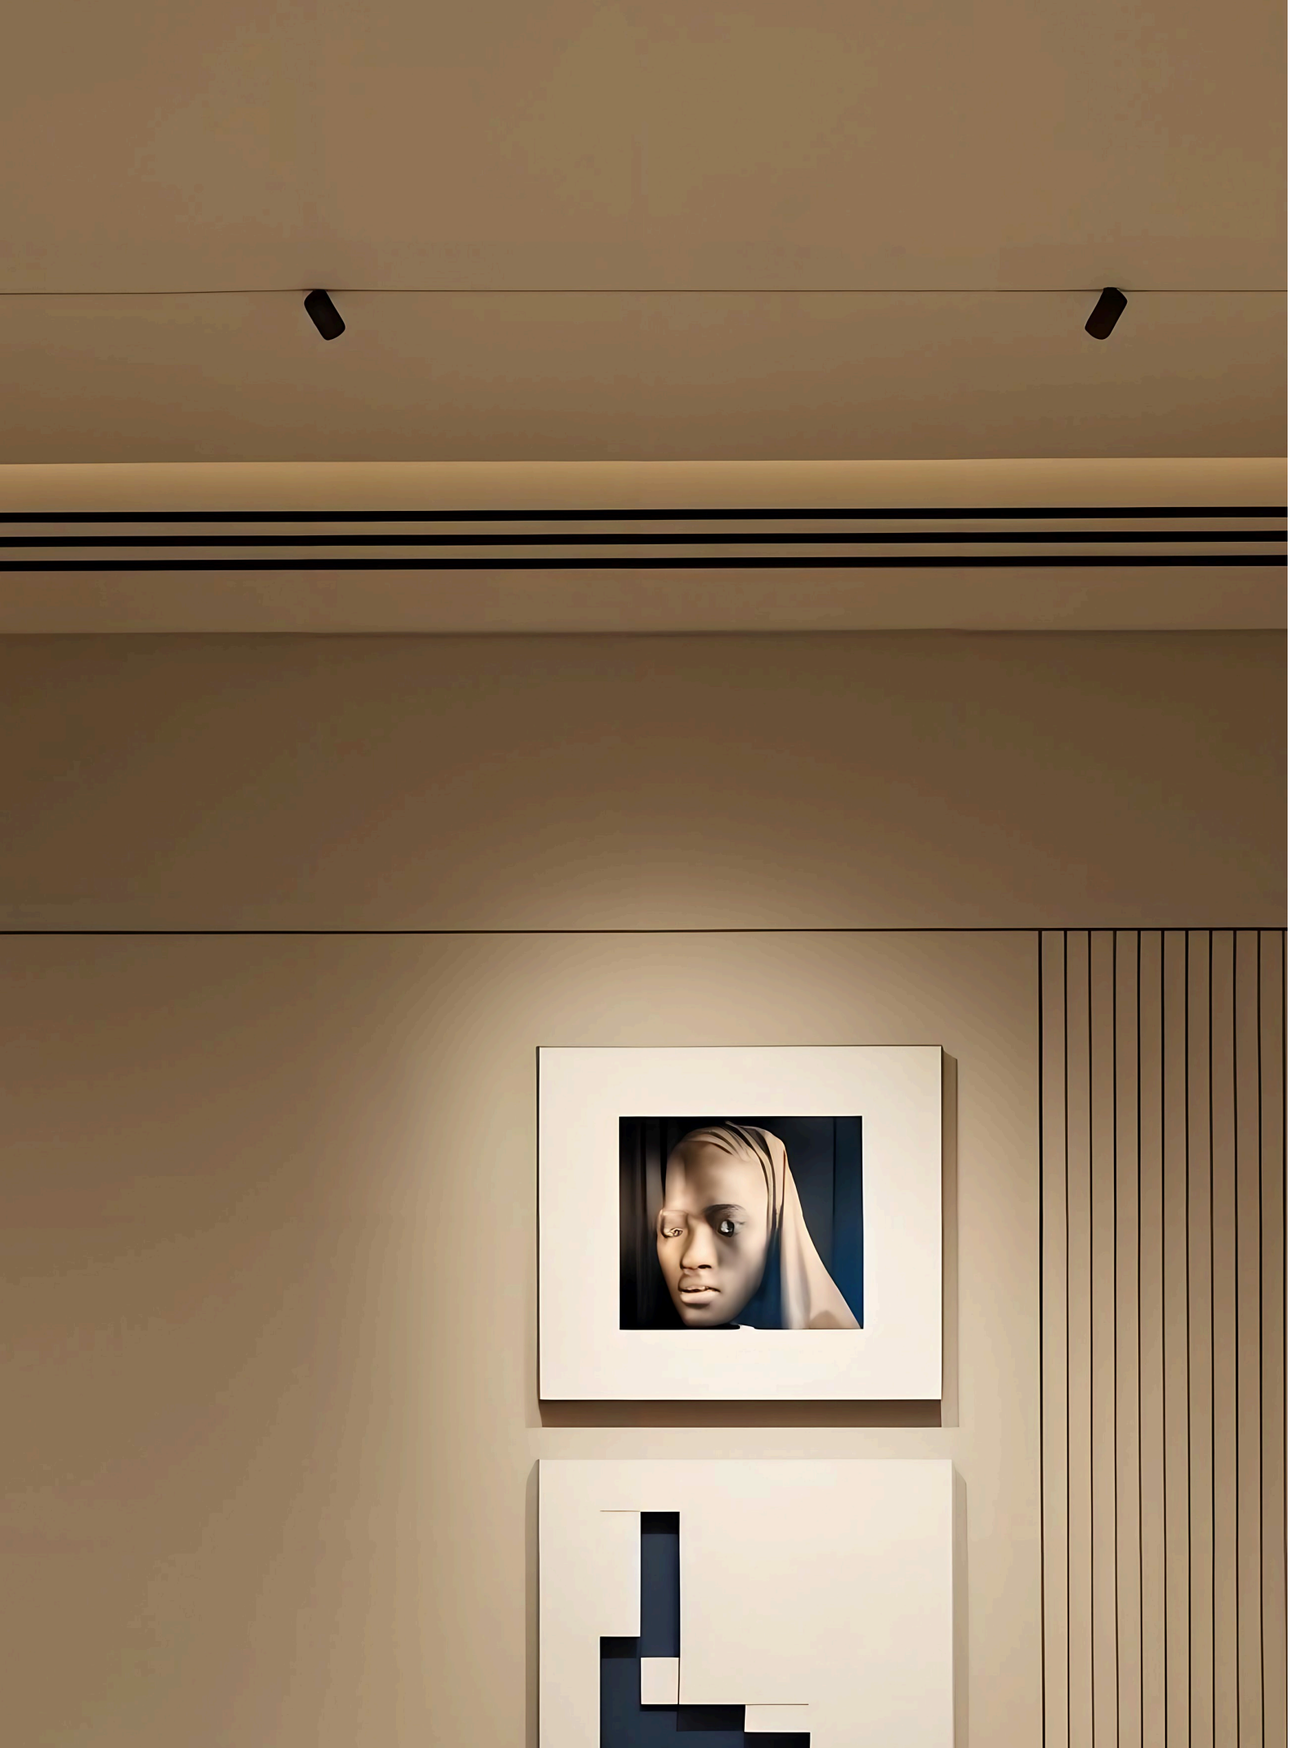

W05 magnetic system

DN-WSA0525DR







Light source:
LED

Luminous flux:
180lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W

Output voltage:
3V

Output current:
600mA

OPTIC:
15°/24°/36°


Mains voltage:
DC24V


Description:
Magnetic rail spotlight

Cutout:
/

DN-WSA0535DR







Light source:
COB

Luminous flux:
500lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
5W

Output voltage:
9V

Output current:
500mA

OPTIC:
15°/24°/36°


Mains voltage:
DC24V


Description:
Magnetic rail spotlight

Cutout:
/

DN-WSA0545DR







Light source:
COB

Luminous flux:
700lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
9W

Output voltage:
18V

Output current:
400mA

OPTIC:
15°/24°/36°


Mains voltage:
DC24V

Description:
Magnetic rail spotlight

Cutout:
/

Colours

BK

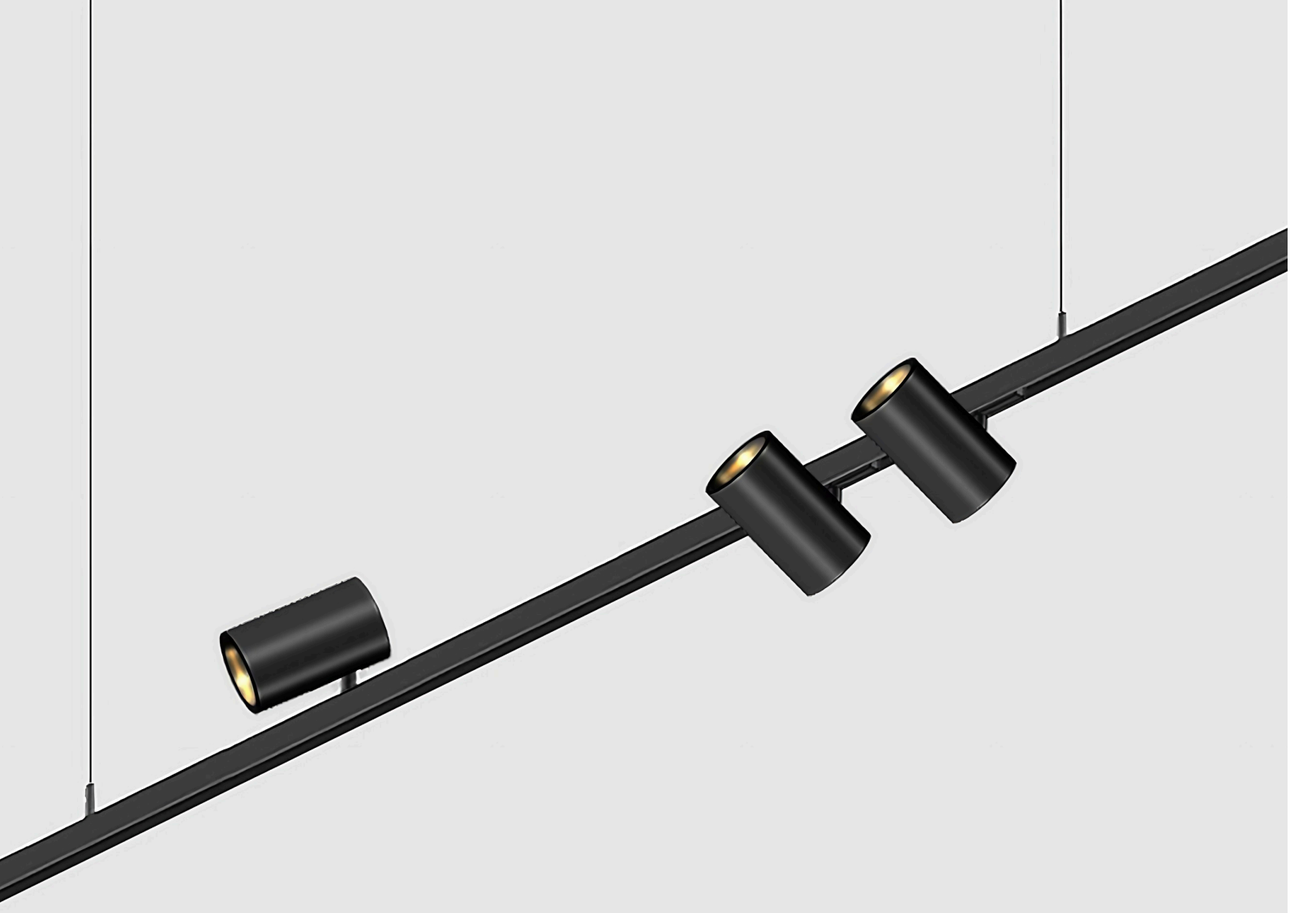


No visible light head

Magnetic lighting system
Freedom of style

W05 magnetic system

DN-WSA0425DR







Light source:
LED

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W

Output voltage:
/

Output current:
/

OPTIC:
15°/24°/36°


Mains voltage:
DC24V


Description:
Vertically swingable 130° spotlight

Cutout:
/

DN-WSA0435DR







Light source:
COB

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
5W

Output voltage:
/

Output current:
/


OPTIC:
15°/24°/36°


Mains voltage:
DC24V

Description:
Vertically swingable 130° spotlight

Cutout:
/

DN-WSA0445DR





Light source:
COB

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
9W

Output voltage:
/

Output current:
/

OPTIC:
15°/24°/36°

Mains voltage:
DC24V

Description:
Vertically swingable 130° spotlight

Cutout:
/


Colours

BK

Mini


magnetic track



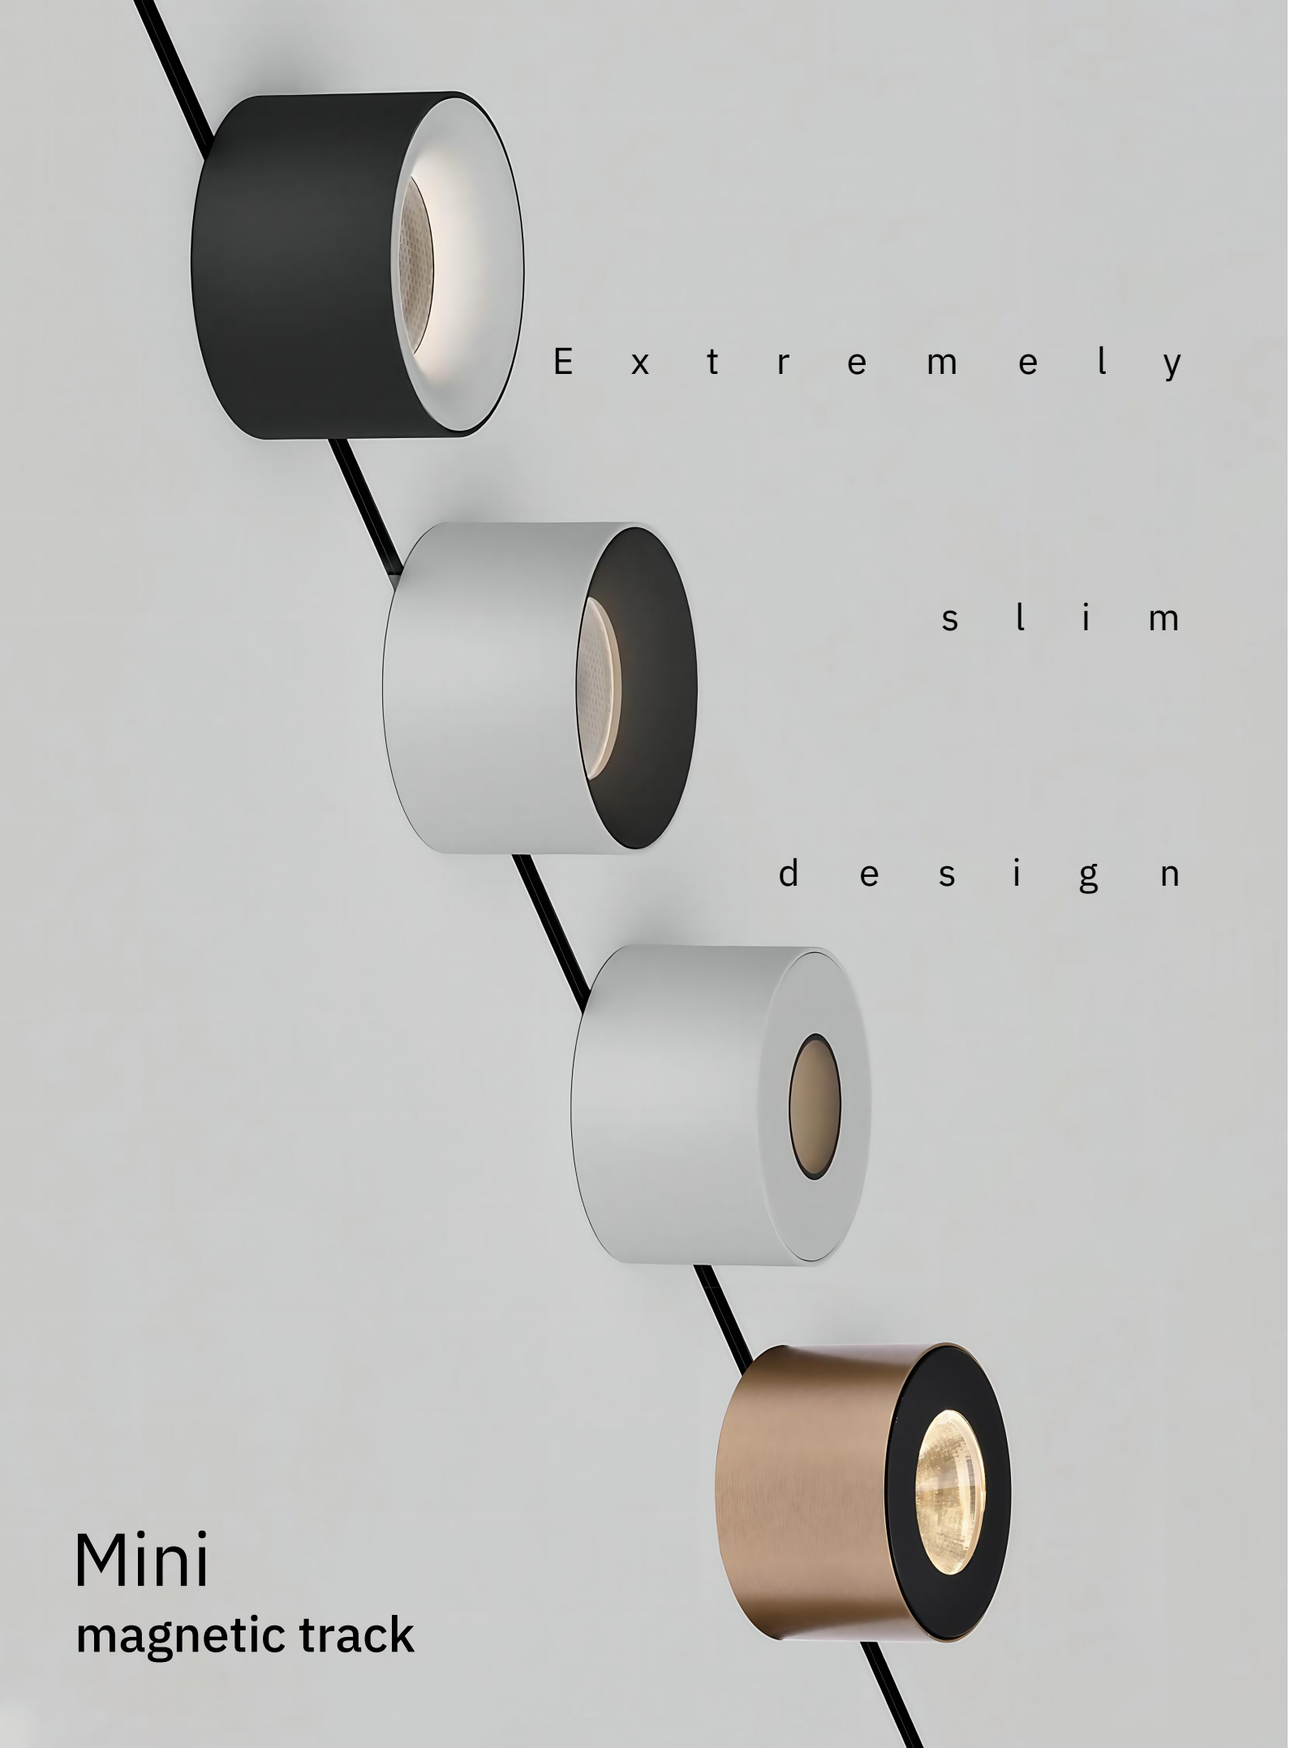

DN-WWA0560NR-A





High CRI · IP20


Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Colors: BK AU WH GY

DN-WWA0560NR-B





High CRI · IP20


Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Colors: BK AU WH GY

DN-WWA0560NR-C





High CRI · IP20


Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Colors: BK AU WH GY

DN-WWA0560NR-D





High CRI · IP20

Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Colors: BK AU WH GY

Mini
magnetic track






W05 magnetic system

DN-WWB0513NR





High CRI

IP20

Light source:
LED

Luminous flux:
700lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
12W

Output voltage:
24V

Output current:
/

OPTIC:
100°


Mains voltage:
DC24V

Description:
Magnetic

Cutout:
/

DN-WWB0514NR





High CRI

IP20

Light source:
LED

Luminous flux:
1100lm

CRI:
Ra>80

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
18W

Output voltage:
24V

Output current:
/

OPTIC:
100°

Mains voltage:
DC24V

Description:
Magnetic


Cutout:
/

Colours


BK WH GY

Mini
magnetic track



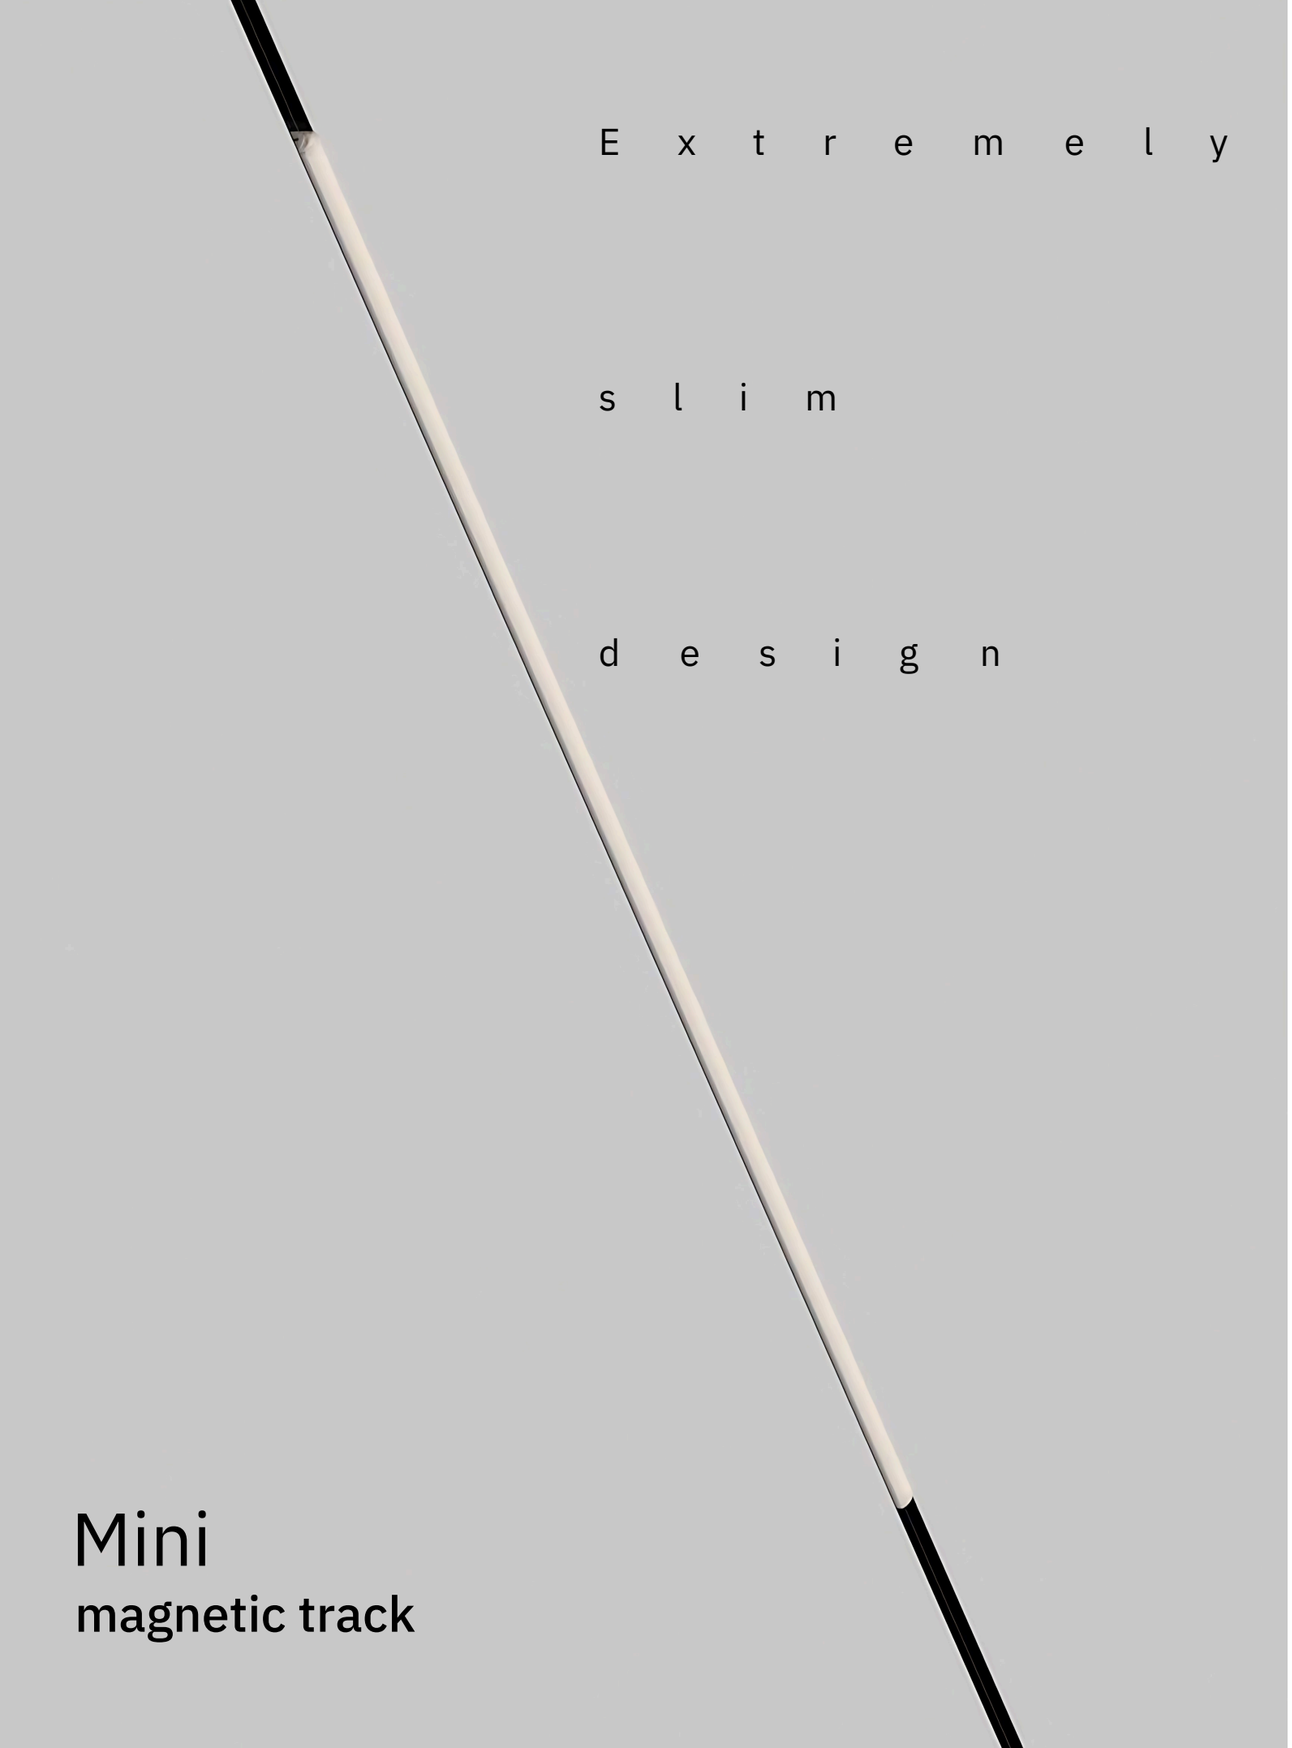

DN-WLB0530NS

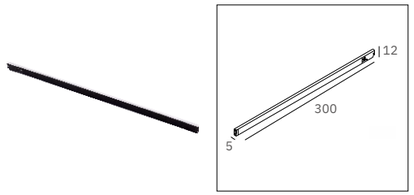


High CRI · IP20

Light source: LED
Luminous flux: 450lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum+PC
Power: 5W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WLB0560NS

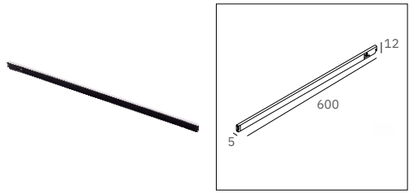


High CRI · IP20

Light source: LED
Luminous flux: 900lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum+PC
Power: 10W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WLB0590NS

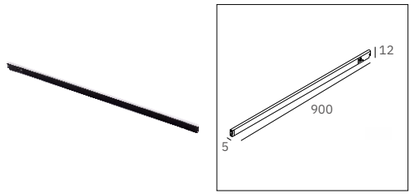

High CRI · IP20

Light source: LED
Luminous flux: 1300lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum+PC
Power: 15W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

Colours

BK


Mini
magnetic track



W05 magnetic system

DN-WPA0540NR






High CRI · IP20

Light source: COB
Luminous flux: 500lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 7W
Output voltage: 36V
Output current: 150mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPA0518NR-A



High CRI · IP20


Light source: LED
Luminous flux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 3W
Output voltage: 3V
Output current: 600mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPA0518NR-B





High CRI · IP20


Light source: LED
Luminous flux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPA0518NR-C





High CRI · IP20

Light source: LED
Luminous flux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 3W
Output voltage: 3V
Output current: 600mA


OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

Colours

BK AU WH GY

DN-WPA0518NR-D





High CRI · IP20


Light source: LED
Luminous flux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 3W
Output voltage: 3V
Output current: 600mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPB6560NR





High CRI · IP20


Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 40°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPB6208NR





High CRI · IP20


Light source: LED
Luminous flux: 180lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 3W
Output voltage: 3V
Output current: 600mA

OPTIC: 15°/24°/36°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WPB7080NR





High CRI · IP20

Light source: COB
Luminous flux: 450lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 9V
Output current: 450mA

OPTIC: 40°
Mains voltage: DC24V
Description: Magnetic
Cutout: /


Colours

BK AU WH GY

W05 magnetic system

DN-WPA0530NR-A





High CRI

IP20

Light source:
COB

Luminous flux:
500lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
5W

Output voltage:
36V

Output current:
120mA

OPTIC:
38°


Mains voltage:
DC24V

Description:
Magnetic

Cutout:
/

DN-WWB0501B





High CRI

IP20

Light source:
LED

Luminous flux:
105lm

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W

Output voltage:
3V

Output current:
600mA

OPTIC:
360°

Mains voltage:
DC24V

Description:
Magnetic glass ball

Cutout:
/

Colours

BK



Mini


magnetic track



W05 magnetic system

DN-WLB1030NS





High CRI · IP20


Light source: LED
Luminous flux: 700lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 8W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WLB1045NS





High CRI · IP20


Light source: LED
Luminous flux: 1100lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 12W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WLB1060NS





High CRI · IP20


Light source: LED
Luminous flux: 1300lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 16W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

DN-WLB1090NS





High CRI · IP20

Light source: LED
Luminous flux: 2300lm
CRI: Ra>80
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 21W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Magnetic
Cutout: /

Colours

BK


Mini
magnetic track



W05 magnetic system

DN-WLA1006NS





High CRI IP20


Light source: LED
Luminous flux: 500lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 5W
Output voltage: 24V
Size: 146*10*H18mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic

DN-WLA1012NS





High CRI IP20


Light source: LED
Luminous flux: 1100lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 10W
Output voltage: 24V
Size: 242*10*H18mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic

DN-WLA1018NS





High CRI IP20


Light source: LED
Luminous flux: 1600lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 15W
Output voltage: 24V
Size: 337*10*H18mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic

DN-WLA1024NS





High CRI IP20

Light source: LED
Luminous flux: 2300lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 20W
Output voltage: 24V
Size: 391*10*H18mm


OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic

Colours

BK

DN-WLA1506DS





High CRI IP20


Light source: LED
Luminous flux: 221lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 6W
Output voltage: 24V
Size: 158*15*H85mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic spot light

DN-WLA1512DS





High CRI IP20


Light source: LED
Luminous flux: 430lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 12W
Output voltage: 24V
Size: 272*15*H85mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic spot light

DN-WSA1006DS






High CRI IP20


Light source: LED
Luminous flux: 221lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 6W
Output voltage: 24V
Size: 138*10.5*H64mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic spot light

DN-WLA1512DS





High CRI IP20

Light source: LED
Luminous flux: 430lm
CRI: Ra>90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminium
Power: 12W
Output voltage: 24V
Size: 235*10.5*H64mm

OPTIC: 30°
Mains voltage: DC24V
Description: Magnetic spot light

Colours

BK

Mini

magnetic track

E x t r e m e l y

s l i m

d e s i g n

Mini
magnetic track

DN-WYB0501NS



High CRI · IP20

1000

Light source: LED
Luminous flux: /
CRI: Ra>80
CCT: 3000K

Material: Silicone
Power: 8W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Light Strip
Cutout: /

DN-WYB0502NS



High CRI · IP20


2000

Light source: LED
Luminous flux: /
CRI: Ra>80
CCT: 3000K

Material: Silicone
Power: 16W
Output voltage: 24V
Output current: /

OPTIC: 100°
Mains voltage: DC24V
Description: Light Strip
Cutout: /



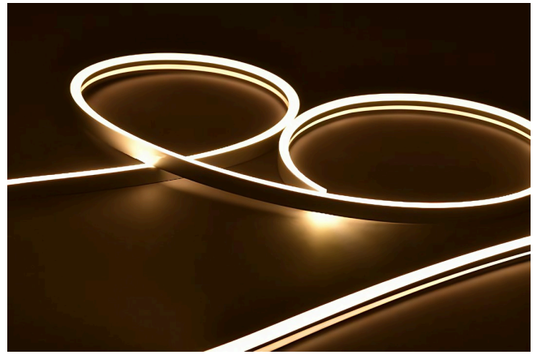

Colours


WH



W05 magnetic system

DN-WSA0425DR







Light source:
LED

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W

Size:
Φ25x56mm


OPTIC:
24°/36°

Mains voltage:
DC24V

Description:
Vertically swingable 130° spotlight

DN-WSA0435DR







Light source:
COB

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W


OPTIC:
10°--55°


Mains voltage:
DC24V

Description:
Vertically swingable 130° spotlight

DN-WSA0445DR







Light source:
COB

Luminous flux:
/

CRI:
Ra>90

CCT:
2700K/3000K/4000K/5000K

Material:
Aluminium

Power:
3W

Size:
Φ25x82mm

OPTIC:
18°/--35°

Mains voltage:
DC24V


Description:
Vertically swingable 130° spotlight



Focus adjustment

Colours


BK

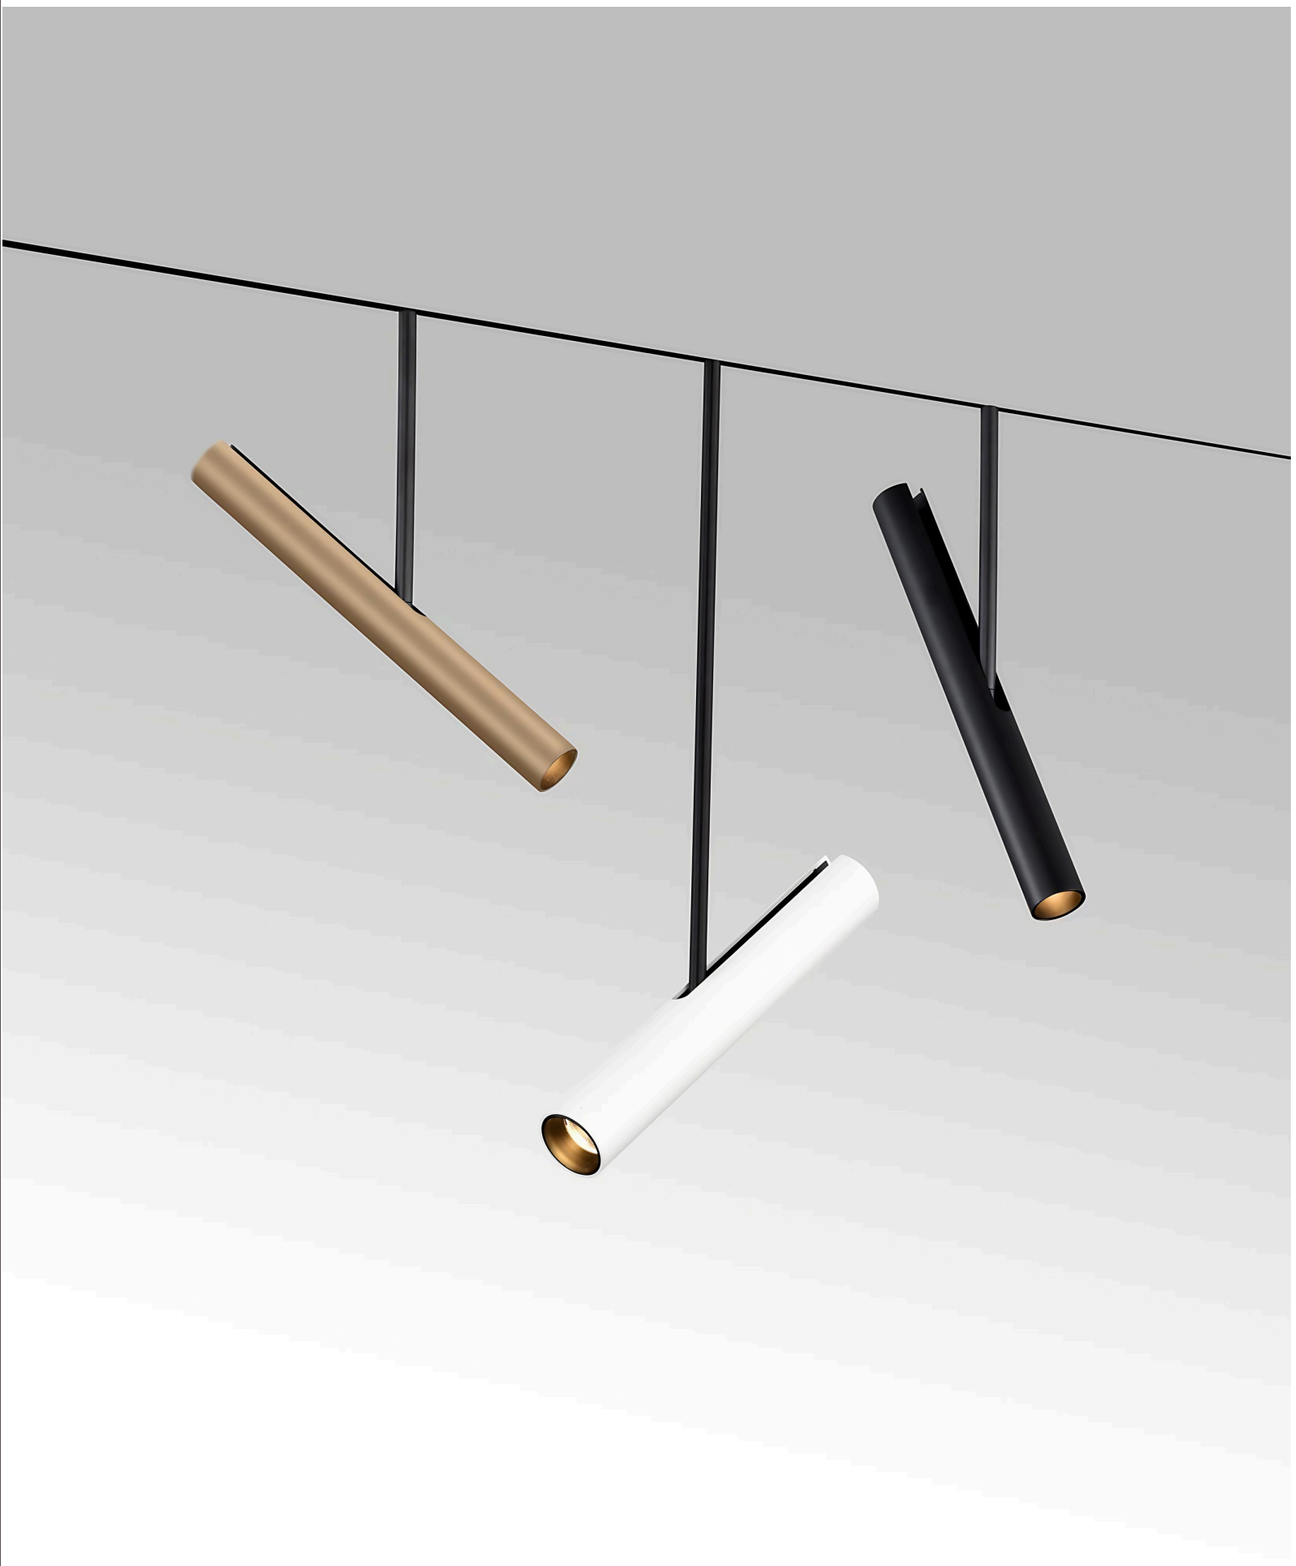

W05 magnetic system

DN-WSA2601DR-A





High CRI · IP20


Light source: OSRAM
Luminous flux: 500Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 10W
Description: Magnetic rail spotlight
Size: Φ25x220mm

OPTIC: 24°/32°
Mains voltage: DC24V

DN-WSA2602DR-A





High CRI · IP20


Light source: LED
Luminous flux: 750Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 12W
Description: Magnetic rail spotlight
Size: Φ35x220mm

OPTIC: 24°/36°
Mains voltage: DC24V

DN-WSA2601DR-B





High CRI · IP20


Light source: LED
Luminous flux: 500Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 10W
Description: Magnetic rail spotlight
Size: Φ25x220mm

OPTIC: 24°/32°
Mains voltage: DC24V

DN-WSA2602DR-B





High CRI · IP20

Light source: LED
Luminous flux: 750Lm
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 12W
Description: Magnetic rail spotlight
Size: Φ35x220mm

OPTIC: 24°/36°
Mains voltage: DC24V


black · White · Brass · Brushed silver grey





Extremely
slim
design

W05 magnetic system

DN-WSA0560DR







Light source:
Bridgelux

Luminous flux:
380Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
7W

Description:
Magnetic rail spotlight


Size:
Φ60x42 mm


OPTIC:
15°/24°/36°

Mains voltage:
DC24V

DN-WSA0580DR







Light source:
Bridgelux

Luminous flux:
600Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
12W

Description:
Magnetic rail spotlight

Size:
Φ80x56 mm

OPTIC:
15°/24°/36°


Mains voltage:
DC24V



W05 magnetic system

DN-WWA0535NR-A







Light source:
OSRAM

Luminous flux:
375Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
5W

Description:
Magnetic rail spotlight


Size:
Φ35

OPTIC:
24°/36°

Mains voltage:
DC24V

DN-WWA0545NR-A







Light source:
OSRAM

Luminous flux:
500Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
9W

Description:
Magnetic rail spotlight


Size:
Φ45mm


OPTIC:
24°/36°

Mains voltage:
DC24V

DN-WSA0535DR-B







Light source:
Bridgelux

Luminous flux:
375Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
5W

Description:
Magnetic rail spotlight


Size:
Φ35x58 mm


OPTIC:
15°/24°/36°

Mains voltage:
DC24V

DN-WSA0545DR-B







Light source:
Bridgelux

Luminous flux:
500Lm

CRI:
Ra>90

CT:
2700K/3000K/4000K

Material:
Aluminium

Power:
9W


Description:
Magnetic rail spotlight

Size:
Φ45x58 mm

OPTIC:
15°/24°/36°

Mains voltage:
DC24V

black White Brass Brushed silver grey

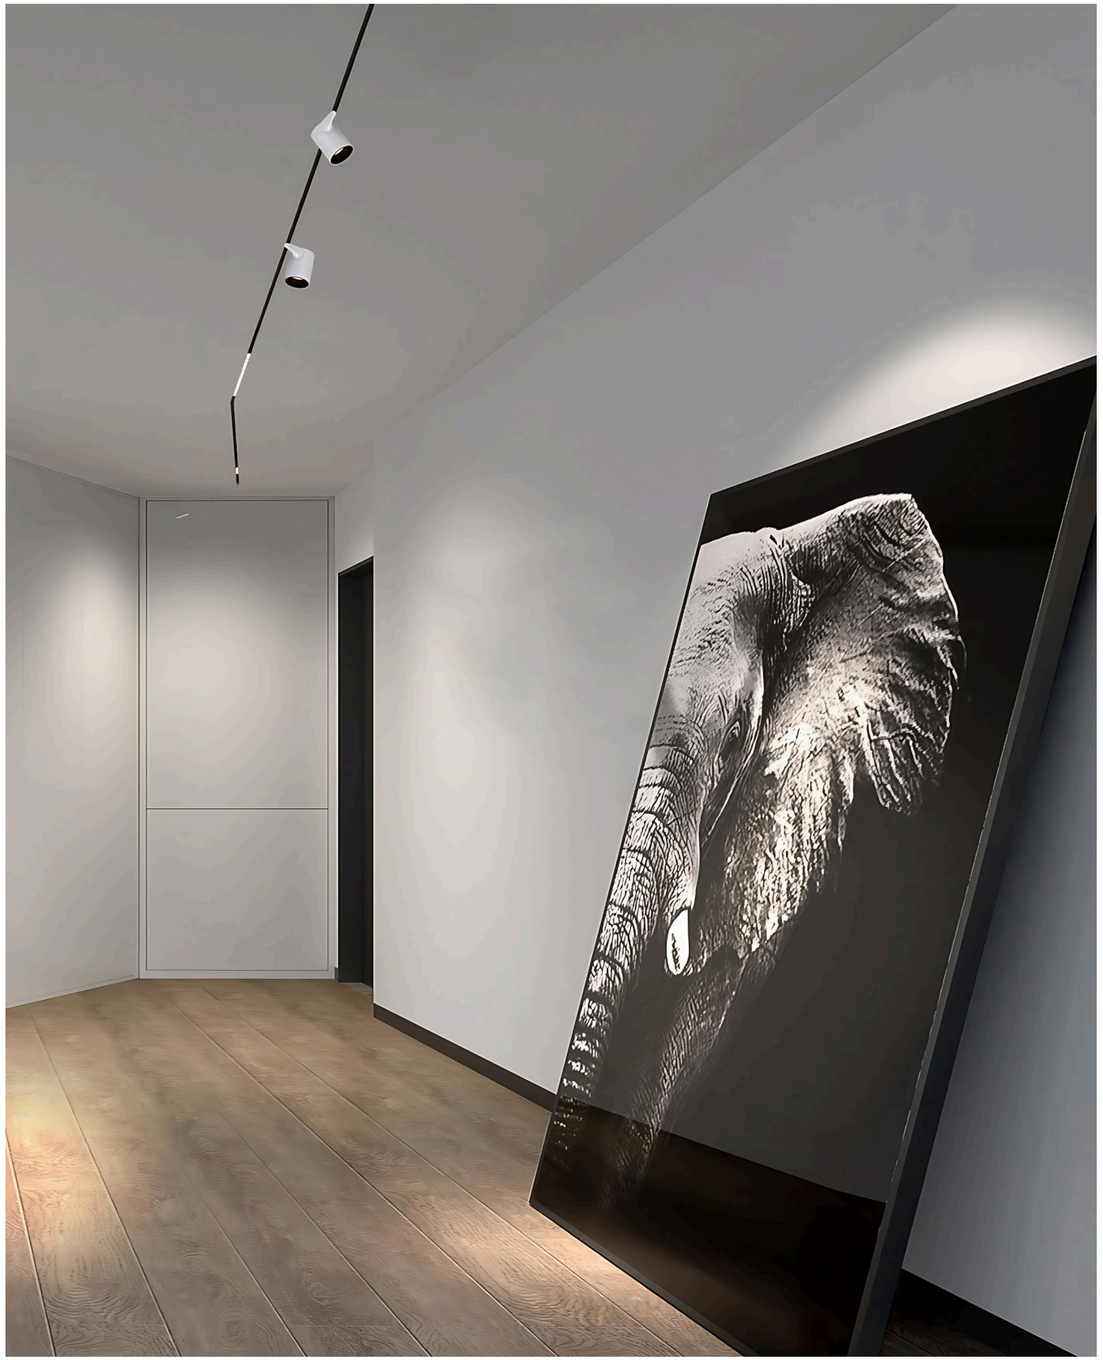






DN-WLA3006NS






High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K
Mains voltage: DC24V
Size: 160x30x45 mm
Power: 6W
Material: Aluminium
OPTIC: 45°
CRI: Ra>90
Description: grille light

DN-WLA3012NS






High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K/5000K
Mains voltage: DC24V
Size: 317x30x45 mm
Power: 12W
Material: Aluminium
OPTIC: 45°
CRI: Ra>90
Description: grille light

DN-WLA3018NS






High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K/5000K
Mains voltage: DC24V
Size: 505x30x45mm
Power: 18W
Material: Aluminium
Beam angle: 45°
CRI: Ra>90
Description: grille light

DN-WLA3024NS





High CRI · IP20


LED brand: OSRAM
CCT: 2700K/3000K/4000K/5000K
Mains voltage: DC24V
Size: 663x30x45mm
Power: 24W
Material: Aluminium
Beam angle: 45°
CRI: Ra>90
Description: grille light

black · White



DN-WLA3012NB





High CRI · IP20


LED brand: OSRAM
CCT: 2700K/3000K/4000K
Mains voltage: DC24V

Size: 342x30x45 mm
Power: 12W
Material: Aluminium

OPTIC: 45°
CRI: Ra>90
Description: grille light

DN-WLA3024NB





High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K
Mains voltage: DC24V

Size: 668x30x45 mm
Power: 24W
Material: Aluminium

OPTIC: 45°
CRI: Ra>90
Description: grille light

DN-WRA3072NR





High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K
Mains voltage: DC24V

Size: Φ650mm
Power: 20W
Material: Aluminium

Beam angle: 45°
CRI: Ra>90
Description: grille light

DN-WRA3096NR






High CRI · IP20

LED brand: OSRAM
CCT: 2700K/3000K/4000K
Mains voltage: DC24V

Size: Φ850mm
Power: 30W
Material: Aluminium


Beam angle: 45°
CRI: Ra>90
Description: grille light

● black ○ White

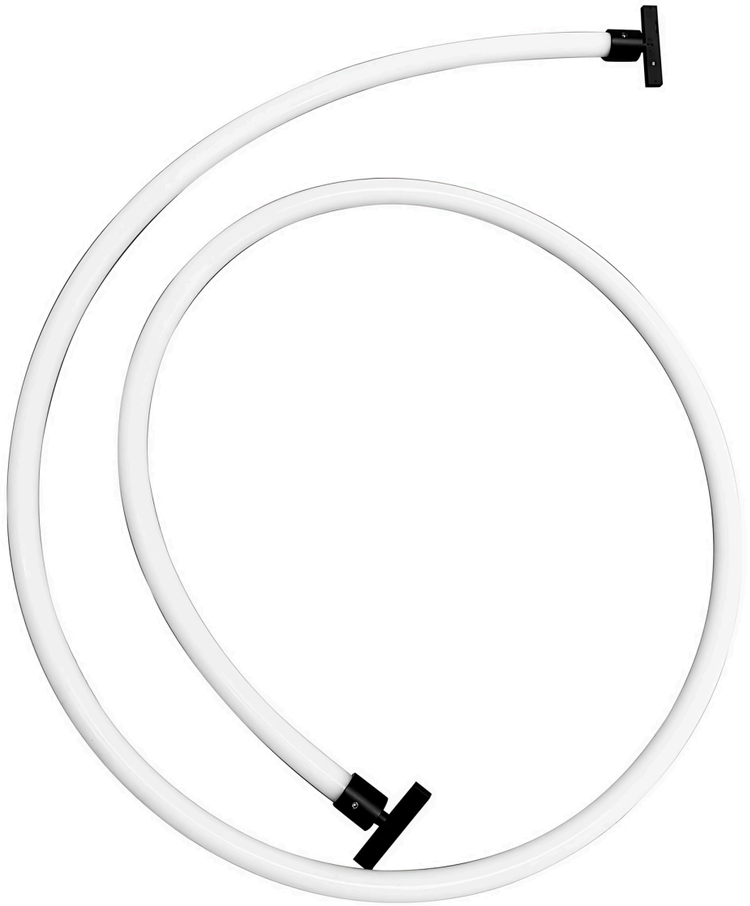

DN-WLS0516-1M







LED brand:
OSRAM

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
Φ16x1000 mm

Power:
16W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>90

Description:
Flexible light strip

DN-WLS0516-2M







LED brand:
OSRAM

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
Φ16x2000 mm

Power:
32W


Material:
Aluminium

OPTIC:
45°

CRI:
Ra>90


Description:
Flexible light strip

black White

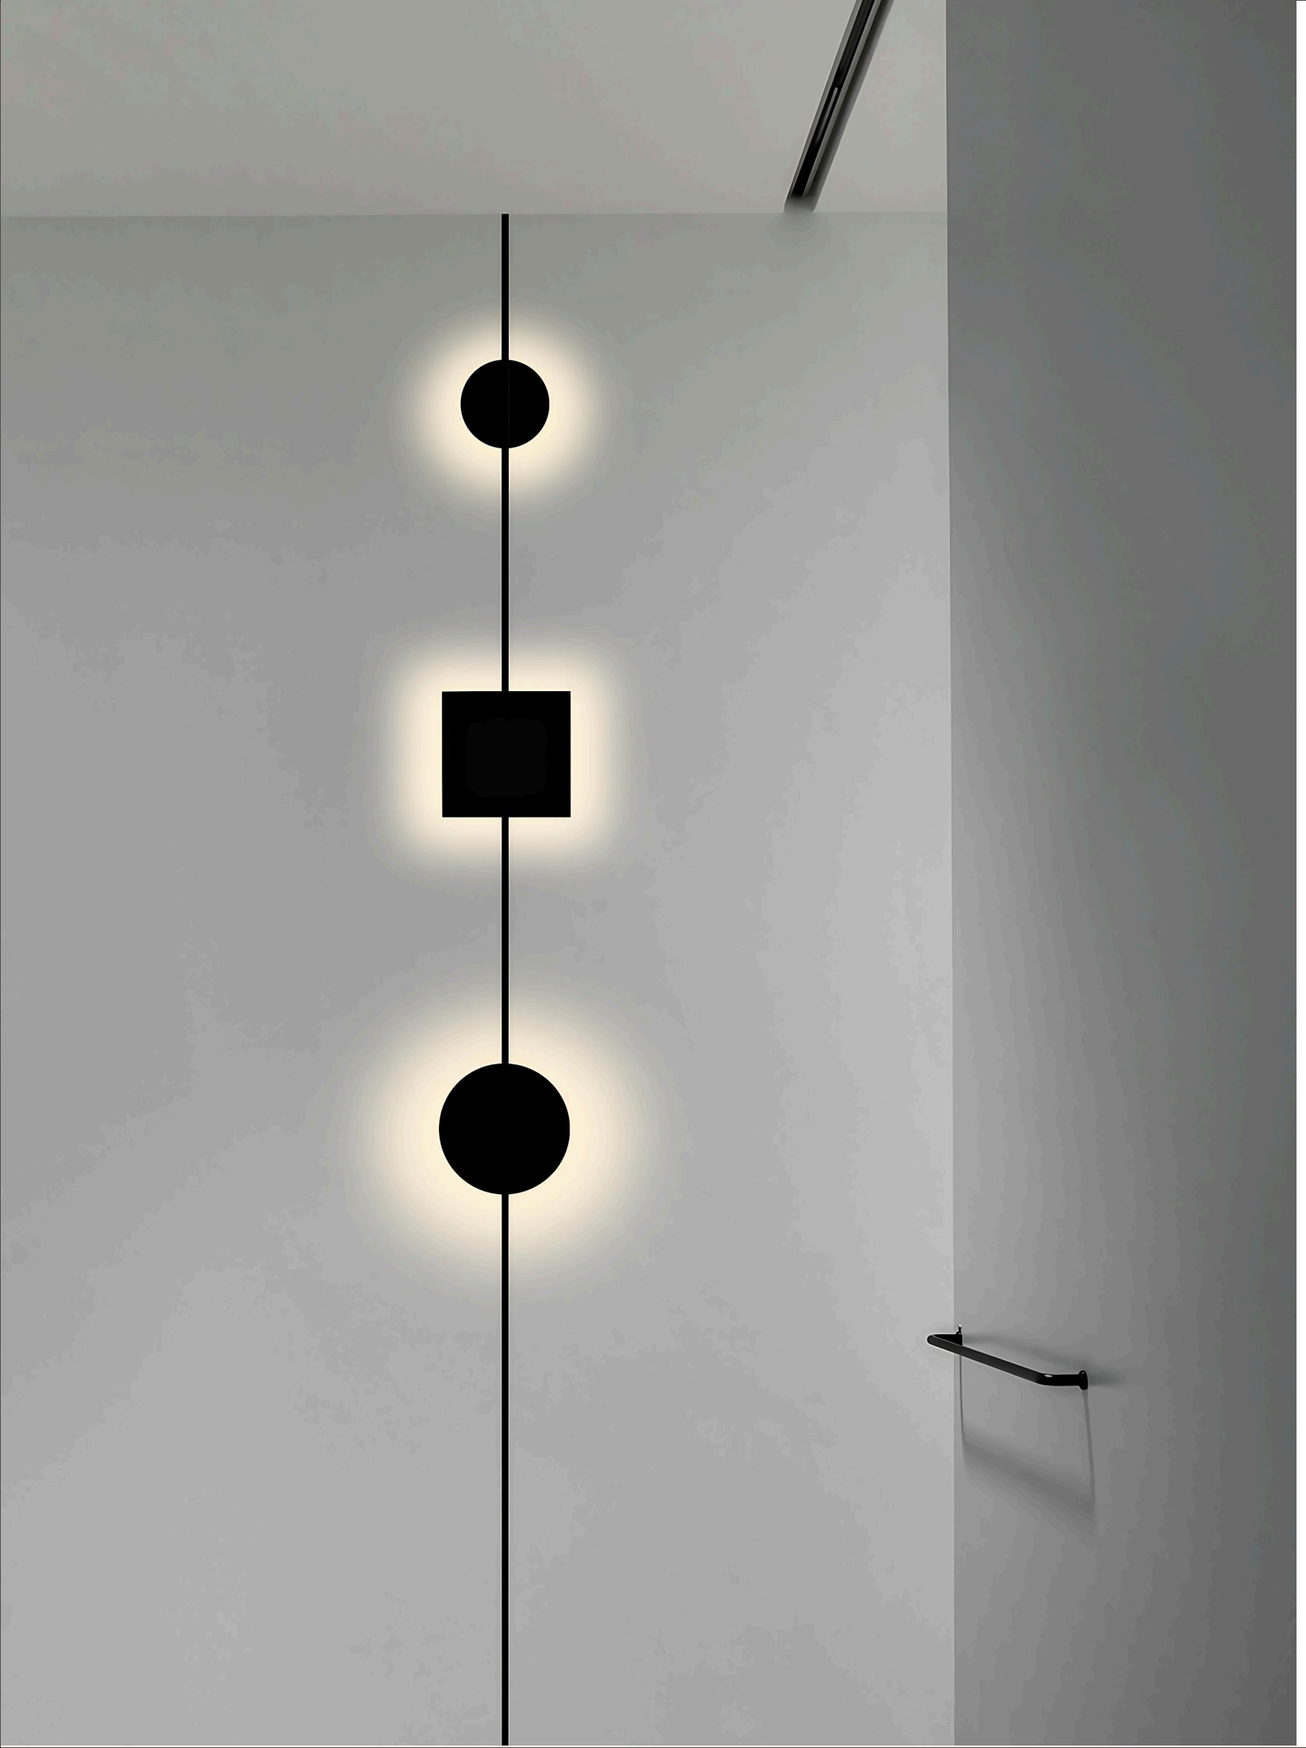

DN-WWB2615NR





High CRI | IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
150 mm

Power:
5W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>80

Description:
wall lamp

DN-WWB2612NR





High CRI | IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
120 mm

Power:
5W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>80

Description:
wall lamp

DN-WWB2609NR





High CRI | IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
90mm

Power:
5W


Material:
Aluminium

Beam angle:
100°

CRI:
Ra>80


Description:
grille light

black | White | Brass | Brushed silver grey

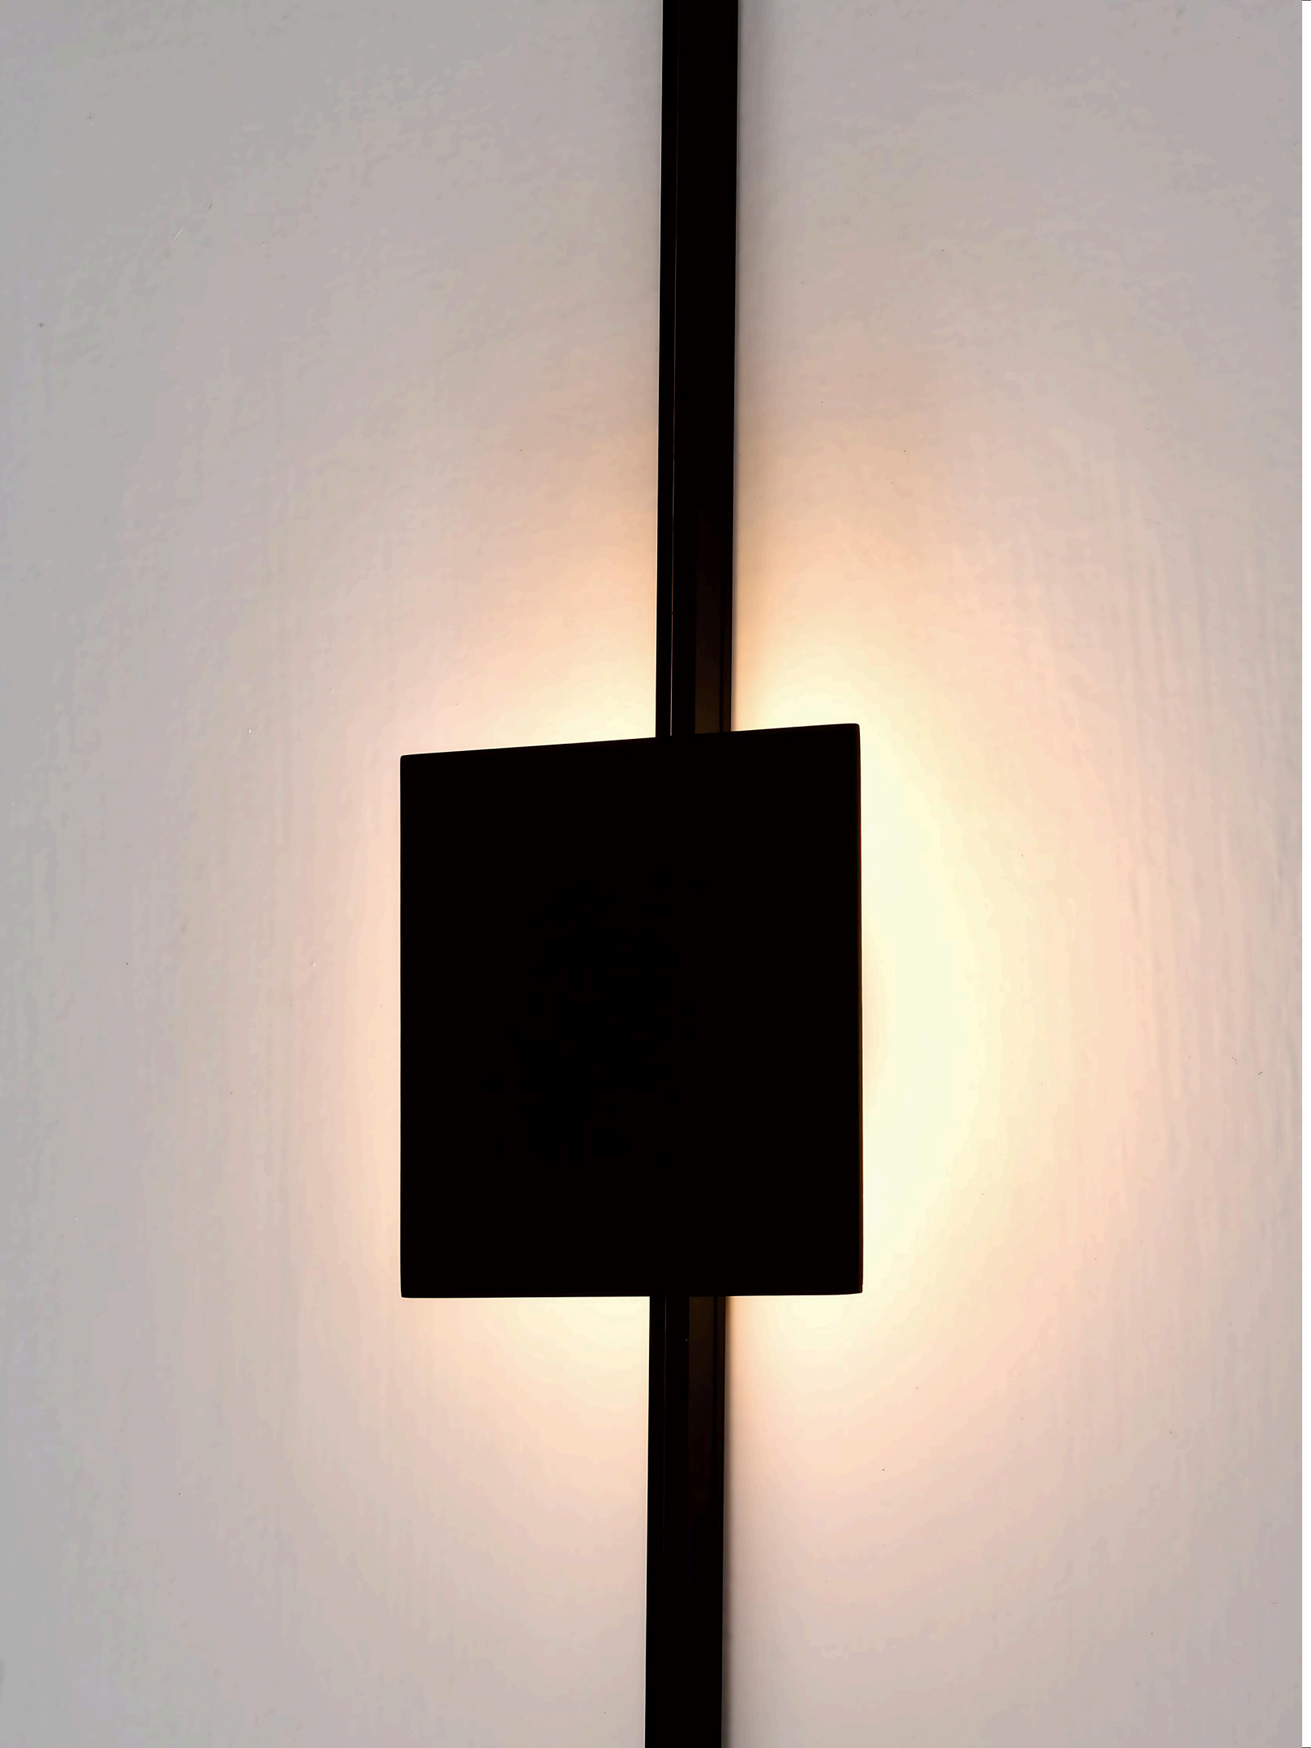

DN-WWB2615NS





High CRI · IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
150 x150mm

Power:
5W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>80

Description:
wall lamp

DN-WWB2612NS





High CRI · IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
120x120 mm

Power:
5W

Material:
Aluminium


OPTIC:
100°

CRI:
Ra>80

Description:
wall lamp

DN-WWB2609NS





High CRI · IP20

LED

CCT:
3000K/4000K

Mains voltage:
DC24V

Size:
90mm

Power:
5W

Material:
Aluminium

Beam angle:
100°


CRI:
Ra>80


Description:
grille light

black · White · Brass · Brushed silver grey



DN-WLA0514NS-A







LED

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
145x5x10.5mm

Power:
3W


Material:
Aluminium


OPTIC:
50°

CRI:
Ra>90

Description:
grille light

DN-WLA0514NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
145x5x10.5 mm

Power:
3W

Material:
Aluminium


OPTIC:
40°

CRI:
Ra>90

Description:
grille light

DN-WLA0528NS-A







LED

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
245x5x10.5 mm

Power:
6W


Material:
Aluminium


OPTIC:
50°

CRI:
Ra>90

Description:
grille light

DN-WLA0528NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
245x5x10.5mm

Power:
6W


Material:
Aluminium


OPTIC:
40°

CRI:
Ra>90

Description:
grille light

DN-WLA0542NS-A







LED

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
345x5x10.5mm

Power:
9W


Material:
Aluminium


Beam angle:
50°

CRI:
Ra>90

Description:
grille light

DN-WLA0542NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
345x5x10.5mm

Power:
9W


Material:
Aluminium


Beam angle:
40°

CRI:
Ra>90

Description:
grille light

DN-WLA0556NS-A







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
445x5x10.5mm

Power:
12W

Material:
Aluminium


Beam angle:
50°


CRI:
Ra>90

Description:
grille light

black

DN-WLA0556NS-B







LED brand:
OSRAM

CCT:
2700K/3000K/4000K

Mains voltage:
DC24V

Size:
445x5x10.5mm

Power:
12W

Material:
Aluminium

Beam angle:
40°

CRI:
Ra>90

Description:
grille light


black



W05 magnetic system

DN-WPB1101B





High CRI · IP20


Light source: OSRAM
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 3W
Description: Magnetic rail spotlight

OPTIC: 200°
Mains voltage: DC24V
Size: Φ60mm

DN-WPB1102B





High CRI · IP20


Light source: LED
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 3W
Description: Magnetic rail spotlight

OPTIC: 200°
Mains voltage: DC24V
Size: Φ80mm

DN-WPB1103B





High CRI · IP20


Light source: LED
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 5W
Description: Magnetic rail spotlight

OPTIC: 200°
Mains voltage: DC24V
Size: Φ100mm

DN-WPB1104B





High CRI · IP20

Light source: LED
CRI: Ra>90
CT: 2700K/3000K/4000K

Material: Aluminium
Power: 5W
Description: Magnetic rail spotlight

OPTIC: 200°
Mains voltage: DC24V
Size: Φ120mm

White

DIANOCHE

www.dianoche.it
service@dianoche.it