


Type	pendant lamp with anvil and plug driver
Materials and colours	brass structure with black details, steel suspension cable, dimmer/plug driver black, blue wire, black iron anvil
Light source	**Light source 2700K** Ø 50 cm: LED module 18x0,7W 24V / rated output 12,6W / energy class D / lumen 2430 / K 2700 / CRI 91 Ø 85 cm: LED module 36x0,7W 24V / rated output 25,2W / energy class D / lumen 4860 / K 2700 / CRI 91 **EPREL** registered light source, click here **Light source 2400K** Ø 50 cm: LED module 18x0,7W 24V / rated output 12,6W / energy class E / lumen 2160 / K 2400 / CRI 84 Ø 85 cm: LED module 36x0,7W 24V / rated output 25,2W / energy class E / lumen 4320 / K 2400 / CRI 84 **EPREL** registered light source, click here
Power supply	110-240V* plug driver with cord dimmer (memory last step) * The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

Dimensions

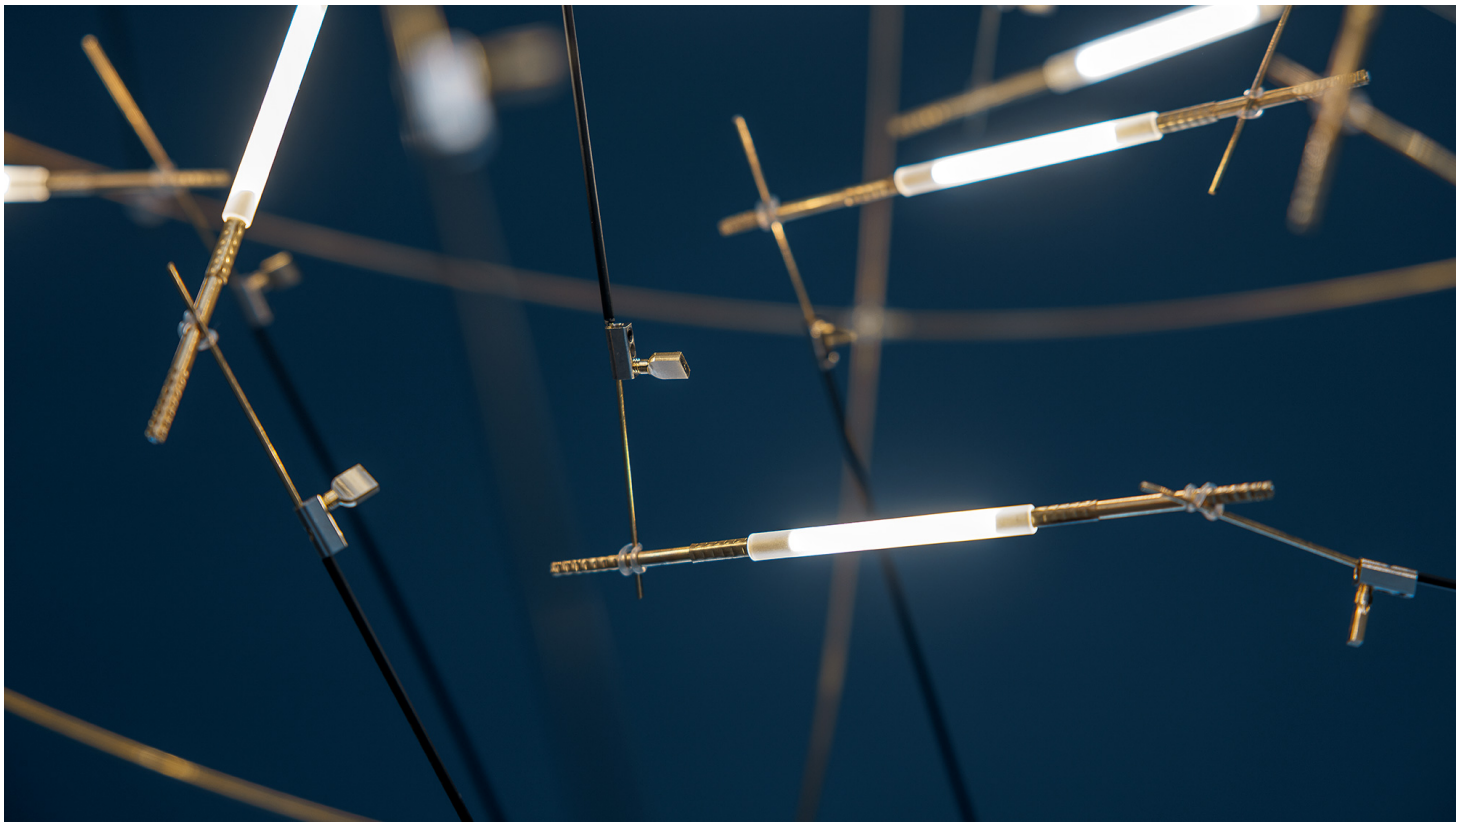

Ø 50 / 85 cm
adjustable hanging wires cable from max 300 cm,
lamp to dimmer 30 cm, from dimmer to plug driver 300 cm

Order code

POTA5F	Ø 50 cm / 2700K
POTA8F	Ø 85 cm / 2700K

POTA5F24	Ø 50 cm / 2400K
POTA8F24	Ø 80 cm / 2400K

CATELLANI & SMITH SRL
VIA CIMITERO 1/A, 24020 VILLA DI SERIO, BG
CAP. SOC. € 500.000 I.V. CF, P.IVA E REG. IMPR. BG IT02656220163, ISCRIZ.
REGISTRO PILE/ACCUMULATORI N. IT25020P00010228, RIPRODUZIONE RISERVATA
© CATELLANI & SMITH

Catellani&Smith