Linear

5 mm Micro Track System TR0268

Linear track luminaire




Linear track luminaire. 8 or 15 W. 70° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **8 W, 15 W**	Voltage **48 V DC**	Luminous flux **600 lm, 1200 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **70°**
IP rating **IP20**	Certifications **CE**	Mounting **Magnetic track**
Finishes **Black**		

Dimensions

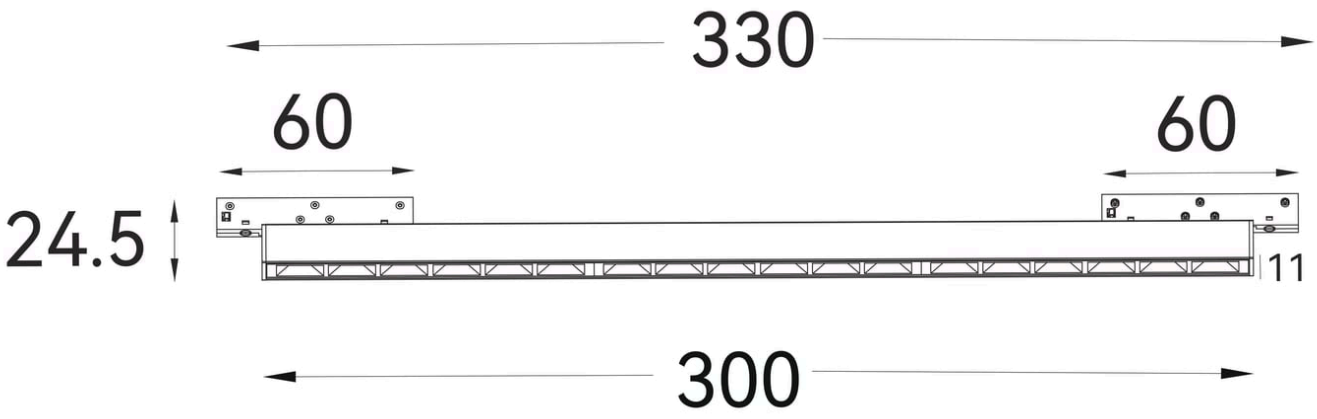


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0268	8 W	48 V DC	600 lm	97 CRI	L330 x H24.5 mm	70°
TR0272	15 W	48 V DC	1200 lm	97 CRI	L630 x H24.5 mm	70°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0272, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0272, 15 W, 70° beam

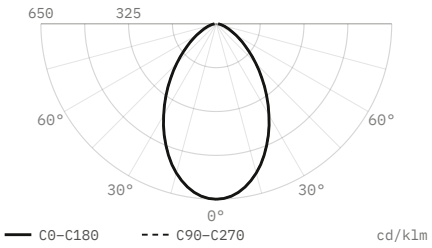

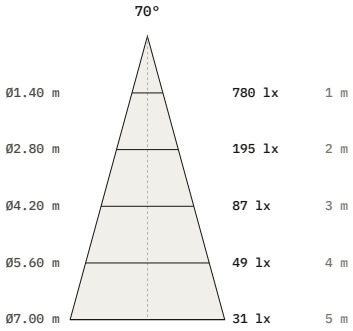

Luminous flux	**1,200 lm**
Efficacy	**80 lm/W**
Peak intensity	**780 cd, 650 cd/klm**
Beam angle (50%)	**70°**
Field angle (10%)	**127.6°**
Cut-off angle (2.5%)	**80.5°**
Flux 0–30° / 30–60° / 60–90°	**43 / 46.9 / 10.1 %**
Size	**630 × 0 × 24.5 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.