Linear

5 mm Micro Track System TR0269

Linear track luminaire




Linear track luminaire. 8 or 15 W. 100° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power 8 W, 15 W	Voltage 48 V DC	Luminous flux 600 lm, 1200 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 100°
IP rating IP20	Certifications CE	Mounting Magnetic track
Finishes Black		

Dimensions

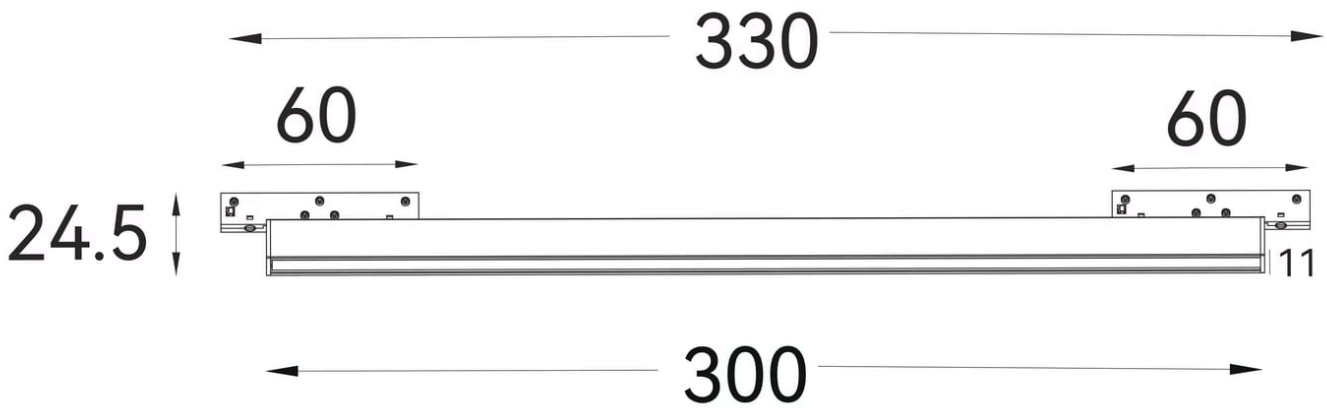


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0269	8 W	48 V DC	600 lm	97 CRI	L330 x H24.5 mm	100°
TR0273	15 W	48 V DC	1200 lm	97 CRI	L630 x H24.5 mm	100°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0273, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0273, 15 W, 100° beam

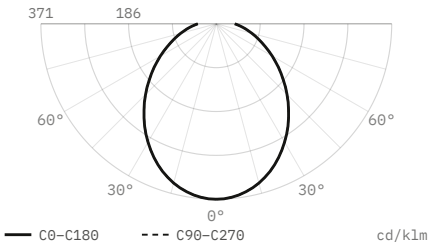

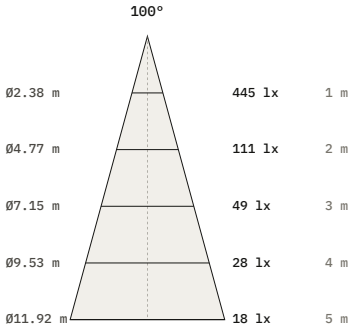

Luminous flux	1,200 lm
Efficacy	80 lm/W
Peak intensity	445 cd, 371 cd/klm
Beam angle (50%)	100°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	27.6 / 47.2 / 25.2 %
Size	630 × 0 × 24.5 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.