Linear

5 mm Micro Track System TR0278

Linear track luminaire




Linear track luminaire. 6 or 12 W. 40° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power 6 W, 12 W	Voltage 48 V DC	Luminous flux 500 lm, 960 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 40°
IP rating IP20	Certifications CE	Mounting Magnetic track
Finishes Black		

Dimensions

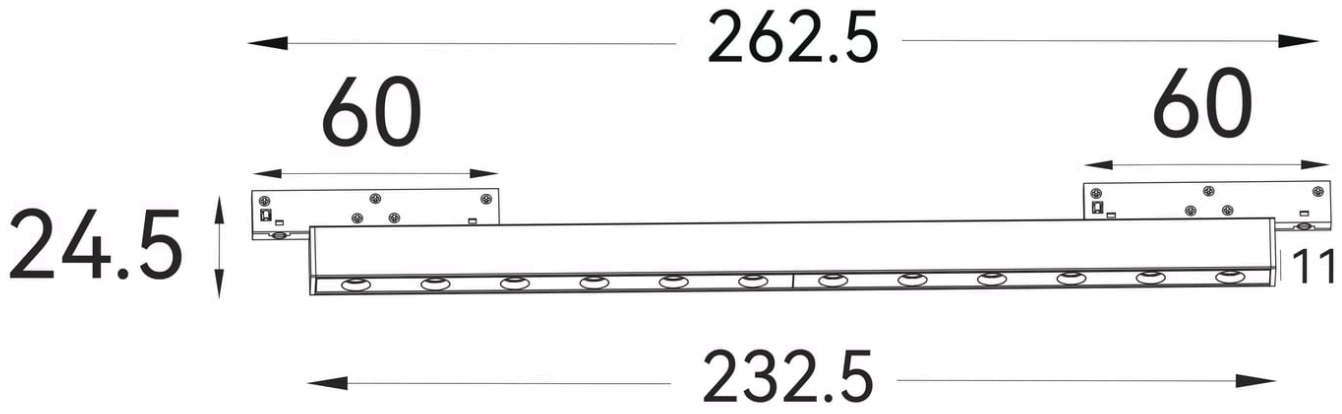


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
TR0278	6 W	48 V DC	500 lm	97 CRI	L262.5 x H24.5 mm	40°
TR0279	12 W	48 V DC	960 lm	97 CRI	L495 x H24.5 mm	40°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for TR0279, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

TR0279, 12 W, 40° beam

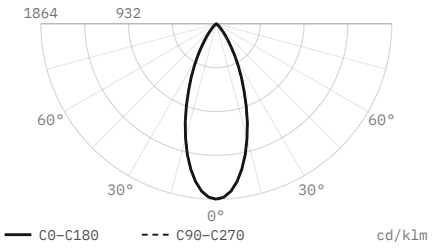

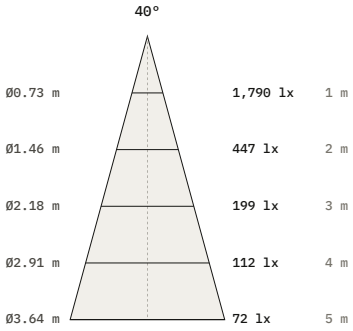

Luminous flux	960 lm
Efficacy	80 lm/W
Peak intensity	1,790 cd, 1,864 cd/klm
Beam angle (50%)	40°
Field angle (10%)	72.9°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	79.9 / 19.9 / 0.2 %
Size	495 × 0 × 24.5 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.