Downlights

Alfa DL0755

Recessed spotlight




Recessed spotlight. 7 W. Three beam angles, 24° to 60°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø76 mm
- LED source: Citizen

Power **7 W**	Voltage **max 19 V**	Luminous flux **580 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°, 60°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

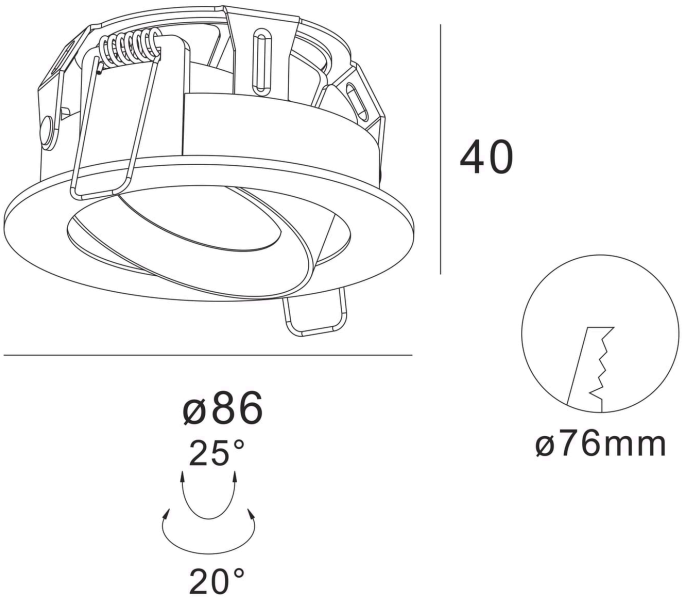


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0755	7 W	max 19 V	580 lm	97 CRI	Ø86 x H40 mm	Ø76 mm	24° 36° 60°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0755, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0755, 7 W, 24° beam

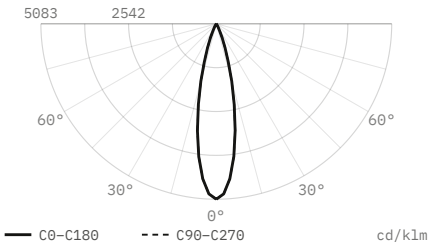


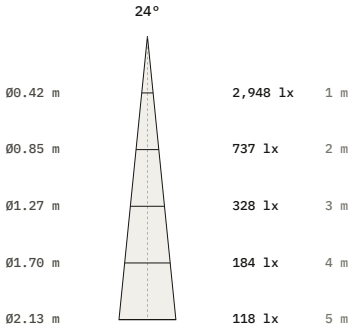

Luminous flux	580 lm
Efficacy	83 lm/W
Peak intensity	2,948 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø86 × 40 mm
Data	Calculated from catalogue data


DL0755, 7 W, 36° beam

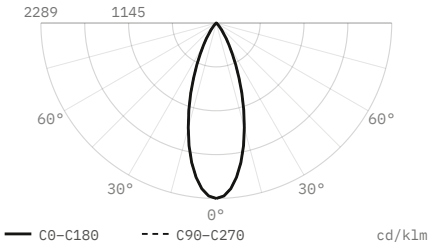


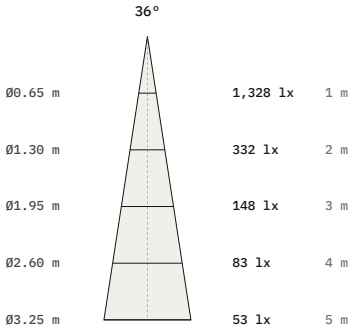

Luminous flux	580 lm
Efficacy	83 lm/W
Peak intensity	1,328 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø86 × 40 mm
Data	Calculated from catalogue data

DL0755, 7 W, 60° beam

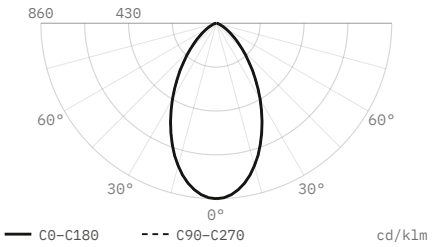

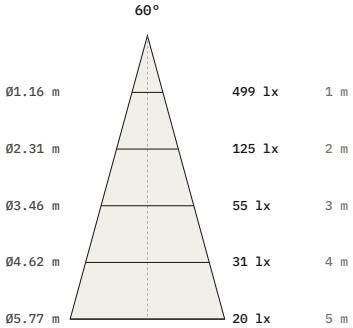

Luminous flux	580 lm
Efficacy	83 lm/W
Peak intensity	499 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø86 × 40 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.