
Linear

Bet CH0217

Linear luminaire

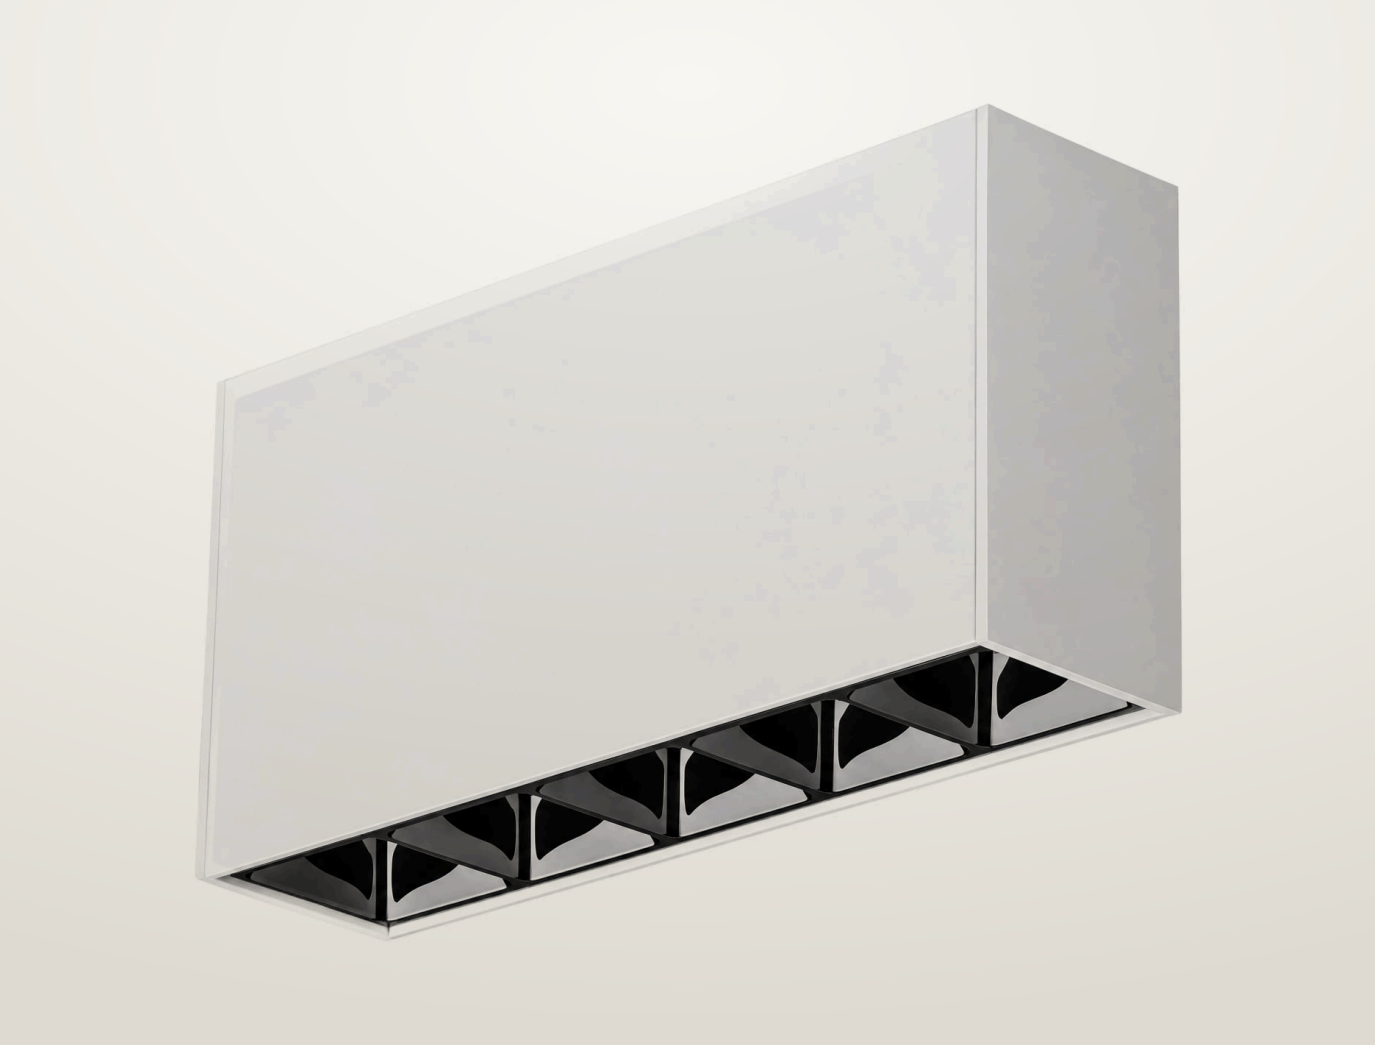


Linear luminaire. 11 W. Three beam angles, 15° to 38°. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **11 W**	Voltage **230 V AC**	Luminous flux **800 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		

Dimensions

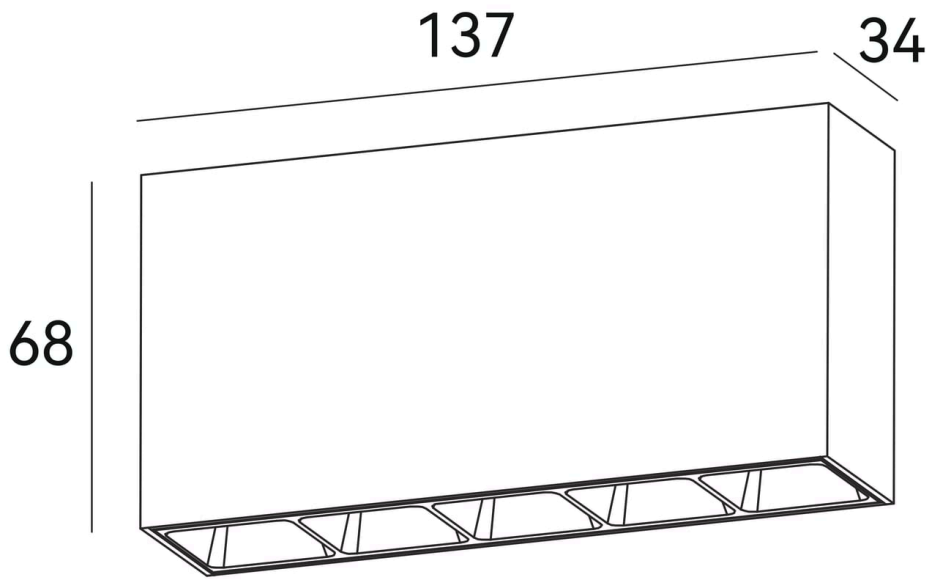


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0217	11 W	230 V AC	800 lm	97 CRI	137 × 34 × 68 mm	15° 24° 38°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0217, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0217, 11 W, 15° beam

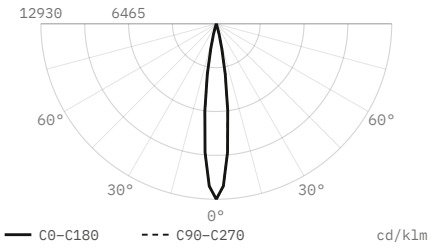


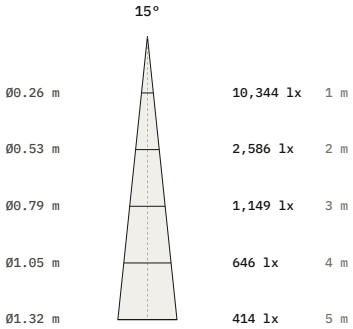

Luminous flux	800 lm
Efficacy	73 lm/W
Peak intensity	10,344 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	137 × 34 × 68 mm
Data	Calculated from catalogue data


CH0217, 11 W, 24° beam

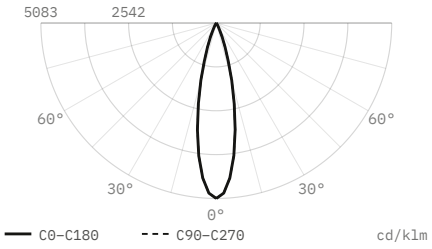


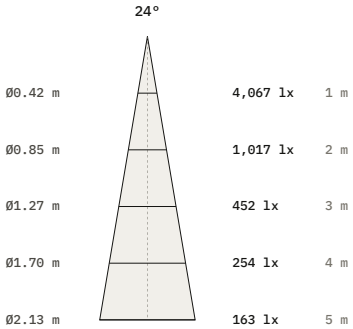

Luminous flux	800 lm
Efficacy	73 lm/W
Peak intensity	4,067 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	137 × 34 × 68 mm
Data	Calculated from catalogue data

CH0217, 11 W, 38° beam

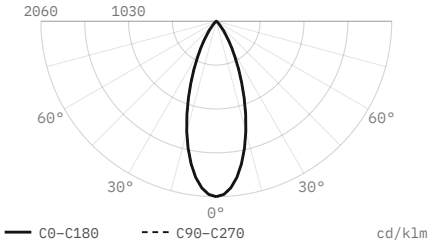

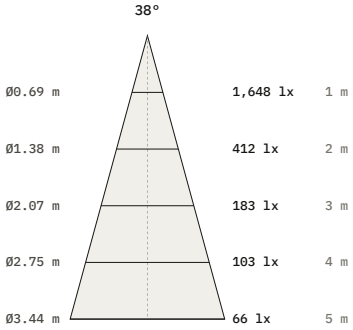

Luminous flux	800 lm
Efficacy	73 lm/W
Peak intensity	1,648 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	137 × 34 × 68 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.