Ceiling

Bet CH0251

Surface luminaire




Surface luminaire. 13 W. 24° or 38° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **13 W**	Voltage **230 V AC**	Luminous flux **900 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **White**		

Dimensions

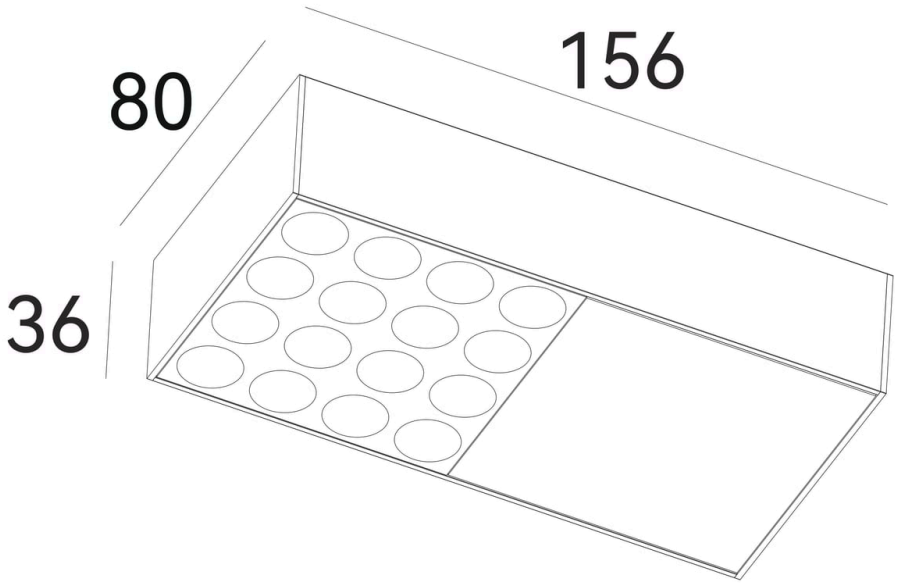


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0251	13 W	230 V AC	900 lm	97 CRI	156 × 80 × 36 mm	24° 38°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0251, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0251, 13 W, 24° beam

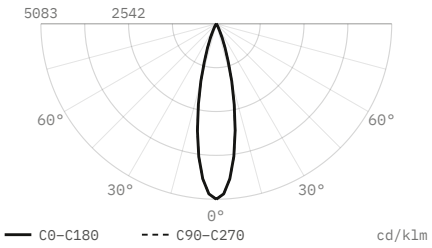


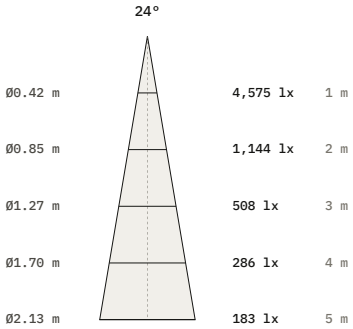

Luminous flux	900 lm
Efficacy	69 lm/W
Peak intensity	4,575 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	156 × 80 × 36 mm
Data	Calculated from catalogue data

CH0251, 13 W, 38° beam

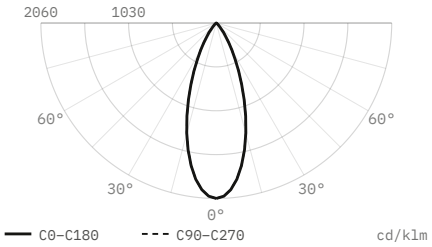

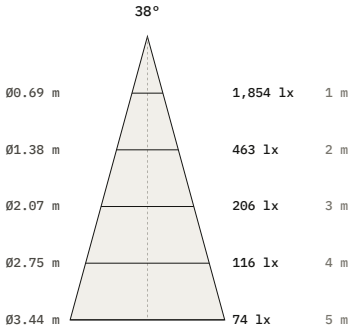

Luminous flux	900 lm
Efficacy	69 lm/W
Peak intensity	1,854 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	156 × 80 × 36 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.