Ceiling

Bet CH0283

Surface luminaire




Surface luminaire. 32 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **32 W**	Voltage **230 V AC**	Luminous flux **2560 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **Black**		

Dimensions

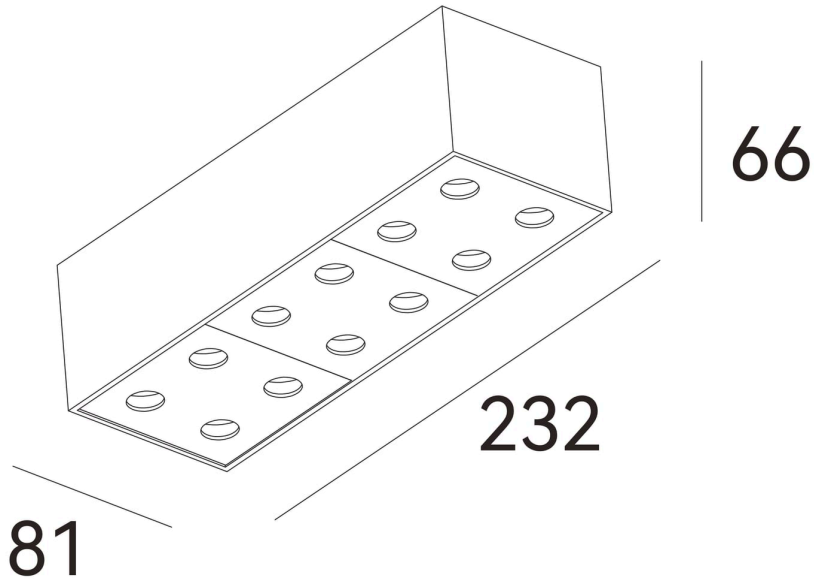


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0283	32 W	230 V AC	2560 lm	97 CRI	L232 x W81 x H66 mm	24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0283, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0283, 32 W, 24° beam

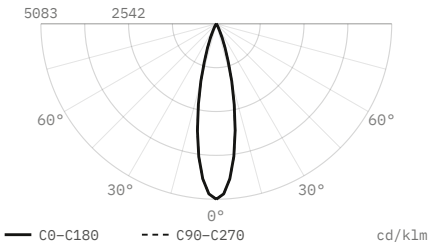


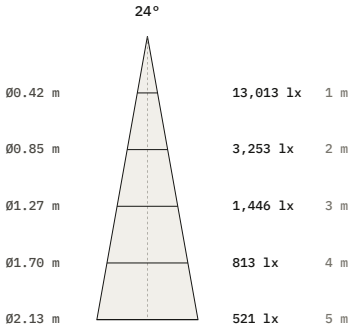

Luminous flux	2,560 lm
Efficacy	80 lm/W
Peak intensity	13,013 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	232 × 81 × 66 mm
Data	Calculated from catalogue data

CH0283, 32 W, 36° beam

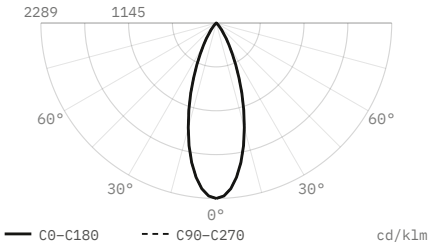

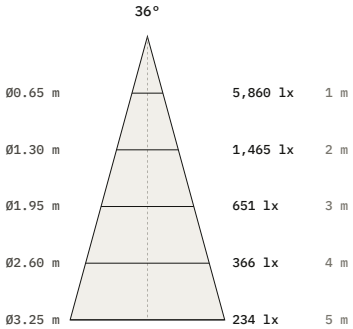

Luminous flux	2,560 lm
Efficacy	80 lm/W
Peak intensity	5,860 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	232 × 81 × 66 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.