Ceiling

Bet CH0293

Surface luminaire




Surface luminaire. 10 W. Three beam angles, 15° to 36°. 2700, 3000, 4000, 5000 K. IP65. 97 CRI.

- LED source: Citizen

Power **10 W**	Voltage **220–240 V AC**	Luminous flux **900 lm**
Colour temperature **2700 K, 3000 K, 4000 K, 5000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°**
IP rating **IP65**	Certifications **CE**	Mounting **Surface**
Finishes **Black**		

Dimensions

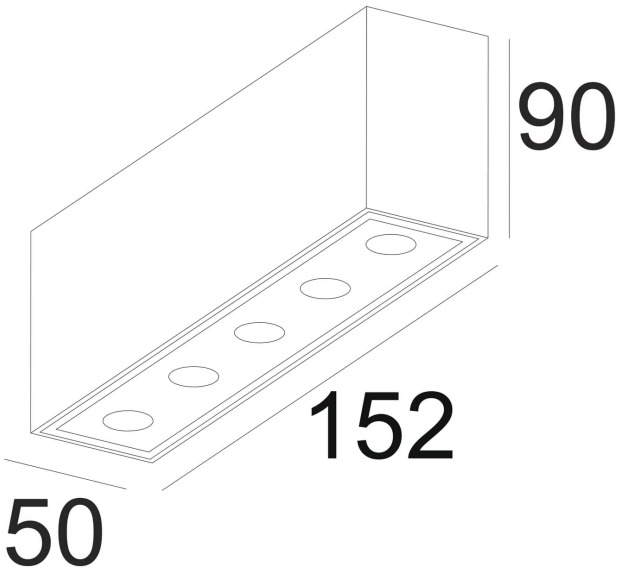


Models


Code	Power	Voltage	Flux	CRI	Size	Beam
CH0293	10 W	220–240 V AC	900 lm	97 CRI	L152 x W50 x H90 mm	15° 24° 36°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0293, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


CH0293, 10 W, 15° beam

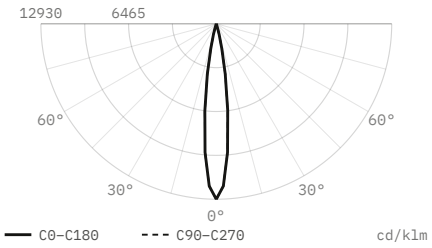


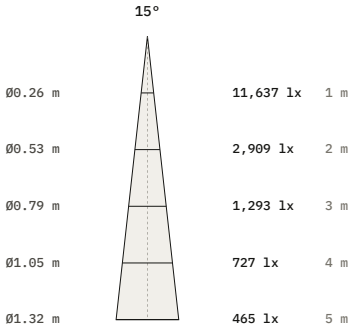

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	11,637 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	152 × 50 × 90 mm
Data	Calculated from catalogue data


CH0293, 10 W, 24° beam

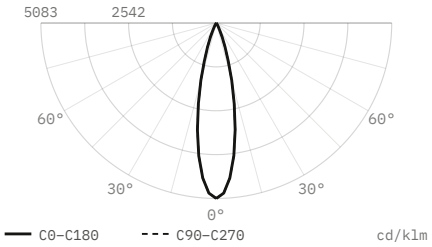


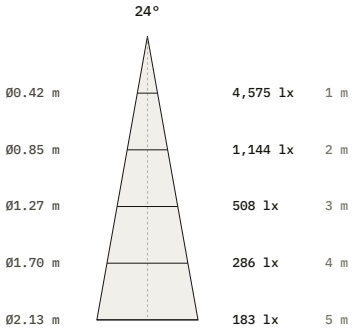

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	4,575 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	152 × 50 × 90 mm
Data	Calculated from catalogue data

CH0293, 10 W, 36° beam

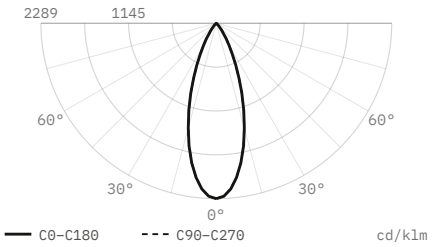

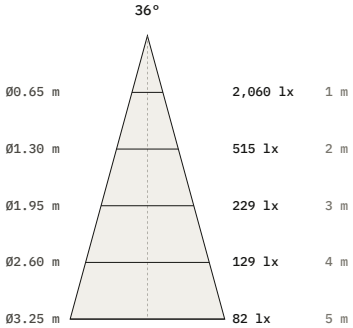

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	2,060 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	152 × 50 × 90 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.