Ceiling

Bet CH0295

Surface luminaire




Surface luminaire. 7 W. 60° beam. 2700, 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **7 W**	Voltage **max 18 V**	Luminous flux **630 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **60°**
IP rating **IP20**	Certifications **CE**	Mounting **Surface**
Finishes **Black**		

Dimensions

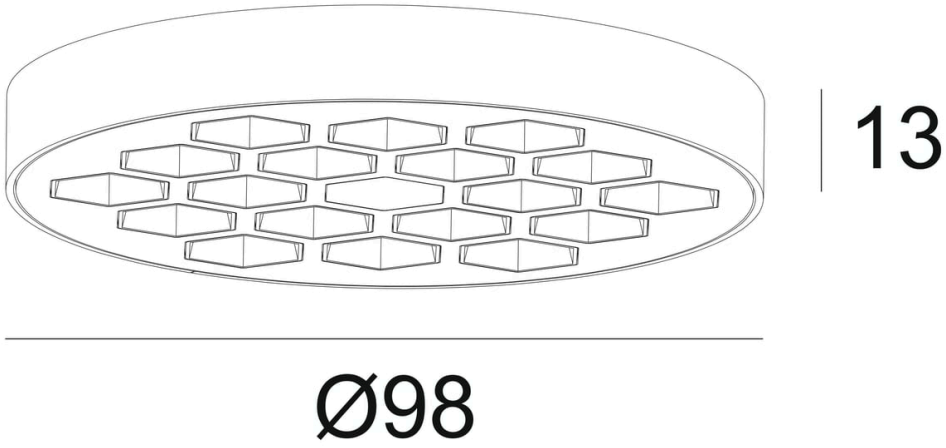


Models


Code	Power	Voltage	Flux	CRI	Size	Beam	Notes
CH0295	7 W	max 18 V	630 lm	97 CRI	Ø98 × 13 mm	60°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0295, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0295, 7 W, 60° beam

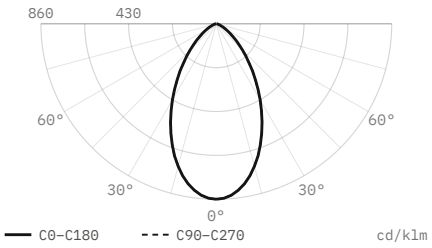

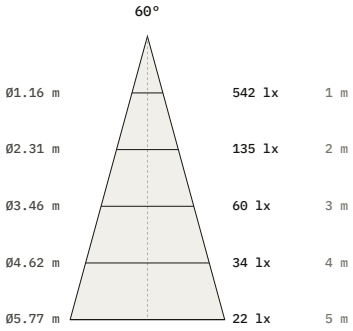

Luminous flux	**630 lm**
Efficacy	**90 lm/W**
Peak intensity	**542 cd, 860 cd/klm**
Beam angle (50%)	**60°**
Field angle (10%)	**109.4°**
Cut-off angle (2.5%)	**69°**
Flux 0–30° / 30–60° / 60–90°	**52.4 / 42.6 / 5 %**
Size	**Ø98 × 13 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.