Downlights

Bet DL0059

Recessed spotlight




Recessed spotlight. 13 W. 34° or 48° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø64 mm
- LED source: Citizen

Power **13 W**	Voltage **max 37 V**	Luminous flux **1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **34°, 48°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

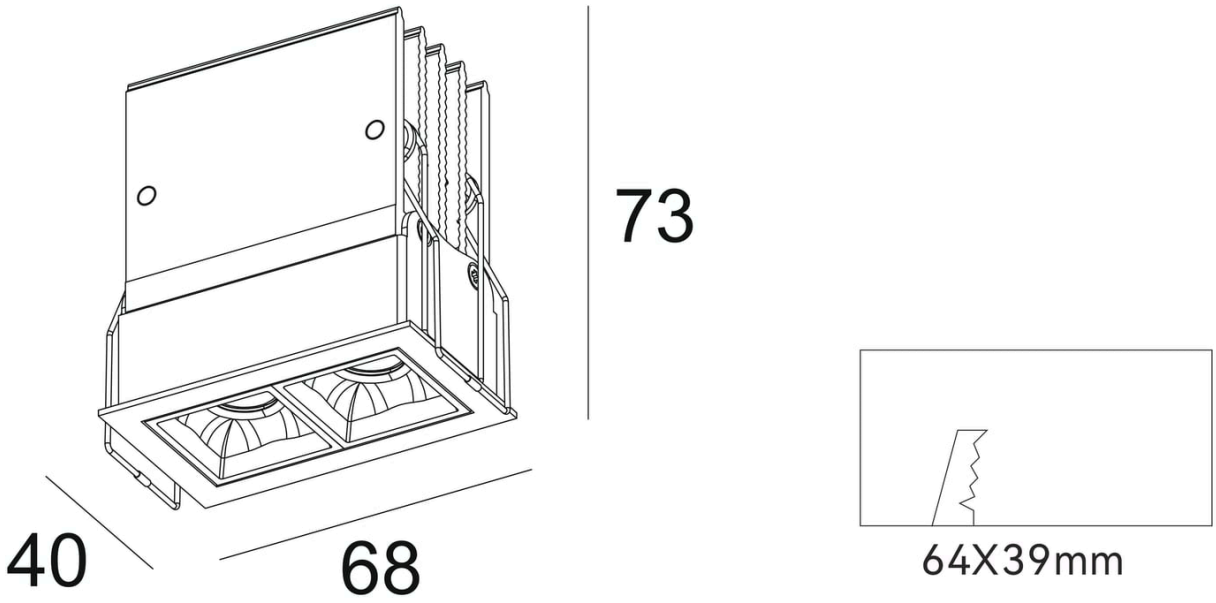


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0059	13 W	max 37 V	1180 lm	97 CRI	L68 x W40 x H73 mm	Ø64 mm	34° 48°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0059, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0059, 13 W, 34° beam

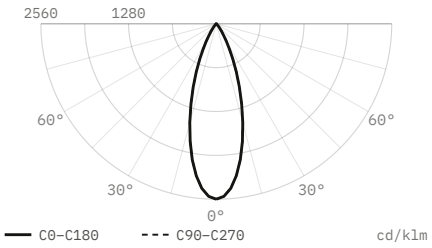


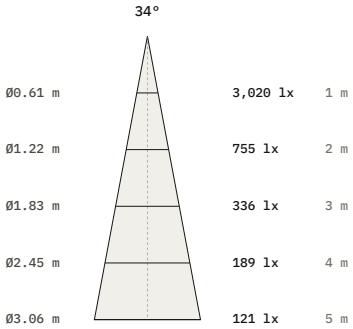

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	3,020 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	68 × 40 × 73 mm
Data	Calculated from catalogue data

DL0059, 13 W, 48° beam

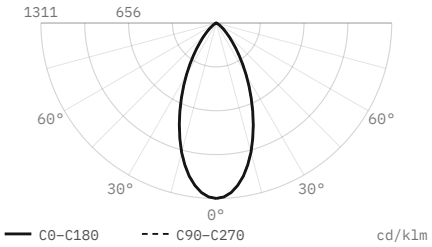

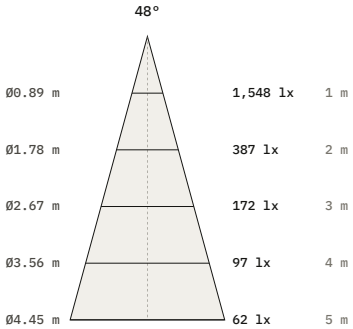

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,548 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	68 × 40 × 73 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.