Downlights

Bet DL0060

Recessed spotlight




Recessed spotlight. 18 W. 34° or 48° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø95 mm
- LED source: Citizen

Power **18 W**	Voltage **max 37 V**	Luminous flux **1700 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **34°, 48°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

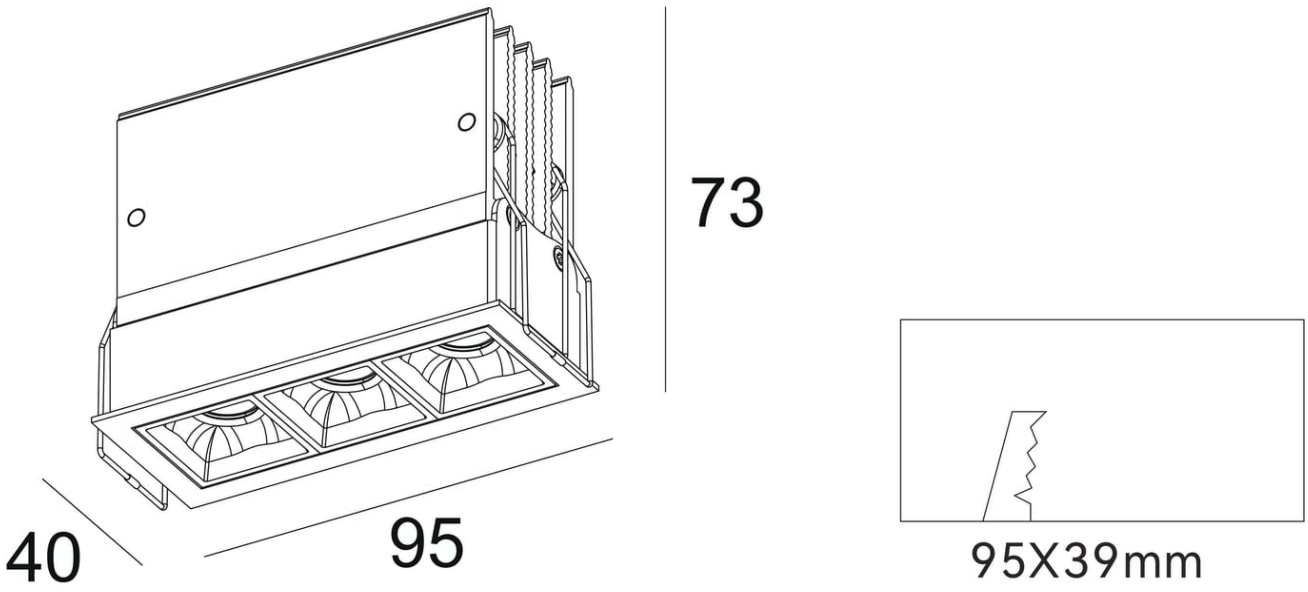


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0060	18 W	max 37 V	1700 lm	97 CRI	L95 x W40 x H73 mm	Ø95 mm	34° 48°	500 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0060, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0060, 18 W, 34° beam

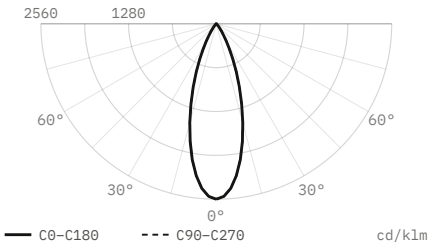


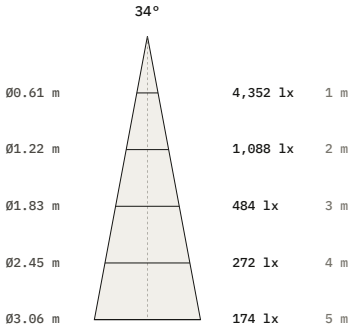

Luminous flux	1,700 lm
Efficacy	94 lm/W
Peak intensity	4,352 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	95 × 40 × 73 mm
Data	Calculated from catalogue data

DL0060, 18 W, 48° beam

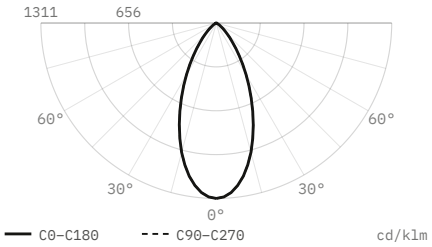

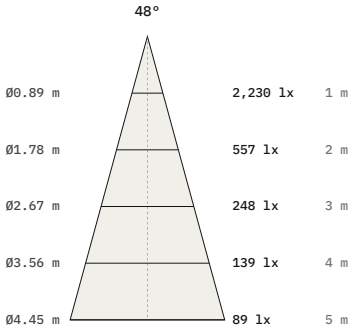

Luminous flux	1,700 lm
Efficacy	94 lm/W
Peak intensity	2,230 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	95 × 40 × 73 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.