Downlights

Bet DL0061

Recessed spotlight





Recessed spotlight. 22 W. 34° or 48° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø120 mm
- LED source: Citizen

Power 22 W	Voltage max 37 V	Luminous flux 2200 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 34°, 48°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

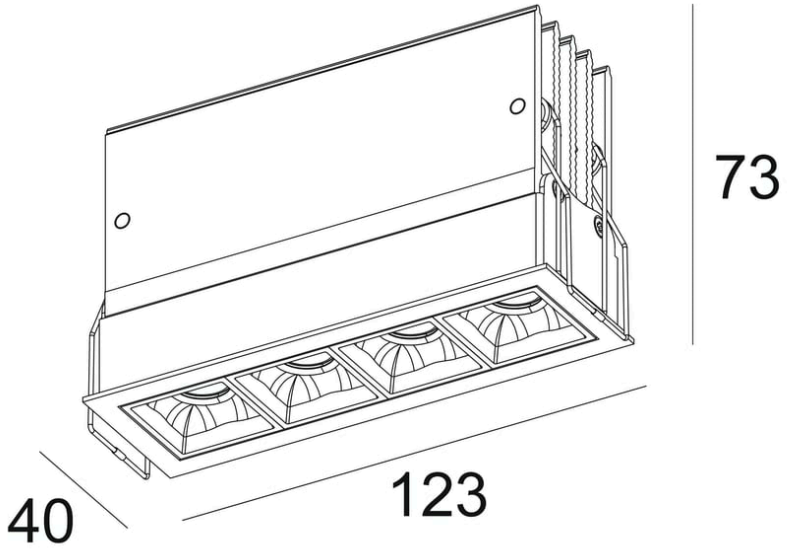

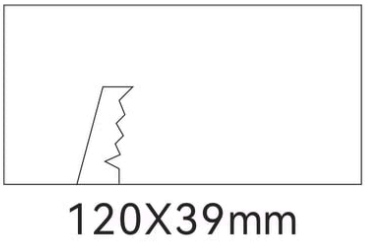


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0061	22 W	max 37 V	2200 lm	97 CRI	L123 x W40 x H73 mm	Ø120 mm	34° 48°	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0061, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0061, 22 W, 34° beam

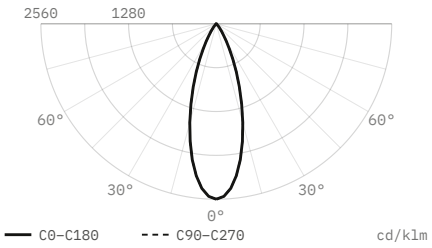


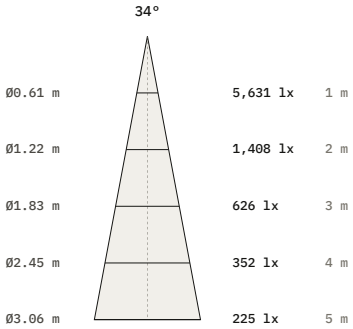

Luminous flux	2,200 lm
Efficacy	100 lm/W
Peak intensity	5,631 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	123 × 40 × 73 mm
Data	Calculated from catalogue data

DL0061, 22 W, 48° beam

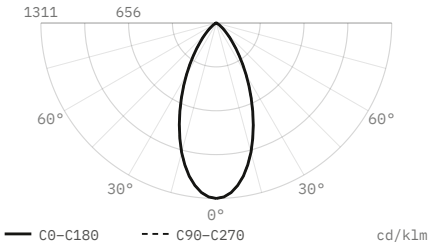

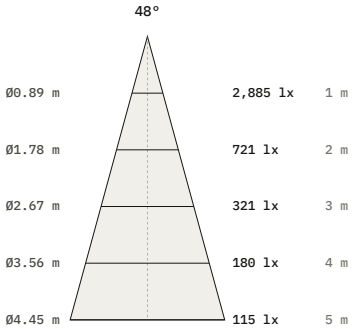

Luminous flux	2,200 lm
Efficacy	100 lm/W
Peak intensity	2,885 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	123 × 40 × 73 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.