Downlights

Bet DL0062

Recessed spotlight




Recessed spotlight. 26 W. 34° or 48° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø142 mm
- LED source: Citizen

Power **26 W**	Voltage **max 37 V**	Luminous flux **2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **34°, 48°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

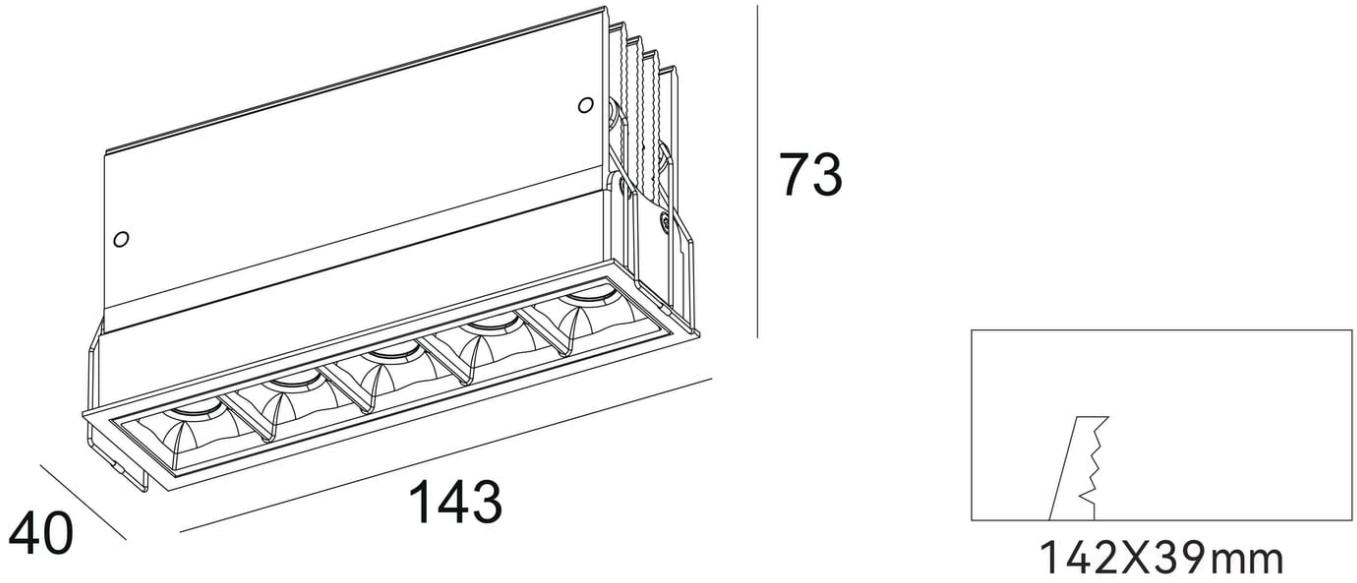


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0062	26 W	max 37 V	2600 lm	97 CRI	L143 x W40 x H73 mm	Ø142 mm	34° 48°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0062, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0062, 26 W, 34° beam

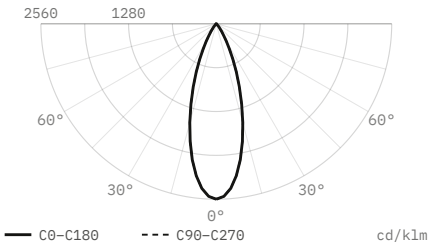


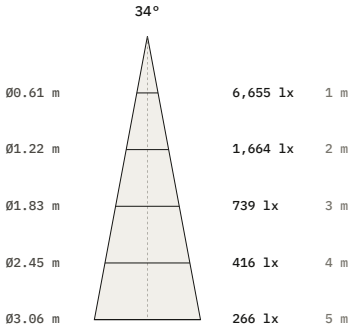

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	6,655 cd, 2,560 cd/klm
Beam angle (50%)	34°
Field angle (10%)	62°
Cut-off angle (2.5%)	39°
Flux 0–30° / 30–60° / 60–90°	89 / 11 / 0 %
Size	143 × 40 × 73 mm
Data	Calculated from catalogue data

DL0062, 26 W, 48° beam

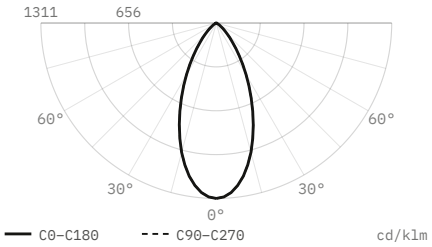

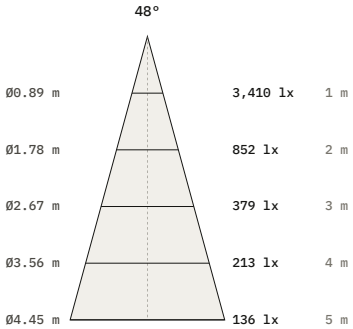

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,410 cd, 1,311 cd/klm
Beam angle (50%)	48°
Field angle (10%)	87.5°
Cut-off angle (2.5%)	55°
Flux 0–30° / 30–60° / 60–90°	67.7 / 31.2 / 1.1 %
Size	143 × 40 × 73 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.