Downlights

Bet DL0651

Recessed spotlight





Recessed spotlight. 19 W. Three beam angles, 15° to 45°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø150 mm
- LED source: Citizen

Power **19 W**	Voltage **3 × max 54 V**	Luminous flux **1800 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 30°, 45°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

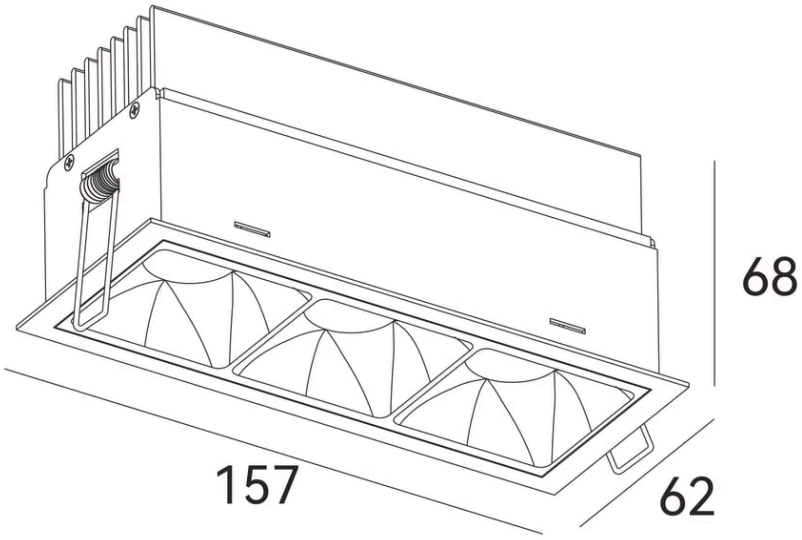

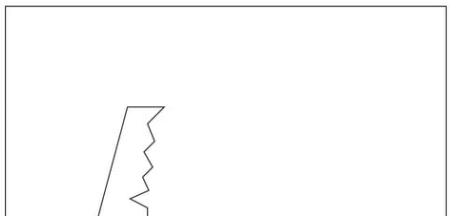


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0651	19 W	3 × max 54 V	1800 lm	97 CRI	L157 x W62 x H68 mm	Ø150 mm	15° 30° 45°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0651, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0651, 19 W, 15° beam

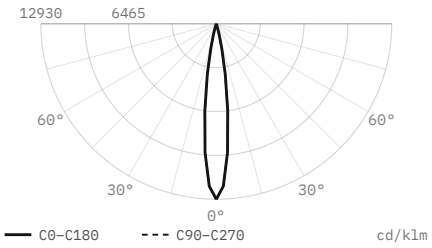


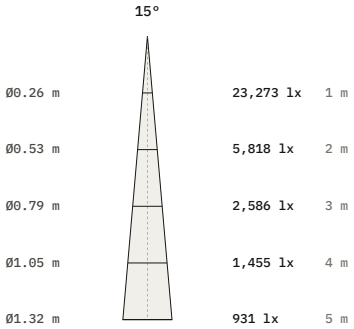

Luminous flux	1,800 lm
Efficacy	95 lm/W
Peak intensity	23,273 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	157 × 62 × 68 mm
Data	Calculated from catalogue data


DL0651, 19 W, 30° beam

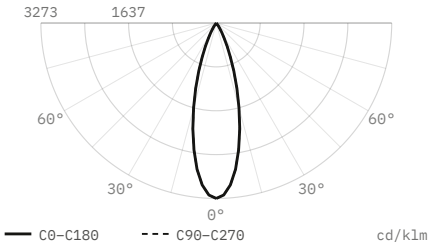


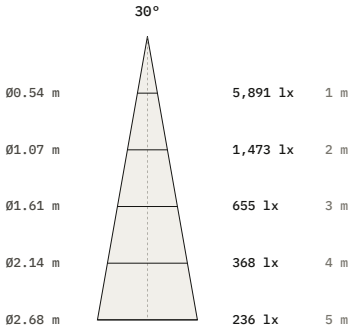

Luminous flux	1,800 lm
Efficacy	95 lm/W
Peak intensity	5,891 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	157 × 62 × 68 mm
Data	Calculated from catalogue data

DL0651, 19 W, 45° beam

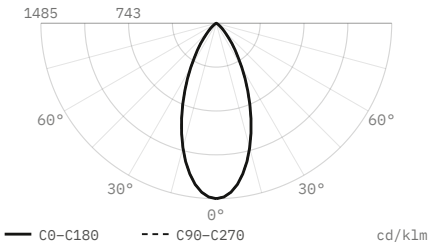

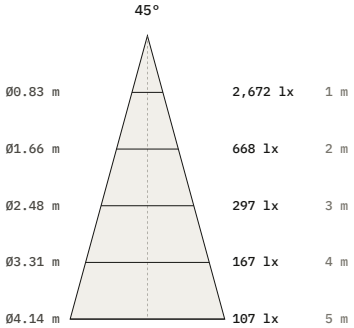

Luminous flux	1,800 lm
Efficacy	95 lm/W
Peak intensity	2,672 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	157 × 62 × 68 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.