
Downlights

Bet DL0753

Recessed spotlight

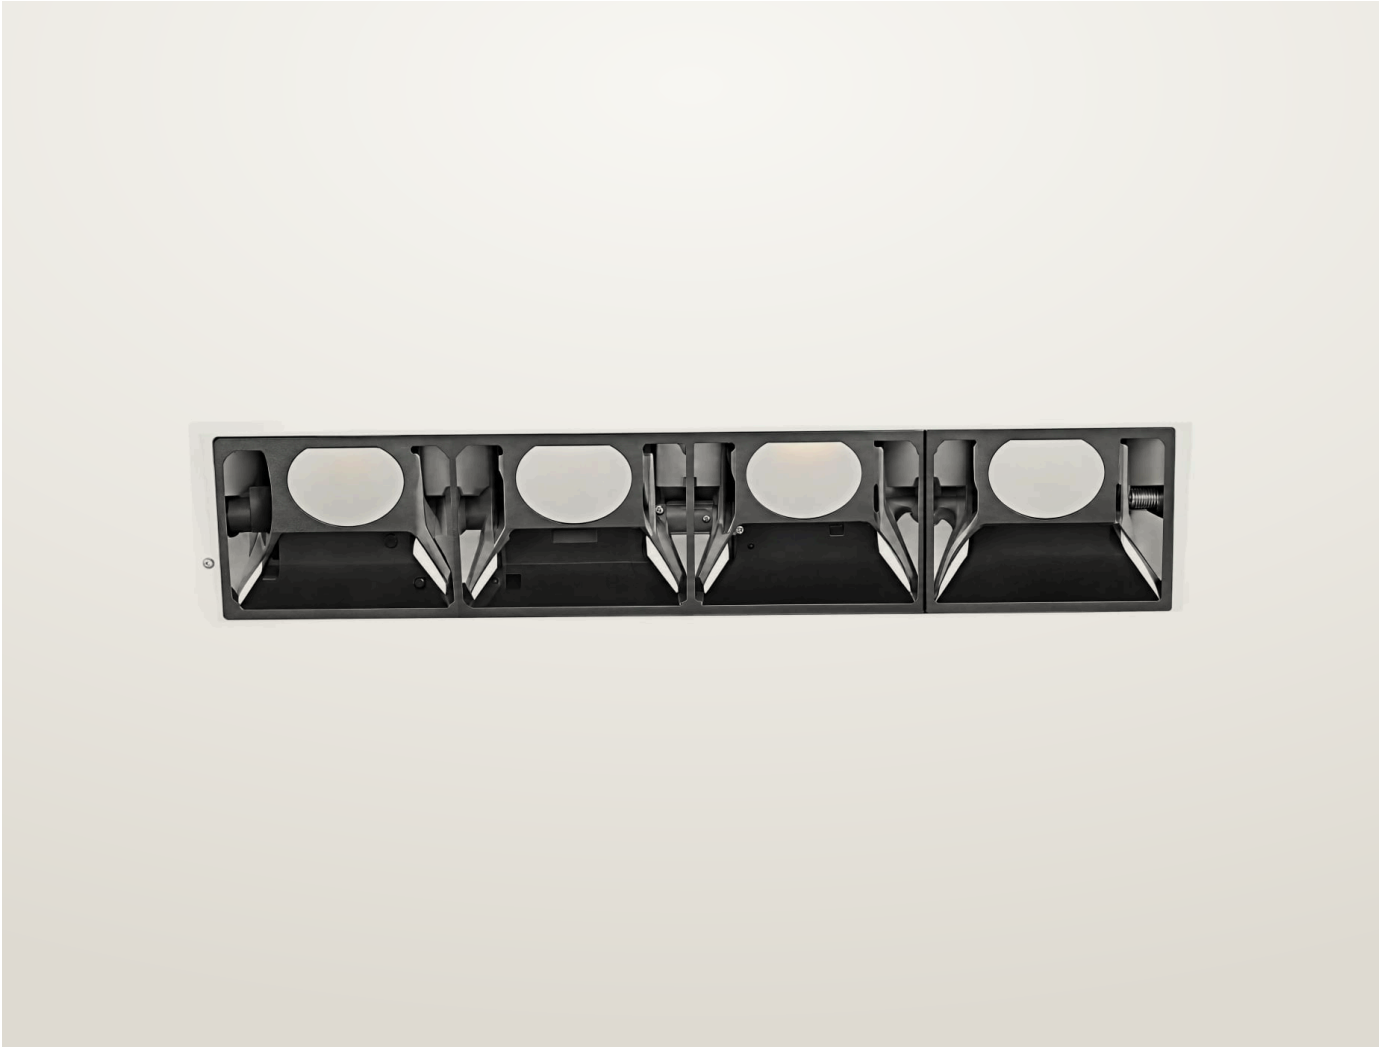


Recessed spotlight. 22 W. Three beam angles, 15° to 45°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø202 mm
- LED source: Citizen

Power	Voltage	Luminous flux
22 W	4 × max 37 V	2200 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	15°, 30°, 45°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed
Finishes		
Black		

Dimensions

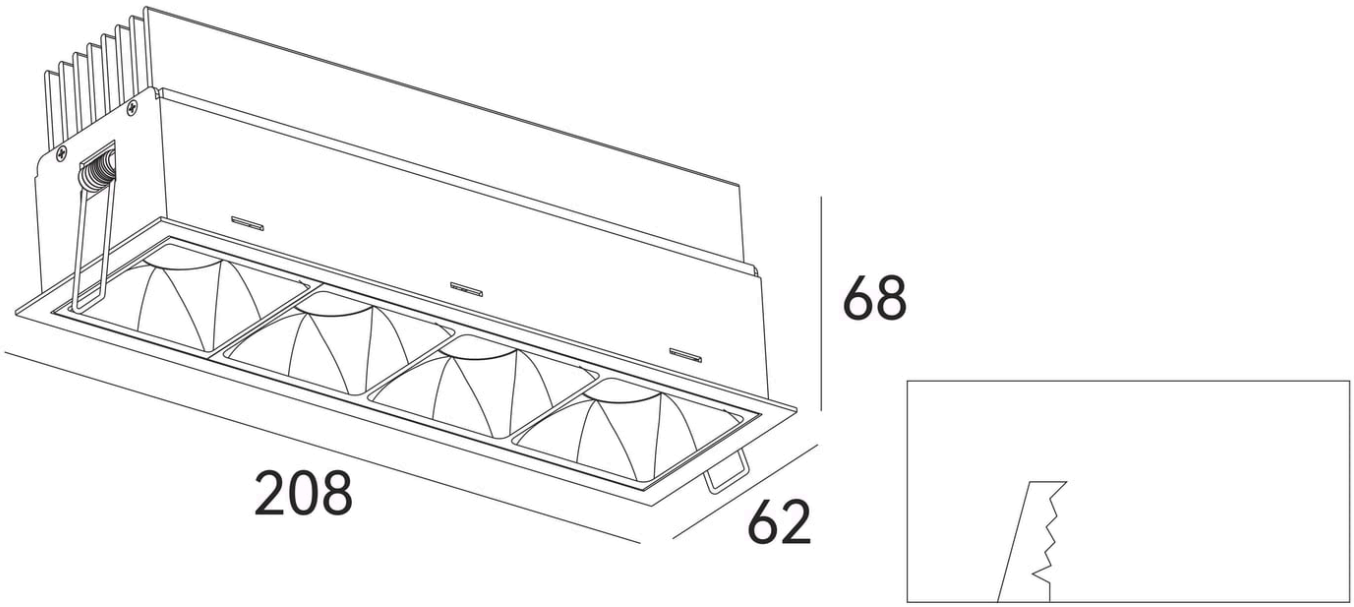


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0753	22 W	4 × max 37 V	2200 lm	97 CRI	L208 x W62 x H68 mm	Ø202 mm	15° 30° 45°	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0753, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0753, 22 W, 15° beam

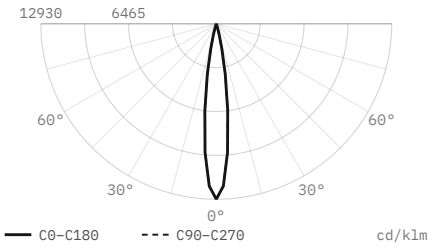


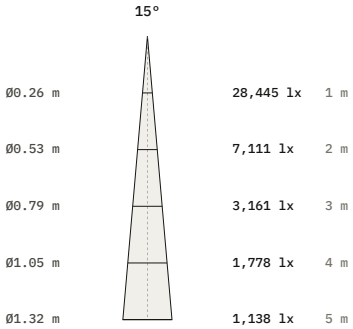

Luminous flux	2,200 lm
Efficacy	100 lm/W
Peak intensity	28,445 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	208 × 62 × 68 mm
Data	Calculated from catalogue data


DL0753, 22 W, 30° beam

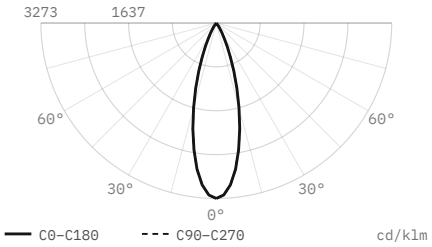


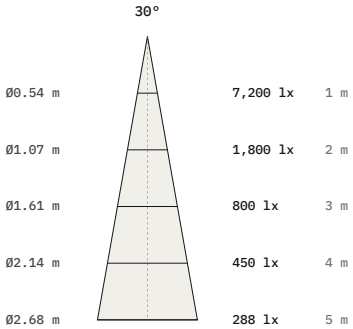

Luminous flux	2,200 lm
Efficacy	100 lm/W
Peak intensity	7,200 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	208 × 62 × 68 mm
Data	Calculated from catalogue data

DL0753, 22 W, 45° beam

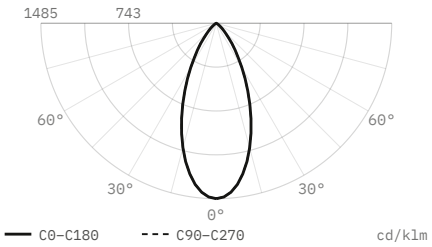

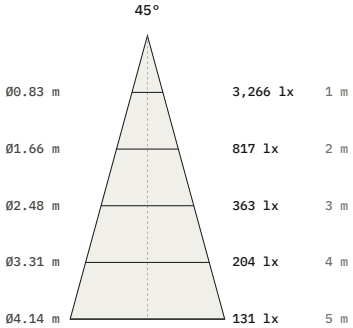

Luminous flux	2,200 lm
Efficacy	100 lm/W
Peak intensity	3,266 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	208 × 62 × 68 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.