Downlights

Bet DL0754

Recessed spotlight





Recessed spotlight. 26 W. Three beam angles, 15° to 45°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø245 mm
- LED source: Citizen

Power **26 W**	Voltage **5 × max 37 V**	Luminous flux **2600 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 30°, 45°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

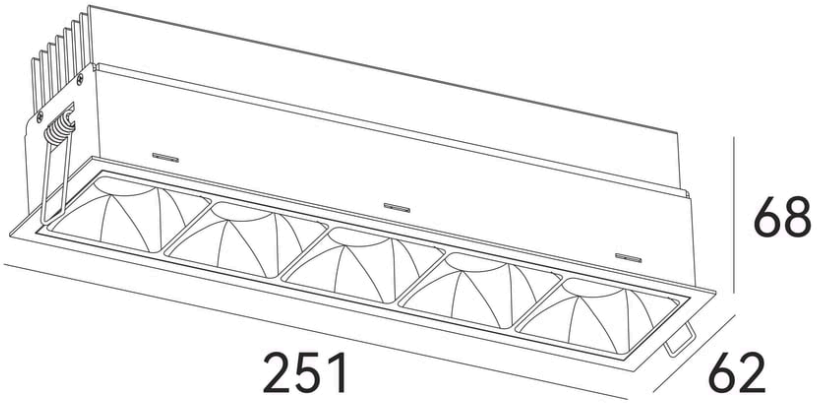

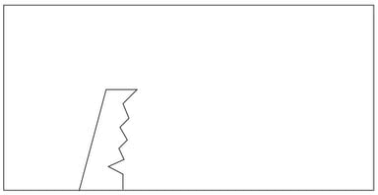


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0754	26 W	5 × max 37 V	2600 lm	97 CRI	L251 x W62 x H68 mm	Ø245 mm	15° 30° 45°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0754, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0754, 26 W, 15° beam

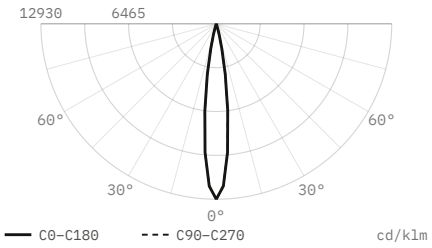


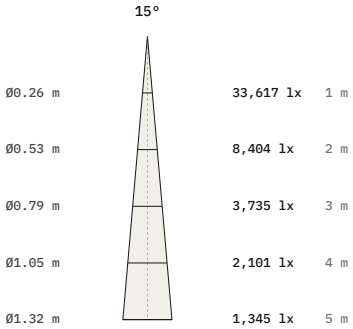

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	33,617 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	251 × 62 × 68 mm
Data	Calculated from catalogue data


DL0754, 26 W, 30° beam

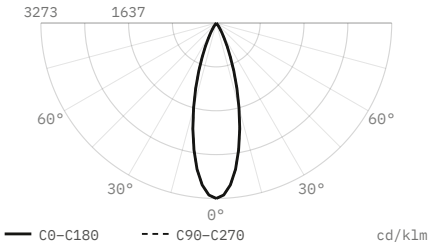


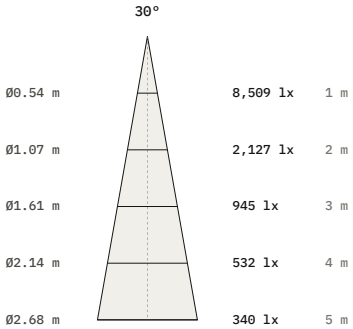

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	8,509 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	251 × 62 × 68 mm
Data	Calculated from catalogue data

DL0754, 26 W, 45° beam

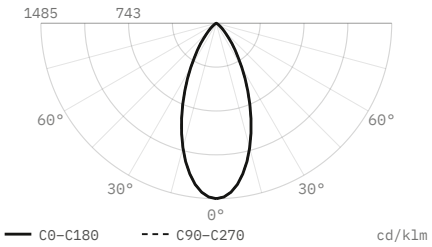

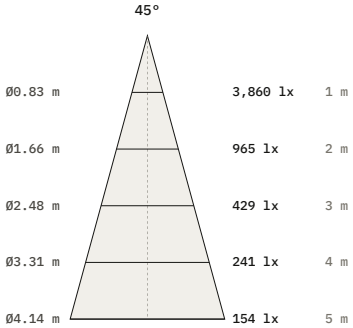

Luminous flux	2,600 lm
Efficacy	100 lm/W
Peak intensity	3,860 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	251 × 62 × 68 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.