Downlights

Bet DL0922

Recessed spotlight




Recessed spotlight. 24 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø120 mm
- LED source: Citizen

Power **24 W**	Voltage **max 30 V**	Luminous flux **1920 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

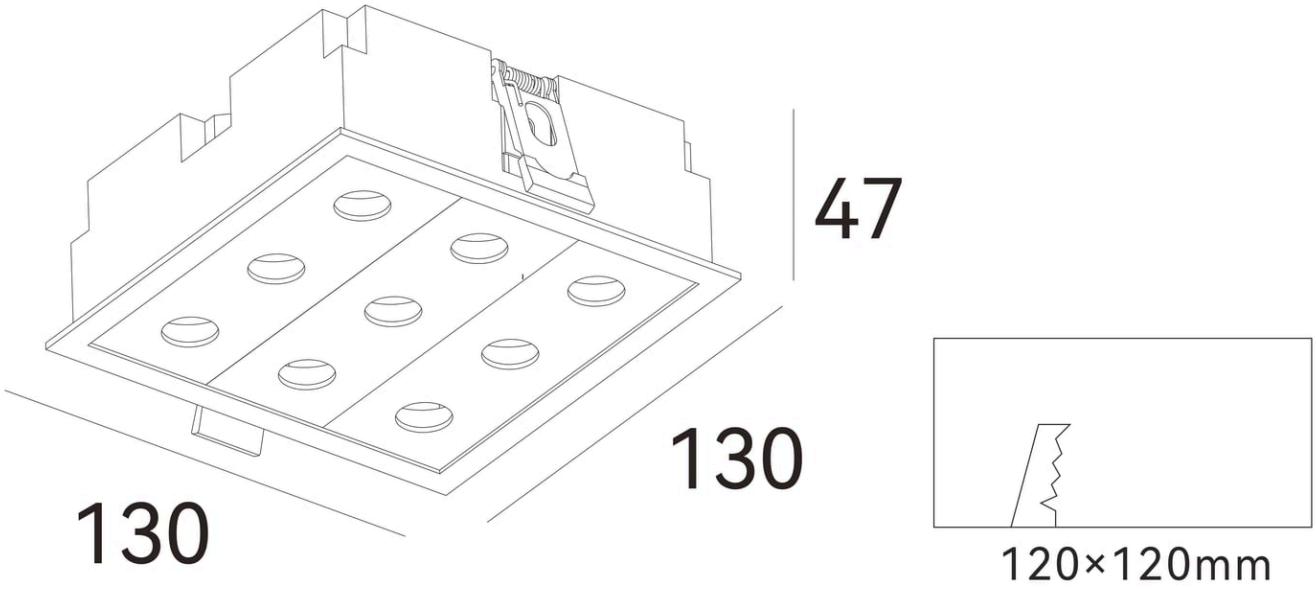


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0922	24 W	max 30 V	1920 lm	97 CRI	130 × 130 x H47 mm	Ø120 mm	24° 36°	800 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0922, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0922, 24 W, 24° beam

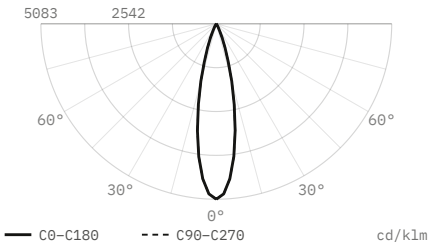


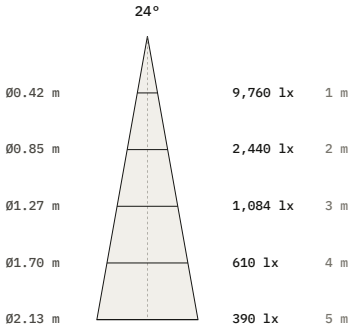

Luminous flux	1,920 lm
Efficacy	80 lm/W
Peak intensity	9,760 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	130 × 130 × 47 mm
Data	Calculated from catalogue data

DL0922, 24 W, 36° beam

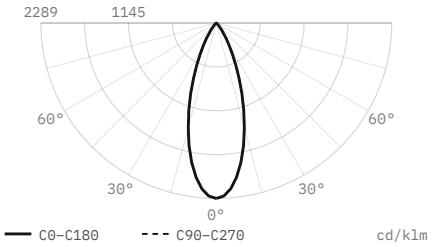

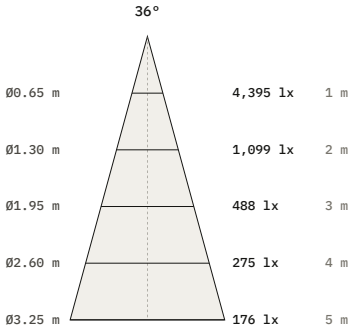

Luminous flux	1,920 lm
Efficacy	80 lm/W
Peak intensity	4,395 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	130 × 130 × 47 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.