Linear

Bet DL1479

Linear luminaire




Linear luminaire. 10 W. Three beam angles, 15° to 38°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø138 mm
- LED source: Citizen

Power **10 W**	Voltage **max 32 V**	Luminous flux **960 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

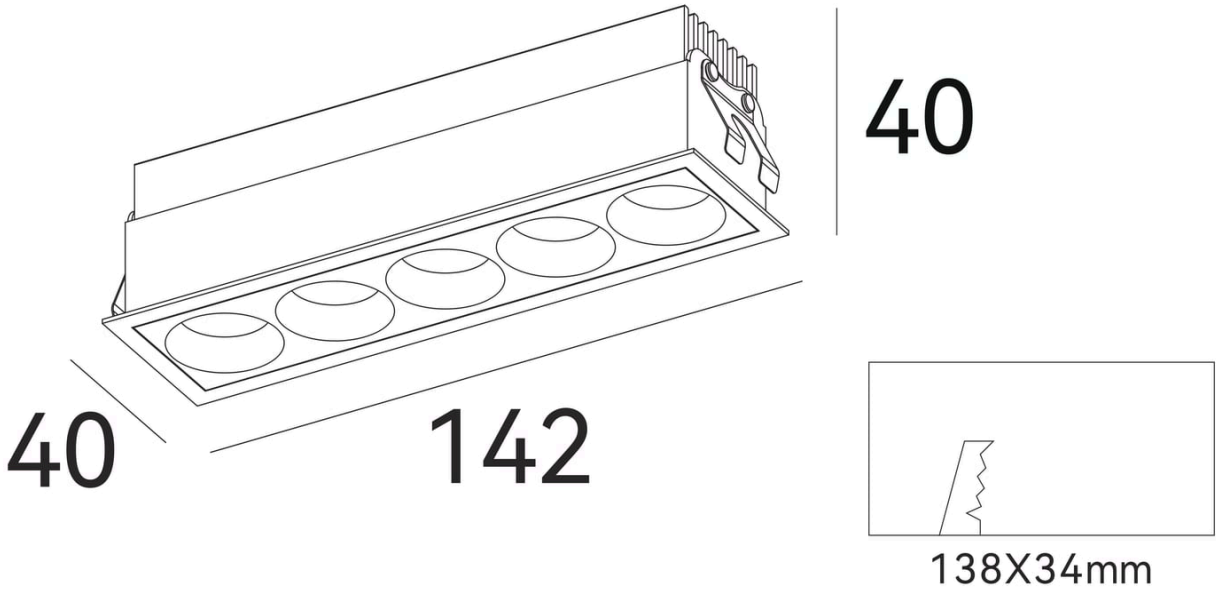


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1479	10 W	max 32 V	960 lm	97 CRI	L142 x W40 x H40 mm	Ø138 mm	15° 24° 38°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1479, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1479, 10 W, 15° beam

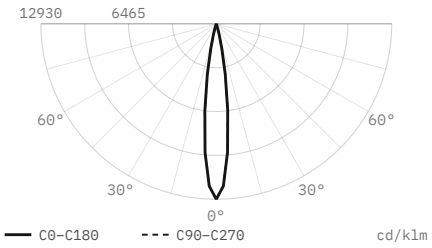


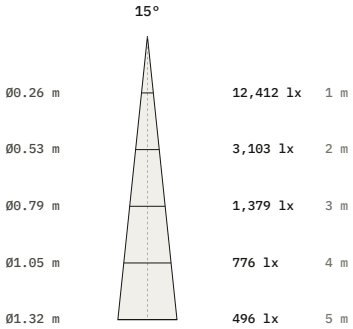

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	12,412 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data


DL1479, 10 W, 24° beam

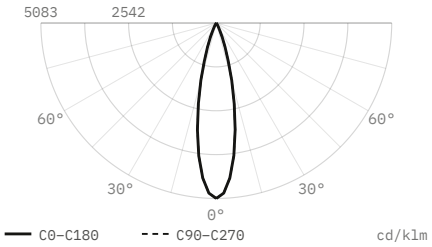


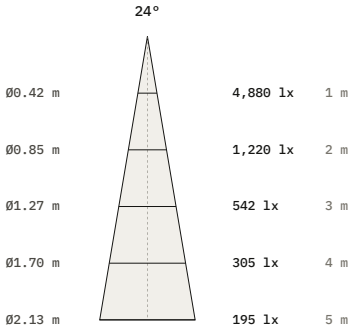

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	4,880 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data

DL1479, 10 W, 38° beam

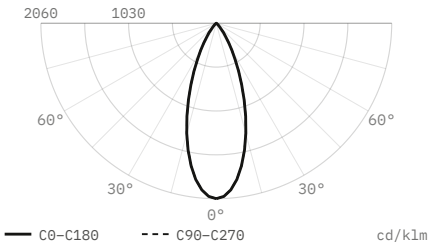

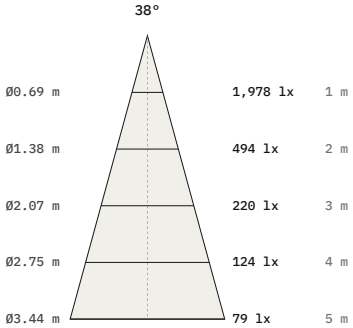

Luminous flux	960 lm
Efficacy	96 lm/W
Peak intensity	1,978 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.