Linear

Bet DL1624

Linear luminaire




Linear luminaire. 10 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø138 mm
- LED source: Citizen

Power **10 W**	Voltage **max 32 V**	Luminous flux **960 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **90°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

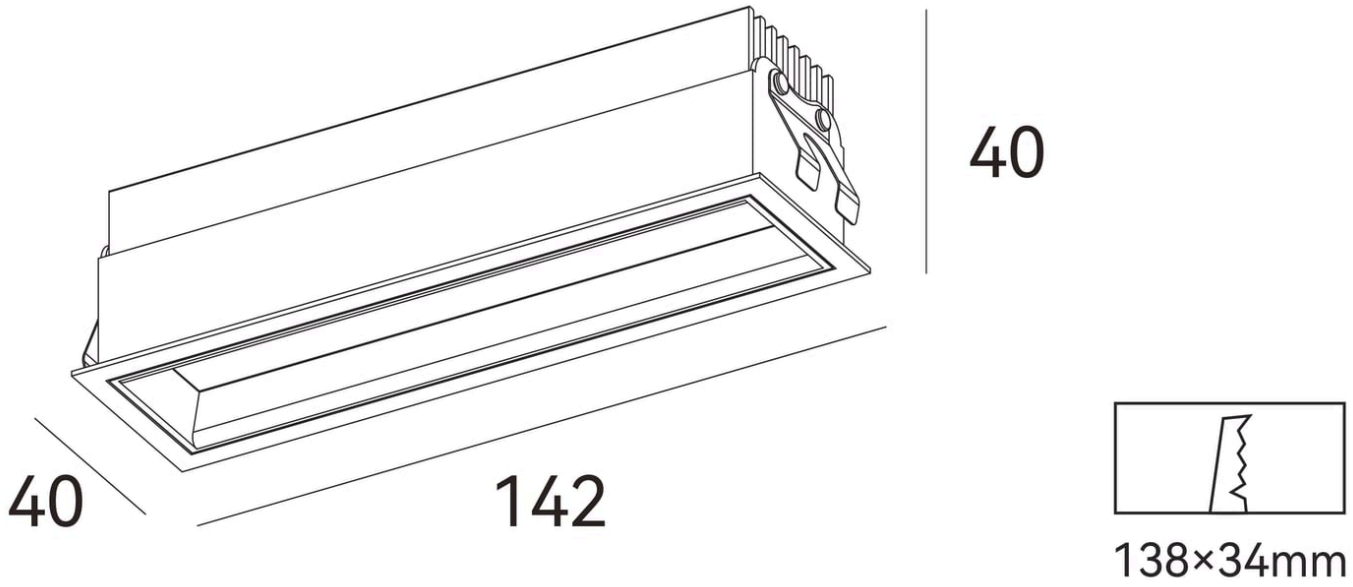


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1624	10 W	max 32 V	960 lm	97 CRI	L142 x W40 x H40 mm	Ø138 mm	90°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1624, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1624, 10 W, 90° beam

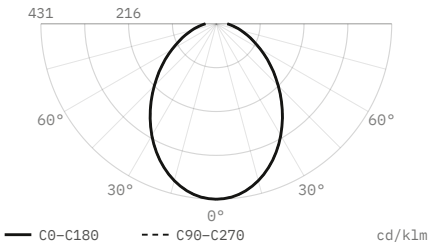

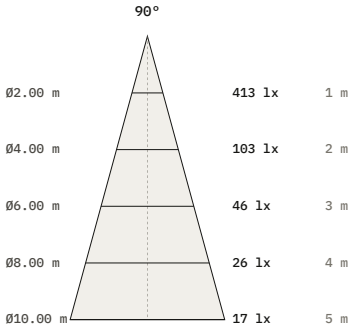

Luminous flux	**960 lm**
Efficacy	**96 lm/W**
Peak intensity	**413 cd, 431 cd/klm**
Beam angle (50%)	**90°**
Field angle (10%)	**164°**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**31.2 / 48 / 20.8 %**
Size	**142 × 40 × 40 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.