Linear

Bet DL1625

Linear luminaire



Linear luminaire. 20 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.


- Ceiling cut-out Ø271 mm
- LED source: Citizen

Power	Voltage	Luminous flux
20 W	max 32 V	1800 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	90°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed

Finishes

Black

Dimensions

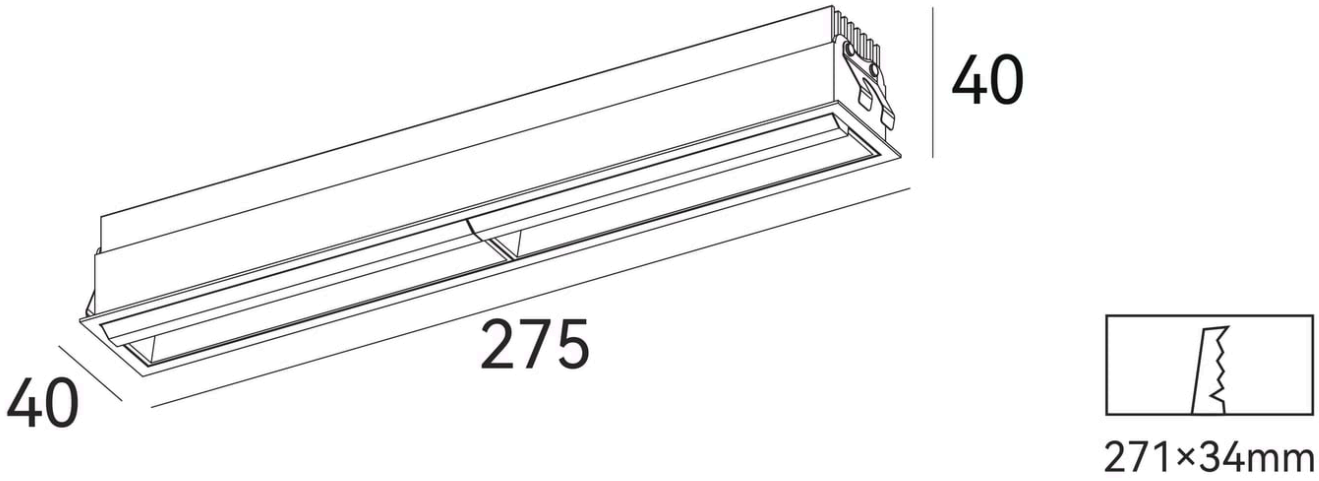

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1625	Wall washer	20 W	max 32 V	1800 lm	97 CRI	L275 x W40 x H40 mm	Ø271 mm	90°	600 mA

Finishes



Black




White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1625, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1625, 20 W, wall washer

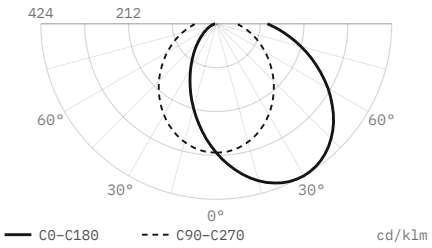

Luminous flux	**1,800 lm**
Efficacy	**90 lm/W**
Peak intensity	**763 cd, 424 cd/klm**
Beam angle (50%)	**asymmetric**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**24.2 / 47.2 / 28.6 %**
Size	**275 × 40 × 40 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.