Linear

Bet DL1631

Linear luminaire



Linear luminaire. 7 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø113 mm
- LED source: Citizen

Power	Voltage	Luminous flux
7 W	max 36 V	630 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	90°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed

Finishes

Black


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1631	7 W	max 36 V	630 lm	97 CRI	L117 x W28 x H29 mm	Ø113 mm	90°	180 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1631, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1631, 7 W, 90° beam

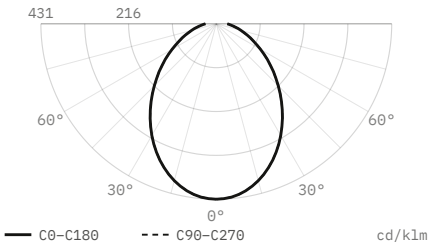

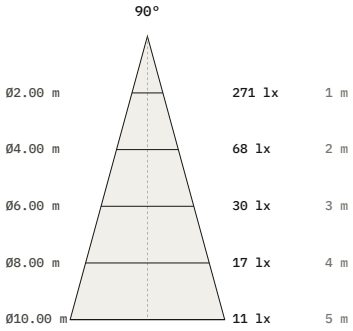

Luminous flux	630 lm
Efficacy	90 lm/W
Peak intensity	271 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	117 × 28 × 29 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.