Linear

Bet DL1633

Linear luminaire



Linear luminaire. 13 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø221 mm
- LED source: Citizen

Power **13 W**	Voltage **max 36 V**	Luminous flux **1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **90°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1633	13 W	max 36 V	1180 lm	97 CRI	L225 x W28 x H29 mm	Ø221 mm	90°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1633, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1633, 13 W, 90° beam

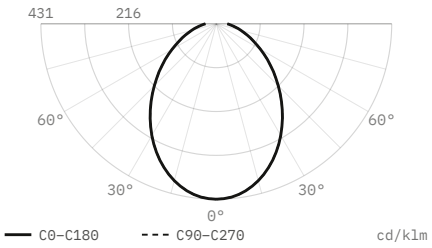

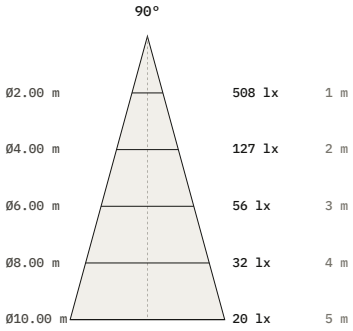

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	508 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	225 × 28 × 29 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.