Linear

# Bet DL1655

Linear luminaire



Linear luminaire. 7 W. 90° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø119 mm
- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**7 W** | Voltage<br>**max 36 V** | Luminous flux<br>**630 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**90°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Recessed** |
| Finishes<br>**Black** | | |


# Models


| Code | Power | Voltage | Flux | CRI | Size | Cut-out | Beam | Notes |
|---|---|---|---|---|---|---|---|---|
| **DL1655** | 7 W | max 36 V | 630 lm | 97 CRI | L108/174 x W22/33 x H45 mm | Ø119 mm | 90° | 180 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1655, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## DL1655, 7 W, 90° beam

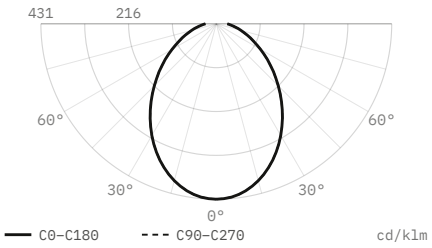

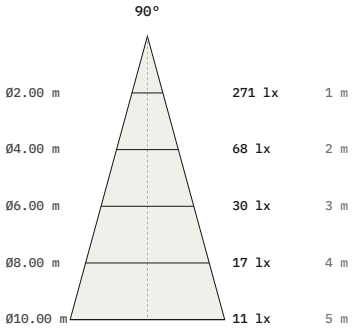
| | |
|---|---|
| Luminous flux | 630 lm |
| Efficacy | 90 lm/W |
| Peak intensity | 271 cd, 431 cd/klm |
| Beam angle (50%) | 90° |
| Field angle (10%) | 164° |
| Cut-off angle (2.5%) | 90° |
| Flux 0–30° / 30–60° / 60–90° | 31.2 / 48 / 20.8 % |
| Size | 108 × 22 × 45 mm |
| Data | Calculated from catalogue data |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.