Linear

Bet DL1661

Linear luminaire



Linear luminaire. 10 W. Three beam angles, 15° to 38°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø138 mm
- LED source: Citizen

Power **10 W**	Voltage **max 32 V**	Luminous flux **910 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1661	10 W	max 32 V	910 lm	97 CRI	L142 x W40 x H40 mm	Ø138 mm	15° 24° 38°	300 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1661, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1661, 10 W, 15° beam

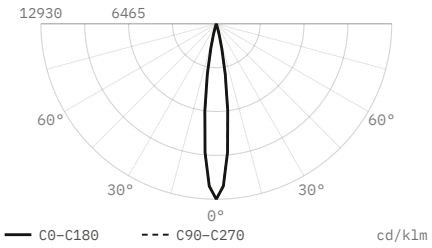


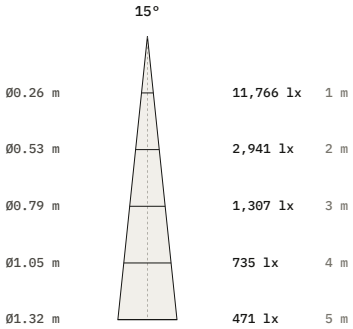

Luminous flux	910 lm
Efficacy	91 lm/W
Peak intensity	11,766 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data


DL1661, 10 W, 24° beam

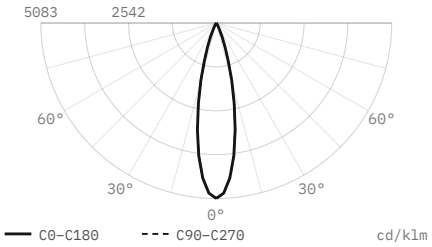


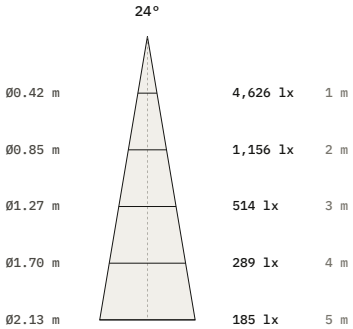

Luminous flux	910 lm
Efficacy	91 lm/W
Peak intensity	4,626 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data

DL1661, 10 W, 38° beam

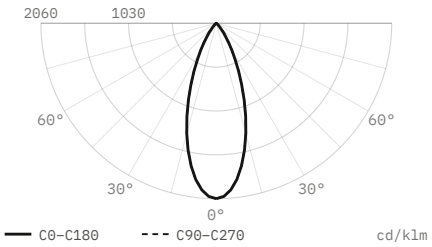

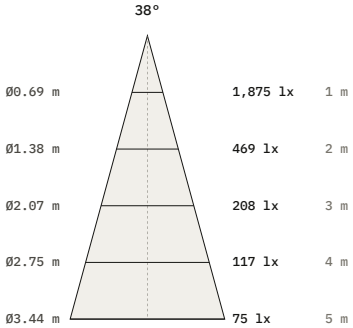

Luminous flux	910 lm
Efficacy	91 lm/W
Peak intensity	1,875 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	142 × 40 × 40 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.