
Downlights

Bet DL1671

Recessed spotlight

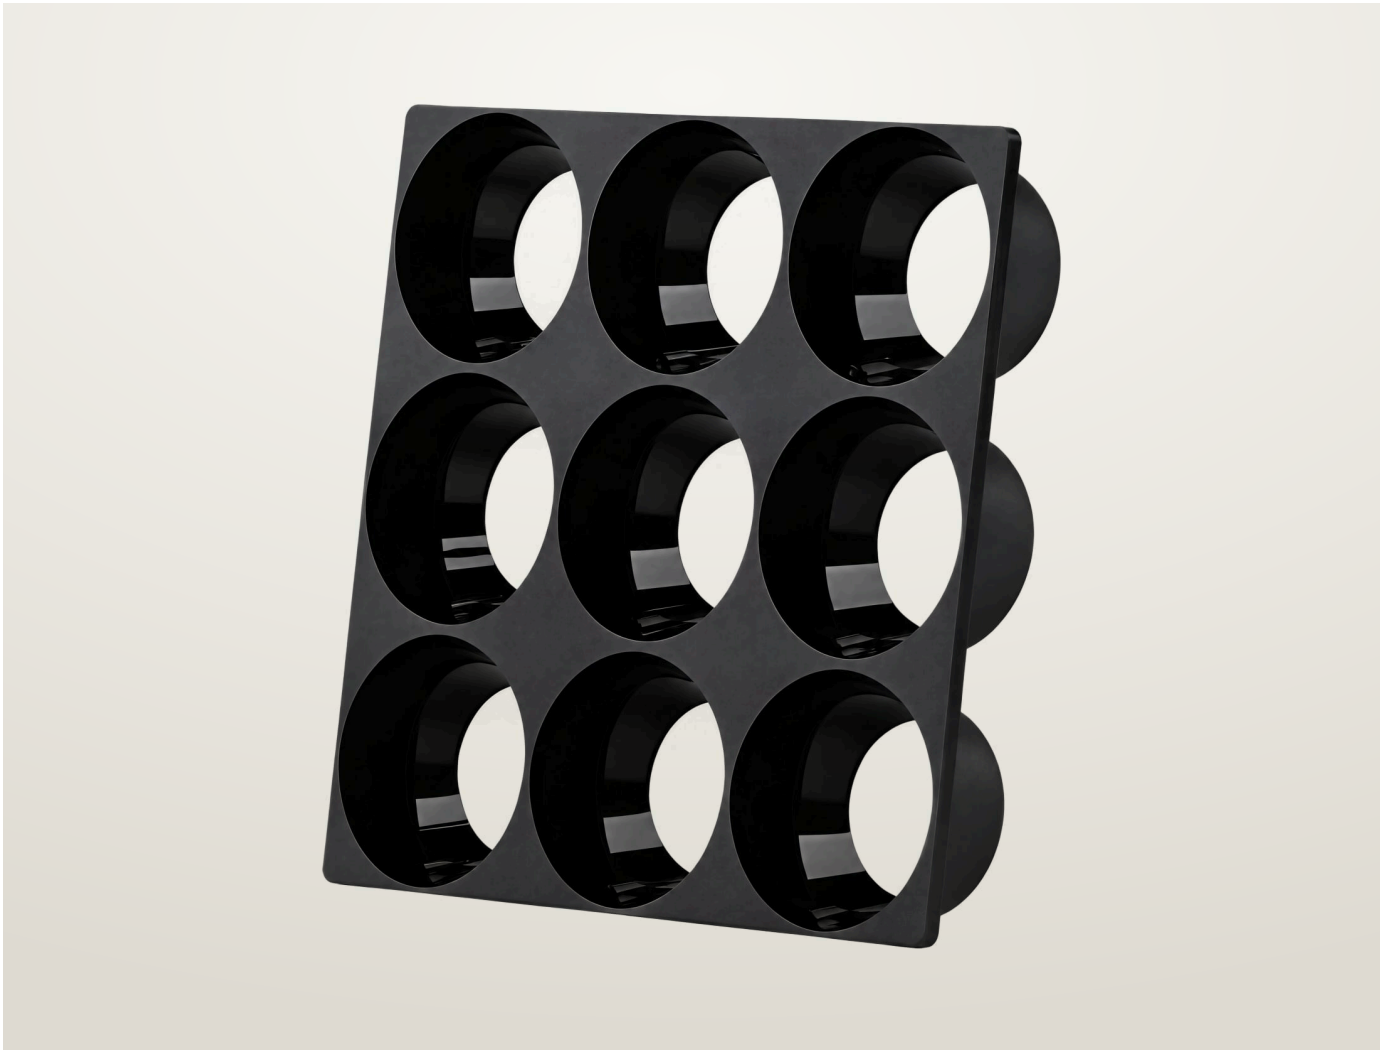

Recessed spotlight. 9 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.


- Ceiling cut-out Ø63 mm
- LED source: Citizen

Power	Voltage	Luminous flux
9 W	max 27 V	720 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	24°, 36°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed

Finishes

White

Dimensions

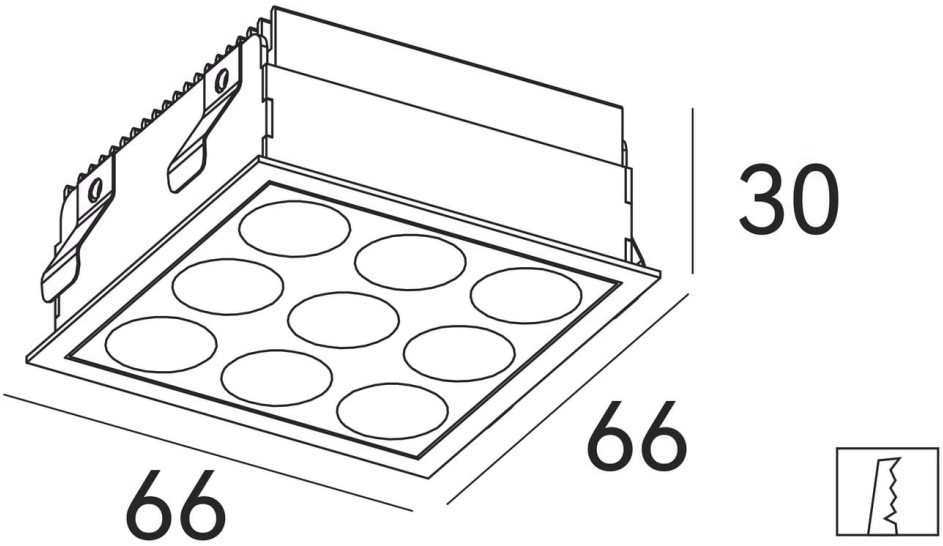


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1671	9 W	max 27 V	720 lm	97 CRI	66 × 66 × 30 mm	Ø63 mm	24° 36°	350 mA

Finishes



Black





White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1671, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1671, 9 W, 24° beam

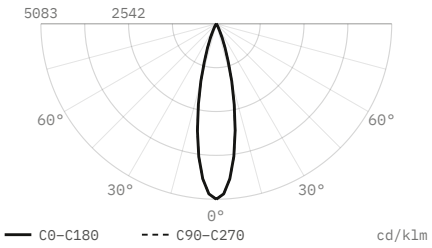


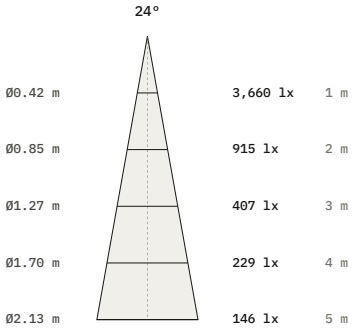

Luminous flux	720 lm
Efficacy	80 lm/W
Peak intensity	3,660 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	66 × 66 × 30 mm
Data	Calculated from catalogue data

DL1671, 9 W, 36° beam

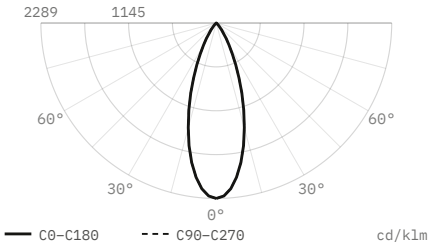

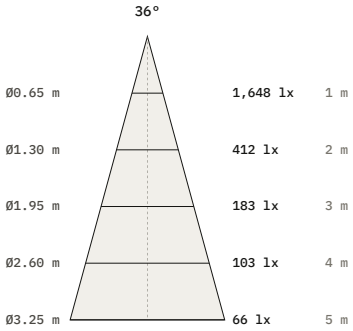

Luminous flux	720 lm
Efficacy	80 lm/W
Peak intensity	1,648 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	66 × 66 × 30 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.