Downlights

Bet DL1672

Recessed spotlight




Recessed spotlight. 15 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø83 mm
- LED source: Citizen

Power **15 W**	Voltage **max 24 V**	Luminous flux **1280 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **White**		

Dimensions

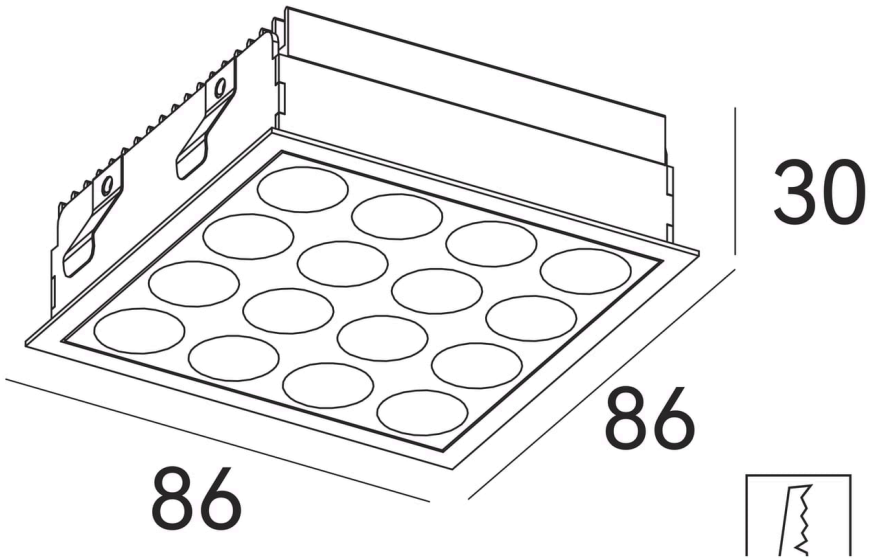


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1672	15 W	max 24 V	1280 lm	97 CRI	86 × 86 × 30 mm	Ø83 mm	24° 36°	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1672, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1672, 15 W, 24° beam

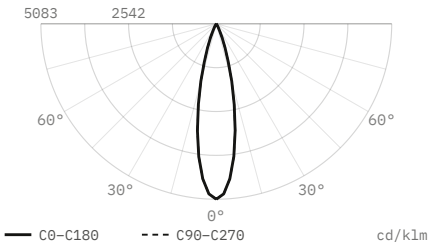


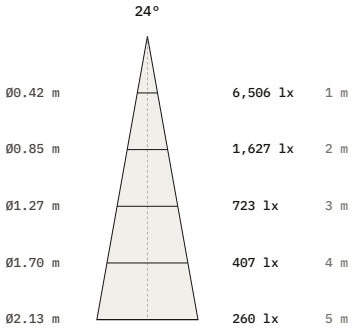

Luminous flux	1,280 lm
Efficacy	85 lm/W
Peak intensity	6,506 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	86 × 86 × 30 mm
Data	Calculated from catalogue data

DL1672, 15 W, 36° beam

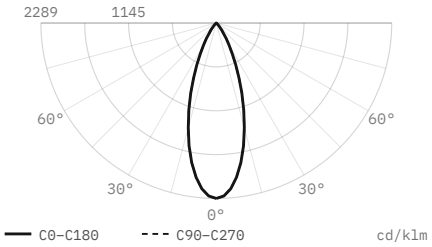

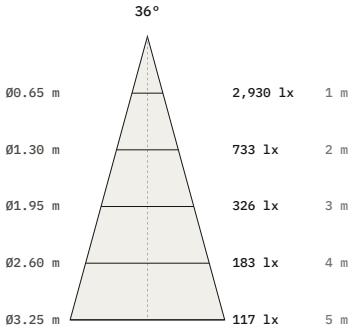

Luminous flux	1,280 lm
Efficacy	85 lm/W
Peak intensity	2,930 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	86 × 86 × 30 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.