Downlights

# Bet DL1720

Recessed spotlight




Recessed spotlight. 15 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø91 mm
- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**15 W** | Voltage<br>**max 24 V** | Luminous flux<br>**1280 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**24°, 36°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Recessed** |
| Finishes<br>**Black** | | |

## Dimensions

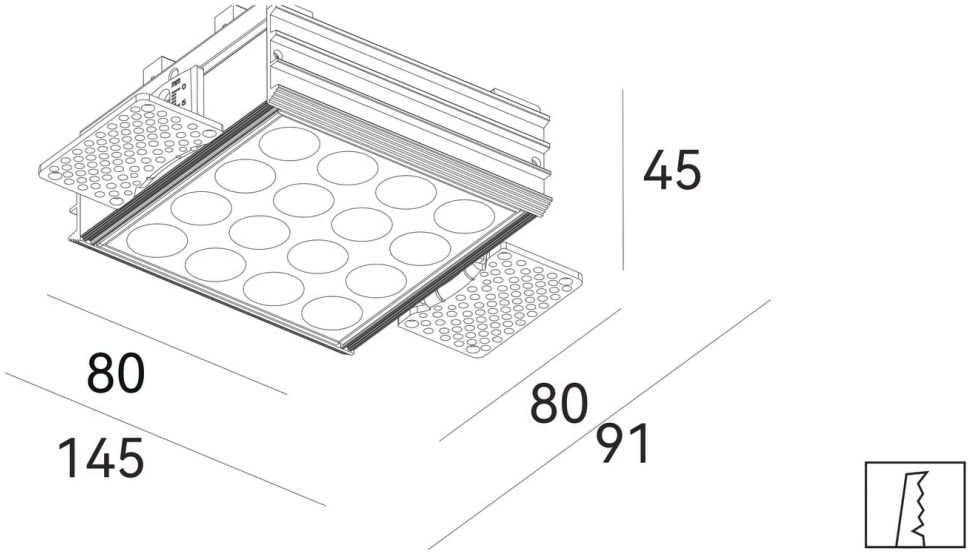



## Models


| Code | Power | Voltage | Flux | CRI | Size | Cut-out | Beam | Notes |
|---|---|---|---|---|---|---|---|---|
| **DL1720** | 15 W | max 24 V | 1280 lm | 97 CRI | 145 × 91 × 45 mm overall (module 80 × 80) | Ø91 mm | 24° 36° | 600 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1720, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## DL1720, 15 W, 24° beam

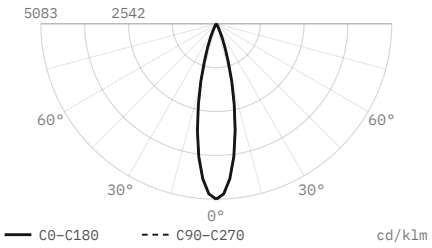


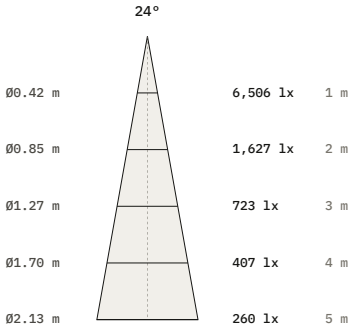
| | |
|---|---|
| Luminous flux | 1,280 lm |
| Efficacy | 85 lm/W |
| Peak intensity | 6,506 cd, 5,083 cd/klm |
| Beam angle (50%) | 24° |
| Field angle (10%) | 43.7° |
| Cut-off angle (2.5%) | 27.5° |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 % |
| Size | 145 × 91 × 45 mm |
| Data | Calculated from catalogue data |

## DL1720, 15 W, 36° beam

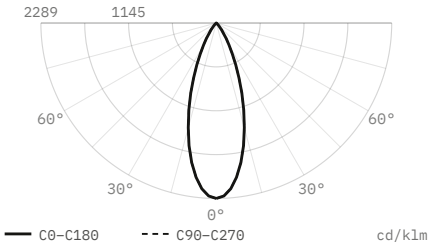


| | |
|---|---|
| Luminous flux | 1,280 lm |
| Efficacy | 85 lm/W |
| Peak intensity | 2,930 cd, 2,289 cd/klm |
| Beam angle (50%) | 36° |
| Field angle (10%) | 65.6° |
| Cut-off angle (2.5%) | 41.5° |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 % |
| Size | 145 × 91 × 45 mm |
| Data | Calculated from catalogue data |

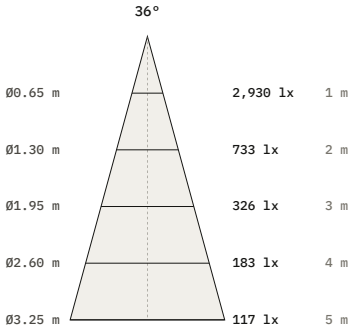DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.