Linear

Bet DL1910

Linear luminaire





Linear luminaire. 7 W. 24° or 38° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø91 mm
- LED source: Citizen

Power	Voltage	Luminous flux
7 W	max 20 V	560 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	24°, 38°
IP rating	**Certifications**	**Mounting**
IP20	CE	Recessed
Finishes		
Black		

Dimensions

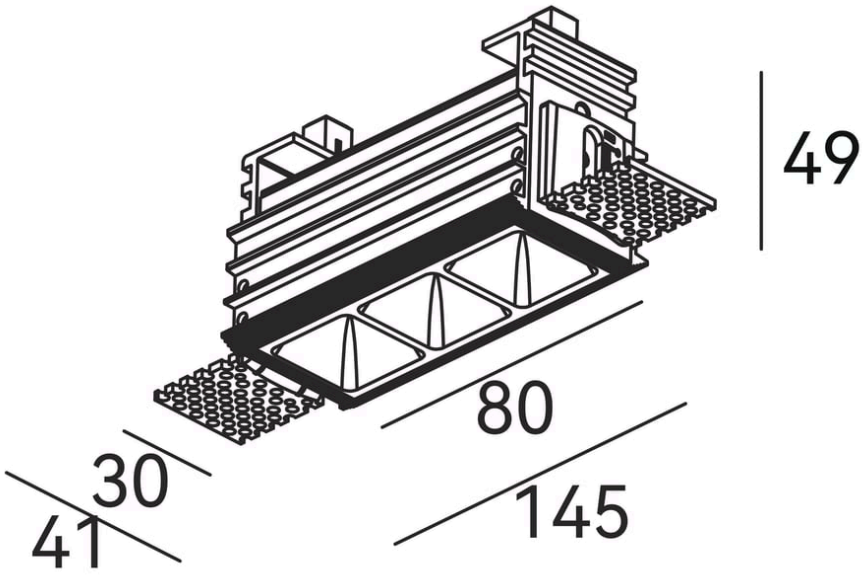




Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1910	7 W	max 20 V	560 lm	97 CRI	L145 x W41 x H49 mm	Ø91 mm	24° 38°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1910, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1910, 7 W, 24° beam

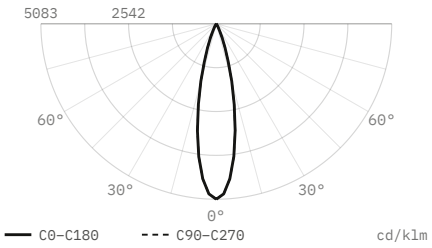


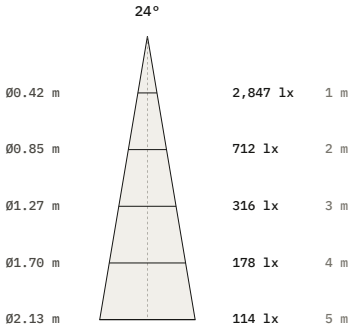

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	2,847 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	145 × 41 × 49 mm
Data	Calculated from catalogue data

DL1910, 7 W, 38° beam

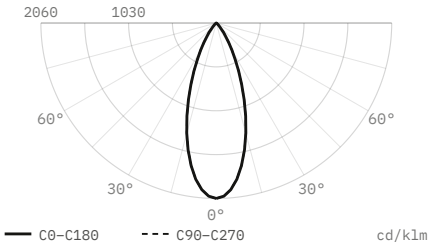

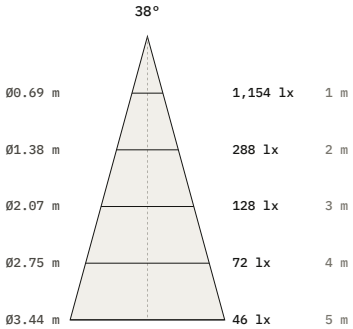

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	1,154 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	145 × 41 × 49 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.