Downlights

# Bet DL1932

Recessed spotlight




Recessed spotlight. 21 W. 24° or 36° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø210 mm
- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**21 W** | Voltage<br>**max 30 V** | Luminous flux<br>**1680 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | Beam angles<br>**24°, 36°** |
| IP rating<br>**IP20** | Certifications<br>**CE** | Mounting<br>**Recessed** |
| Finishes<br>**Black** | | |

## Dimensions

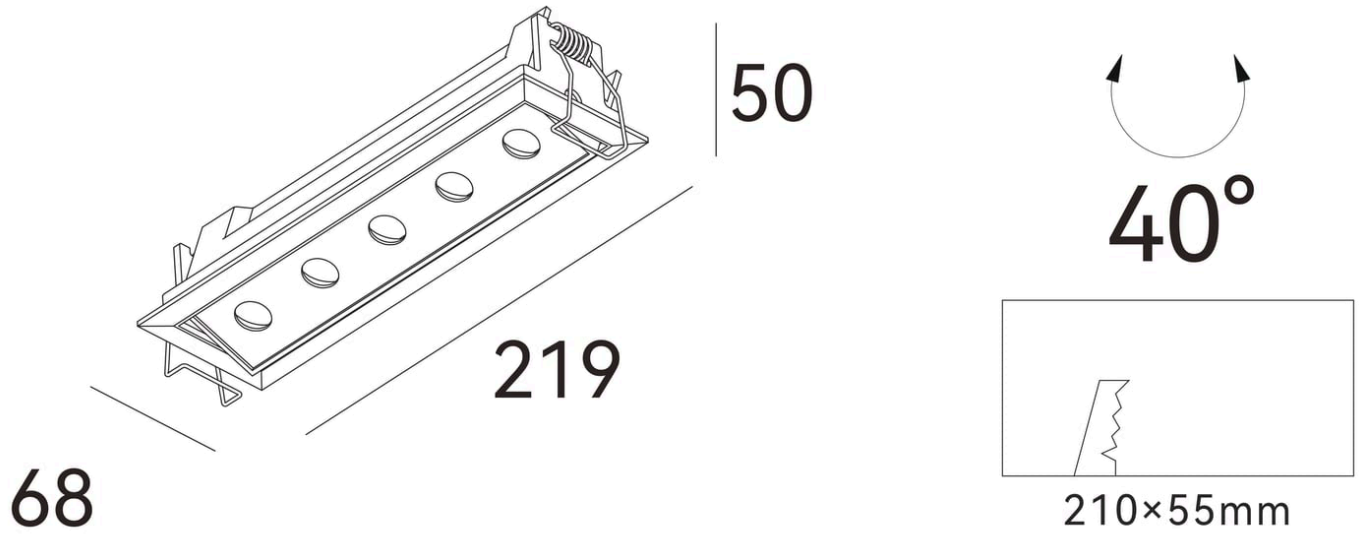



## Models


| Code | Power | Voltage | Flux | CRI | Size | Cut-out | Beam | Notes |
|---|---|---|---|---|---|---|---|---|
| **DL1932** | 21 W | max 30 V | 1680 lm | 97 CRI | L219 x W68 x H50 mm | Ø210 mm | 24° 36° | 700 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1932, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## DL1932, 21 W, 24° beam

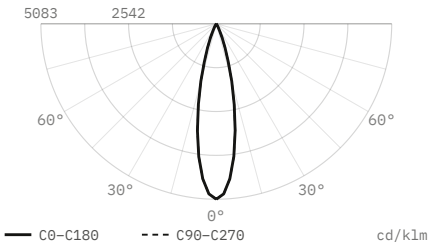


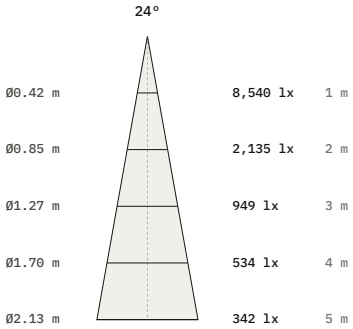
| | |
|---|---|
| Luminous flux | 1,680 lm |
| Efficacy | 80 lm/W |
| Peak intensity | 8,540 cd, 5,083 cd/klm |
| Beam angle (50%) | 24° |
| Field angle (10%) | 43.7° |
| Cut-off angle (2.5%) | 27.5° |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 % |
| Size | 219 × 68 × 50 mm |
| Data | Calculated from catalogue data |

## DL1932, 21 W, 36° beam

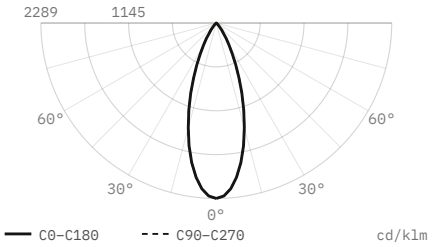


| | |
|---|---|
| Luminous flux | 1,680 lm |
| Efficacy | 80 lm/W |
| Peak intensity | 3,846 cd, 2,289 cd/klm |
| Beam angle (50%) | 36° |
| Field angle (10%) | 65.6° |
| Cut-off angle (2.5%) | 41.5° |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 % |
| Size | 219 × 68 × 50 mm |
| Data | Calculated from catalogue data |

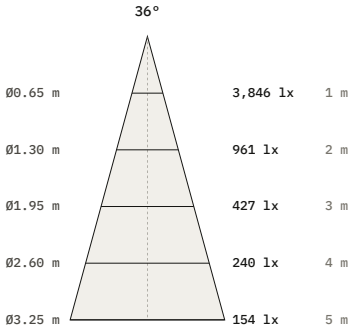DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.