Linear

Bet DL1934

Linear luminaire




Linear luminaire. 7 W. 24° or 38° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø91 mm
- LED source: Citizen

Power **7 W**	Voltage **max 20 V**	Luminous flux **560 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 38°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

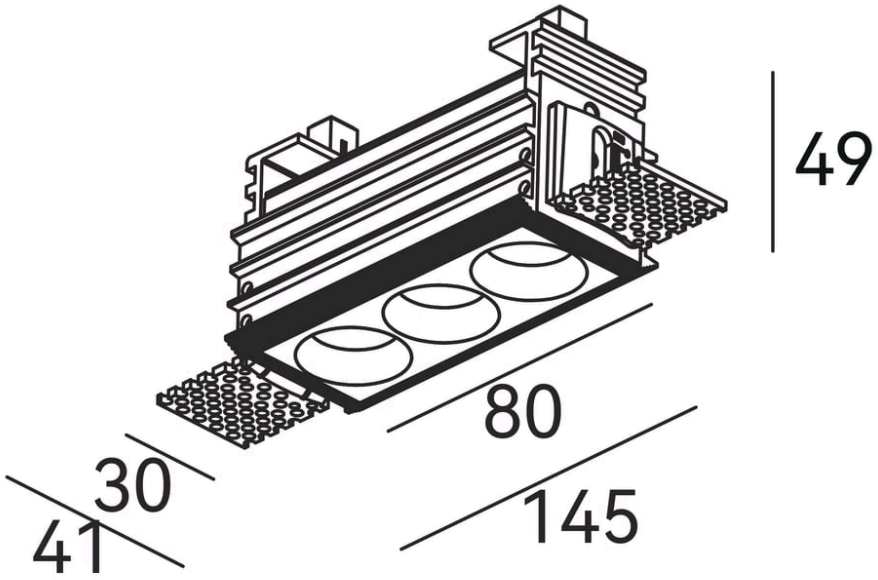




Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1934	7 W	max 20 V	560 lm	97 CRI	L145 x W41 x H49 mm	Ø91 mm	24° 38°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1934, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1934, 7 W, 24° beam

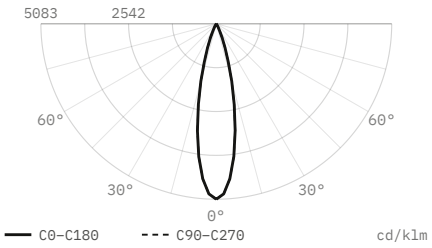


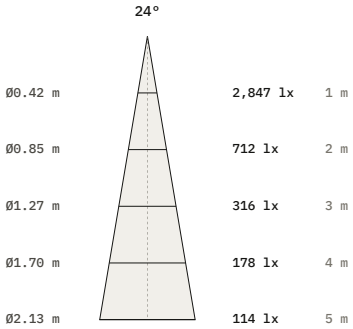

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	2,847 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	145 × 41 × 49 mm
Data	Calculated from catalogue data

DL1934, 7 W, 38° beam

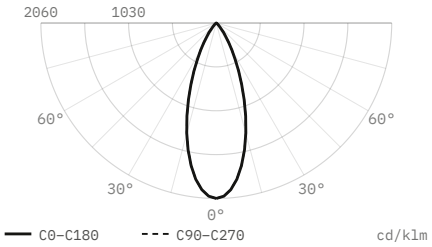

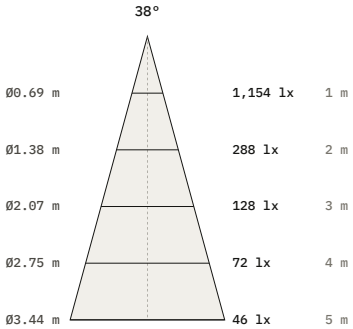

Luminous flux	560 lm
Efficacy	80 lm/W
Peak intensity	1,154 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	145 × 41 × 49 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.