Outdoor

Bollard SL0081

Outdoor luminaire




Outdoor luminaire. 7 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
7 W	24 V DC	560 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP67
Certifications	**Mounting**	**Finishes**
CE	Floor, Wall	Black

Dimensions

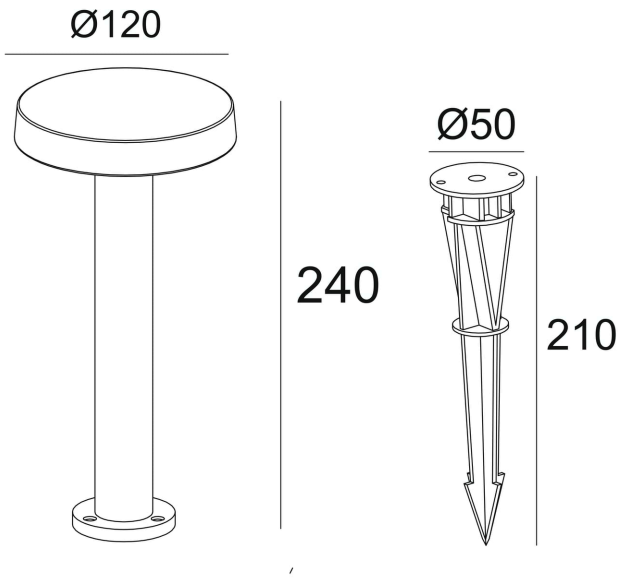


Models


Code	Power	Voltage	Flux	CRI	Size
SL0081	7 W	24 V DC	560 lm	97 CRI	Ø120 x H240 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0081, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0081, 7 W, wide distribution

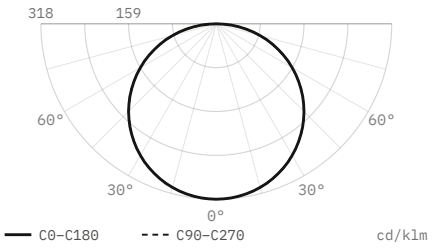

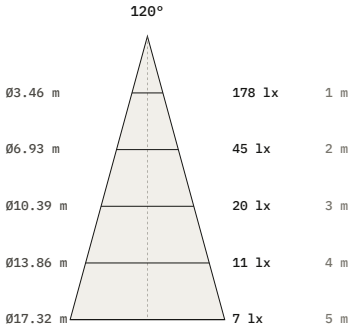

Luminous flux	**560 lm**
Efficacy	**80 lm/W**
Peak intensity	**178 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø120 × 240 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.