Outdoor

Bollard SL0093

Outdoor luminaire




Outdoor luminaire. 7 W. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
7 W	**24 V DC**	**560 lm**
Colour temperature	CRI	IP rating
2700 K, 3000 K, 4000 K	**97 CRI**	**IP65**
Certifications	Mounting	Finishes
CE	**Floor, Wall**	**Black**

Dimensions

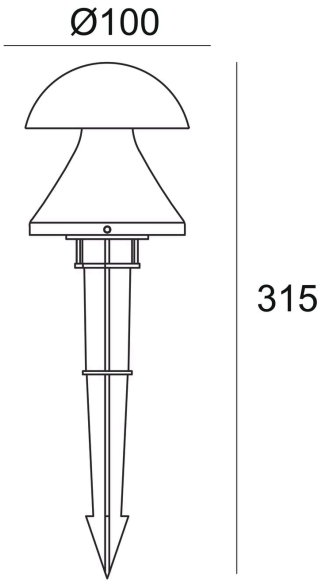


Models


Code	Power	Voltage	Flux	CRI	Size
SL0093	7 W	24 V DC	560 lm	97 CRI	Ø100 × 315 mm (overall incl. ground spike)

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0093, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0093, 7 W, wide distribution

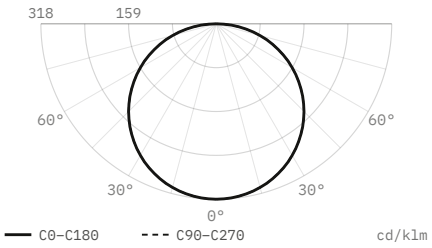

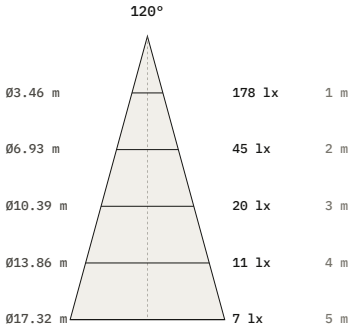

Luminous flux	**560 lm**
Efficacy	**80 lm/W**
Peak intensity	**178 cd, 318 cd/klm**
Beam angle (50%)	**120°**
Field angle (10%)	**168.5°**
Cut-off angle (2.5%)	**88.5°**
Flux 0–30° / 30–60° / 60–90°	**25 / 50 / 25 %**
Size	**Ø100 × 315 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.