Outdoor

Bollard SL0136

Outdoor luminaire



Outdoor luminaire. 10 W. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
10 W	**24 V DC**	**800 lm**
Colour temperature	CRI	IP rating
2700 K, 3000 K, 4000 K	**97 CRI**	**IP65**
Certifications	Mounting	Finishes
CE	**Floor, Wall**	**Black**

Dimensions

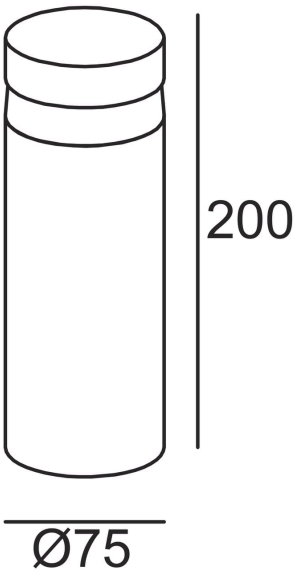

Models

Code	Version	Power	Voltage	Flux	CRI	Size
SL0136	H 200 mm	10 W	24 V DC	800 lm	97 CRI	Ø75 x H200 mm
SL0137	H 400 mm	10 W	24 V DC	800 lm	97 CRI	Ø75 x H400 mm
SL0138	H 600 mm	10 W	24 V DC	800 lm	97 CRI	Ø75 x H600 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0136, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0136, 10 W, wide distribution

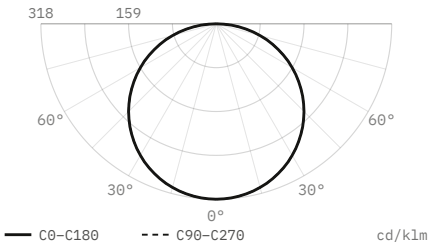

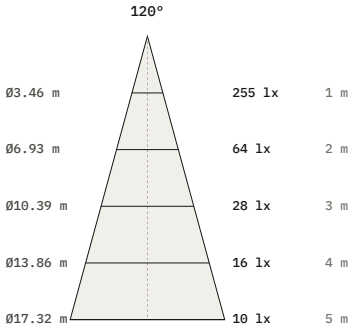

Luminous flux	800 lm
Efficacy	80 lm/W
Peak intensity	255 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø75 × 200 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.