Outdoor

Bollard SL0146

Outdoor luminaire



Outdoor luminaire. 12 W. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power	Voltage	Luminous flux
12 W	24 V DC	1080 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP65
Certifications	**Mounting**	**Finishes**
CE	Floor, Wall	Black

Dimensions

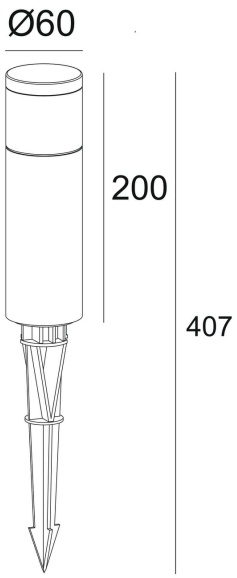

Models

Code	Version	Power	Voltage	Flux	CRI	Size
SL0146	H 407 mm	12 W	24 V DC	1080 lm	97 CRI	Ø60 x H407 mm (body 200 mm above the ground spike, 407 mm overall)
SL0129	H 200 mm	12 W	24 V DC	1080 lm	97 CRI	Ø60 x H200 mm
SL0130	H 400 mm	12 W	24 V DC	1080 lm	97 CRI	Ø60 x H400 mm
SL0131	H 600 mm	12 W	24 V DC	1080 lm	97 CRI	Ø60 x H600 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0146, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0146, 12 W, wide distribution

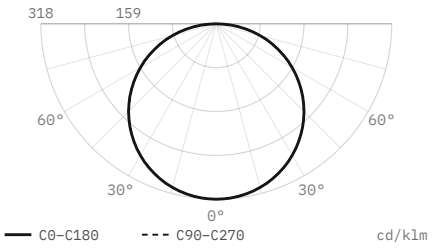

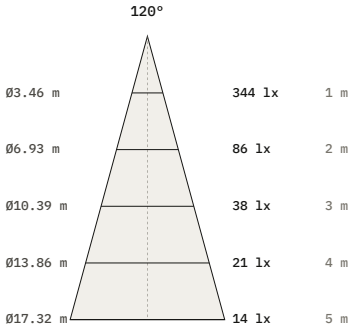

Luminous flux	1,080 lm
Efficacy	90 lm/W
Peak intensity	344 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø60 × 407 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.