Outdoor

# Bollard SL0177

Outdoor luminaire



Outdoor luminaire. 3 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- LED source: Citizen

| | | |
|---|---|---|
| Power<br>**3 W** | Voltage<br>**24 V DC** | Luminous flux<br>**270 lm** |
| Colour temperature<br>**2700 K, 3000 K, 4000 K** | CRI<br>**97 CRI** | IP rating<br>**IP67** |
| Certifications<br>**CE** | Mounting<br>**Floor, Wall** | Finishes<br>**Black** |

## Dimensions

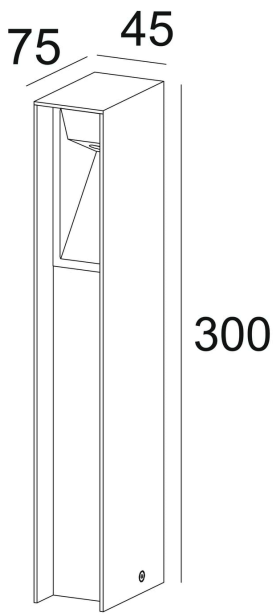


## Models

| Code | Power | Voltage | Flux | CRI | Size |
|---|---|---|---|---|---|
| **SL0177** | 3 W | 24 V DC | 270 lm | 97 CRI | 75 × 45 x H300 mm |
| **SL0178** | 3 W | 24 V DC | 270 lm | 97 CRI | 75 × 45 x H600 mm |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0177, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## SL0177, 3 W, wide distribution

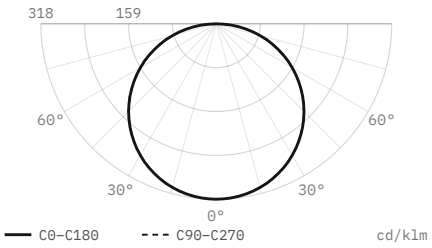


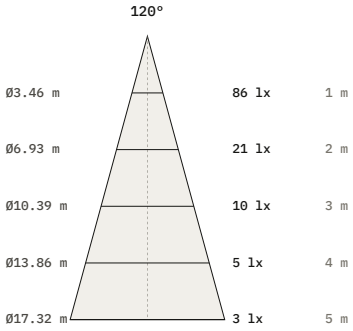


| | |
|---|---|
| Luminous flux | 270 lm |
| Efficacy | 90 lm/W |
| Peak intensity | 86 cd, 318 cd/klm |
| Beam angle (50%) | 120° |
| Field angle (10%) | 168.5° |
| Cut-off angle (2.5%) | 88.5° |
| Flux 0–30° / 30–60° / 60–90° | 25 / 50 / 25 % |
| Size | 75 × 45 × 300 mm |
| Data | Calculated from catalogue data |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.