Outdoor

# Deck DL0192

Outdoor luminaire




Outdoor luminaire.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

| Voltage | Luminous flux | Colour temperature |
|---|---|---|
| max 3 V, 24 V DC | 60 / 130 lm | 2700 K, 3000 K, 4000 K |
| **CRI** | **Beam angles** | **IP rating** |
| 97 CRI | 24°, 36° | IP67 |
| **Certifications** | **Mounting** | **Finishes** |
| CE | Floor, Recessed, Wall | Black |

## Dimensions

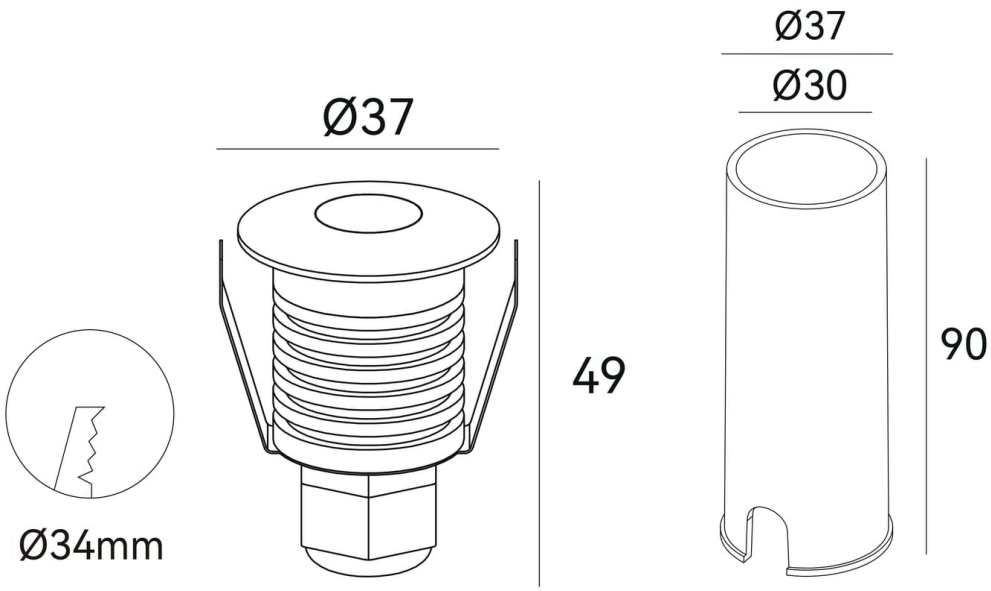



## Models


| Code | Voltage | Flux | CRI | Size | Cut-out | Beam | Notes |
|---|---|---|---|---|---|---|---|
| **DL0192** | max 3 V, 24 V DC | 60 / 130 lm | 97 CRI | Ø37 × 49 mm | Ø34 mm | 24° 36° | 350 / 700 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0192, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


## DL0192, 24° beam

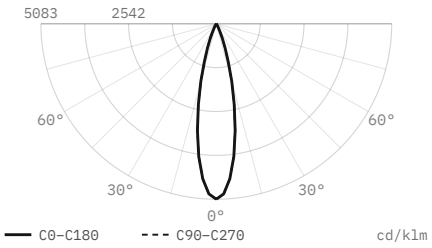


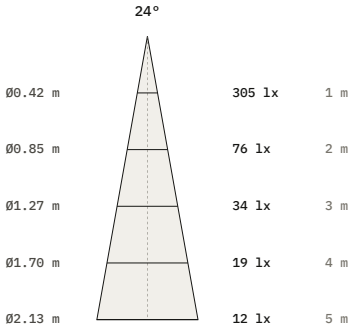
| | |
|---|---|
| Luminous flux | 60 lm |
| Peak intensity | 305 cd, 5,083 cd/klm |
| Beam angle (50%) | 24° |
| Field angle (10%) | 43.7° |
| Cut-off angle (2.5%) | 27.5° |
| Flux 0–30° / 30–60° / 60–90° | 98.7 / 1.3 / 0 % |
| Size | Ø37 × 49 mm |
| Data | Calculated from catalogue data |

## DL0192, 36° beam

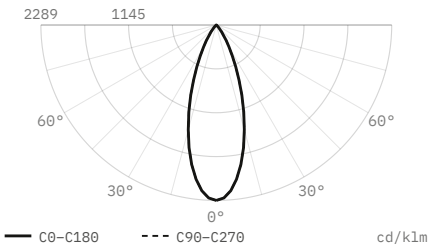


| | |
|---|---|
| Luminous flux | 60 lm |
| Peak intensity | 137 cd, 2,289 cd/klm |
| Beam angle (50%) | 36° |
| Field angle (10%) | 65.6° |
| Cut-off angle (2.5%) | 41.5° |
| Flux 0–30° / 30–60° / 60–90° | 86.1 / 13.9 / 0 % |
| Size | Ø37 × 49 mm |
| Data | Calculated from catalogue data |

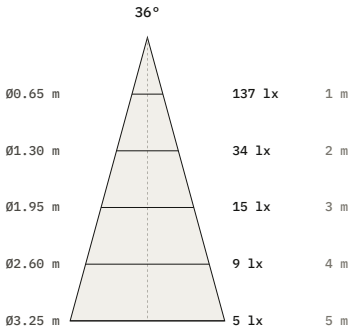DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.