
Outdoor

Deck DL0333

Outdoor luminaire

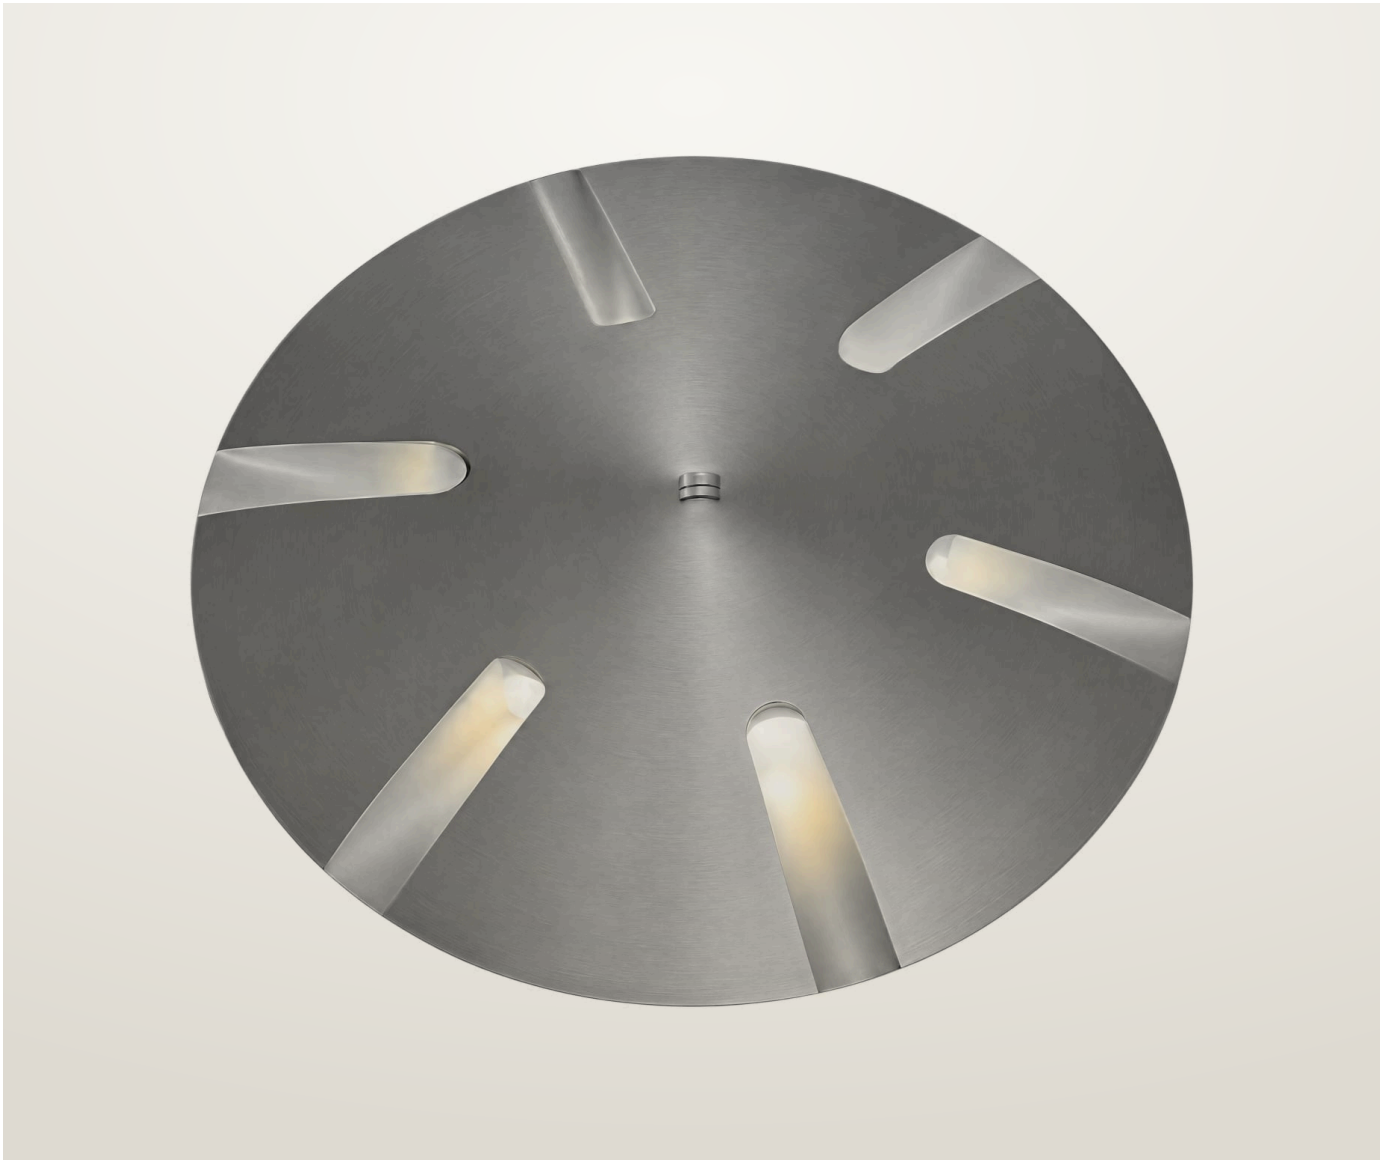


Outdoor luminaire.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

Voltage	Luminous flux	Colour temperature
max 3 V, 24 V DC	60 / 90 lm	2700 K, 3000 K, 4000 K
CRI	**Beam angles**	**IP rating**
97 CRI	15°, 24°, 36°, 60°	IP67
Certifications	**Mounting**	**Finishes**
CE	Floor, Recessed, Wall	Black

Dimensions

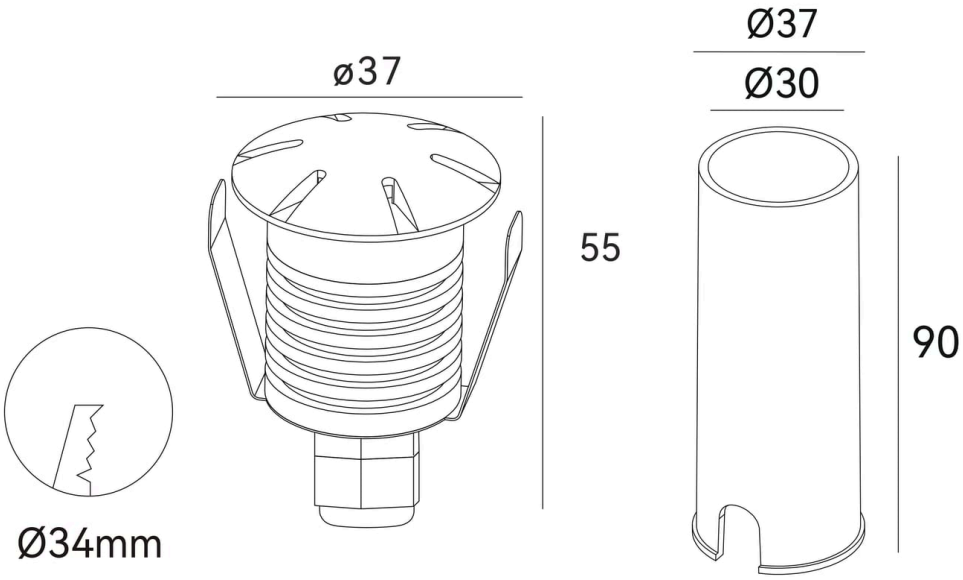


Models


Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0333	max 3 V, 24 V DC	60 / 90 lm	97 CRI	Ø37 × 55 mm	Ø34 mm	15° 24° 36° 60°	350 / 700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0333, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0333, 15° beam

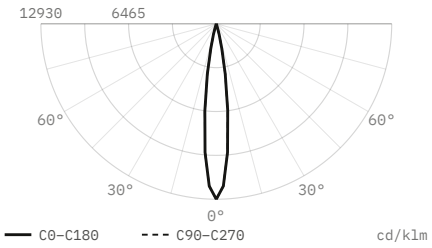


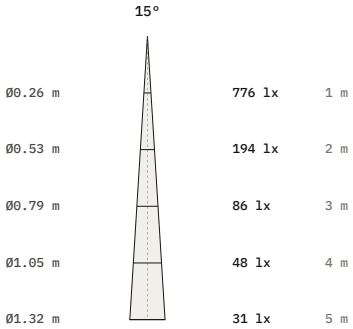

Luminous flux	60 lm
Peak intensity	776 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data


DL0333, 24° beam

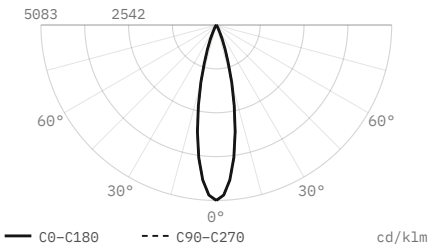


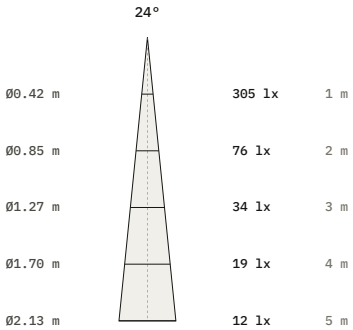

Luminous flux	60 lm
Peak intensity	305 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data


DL0333, 36° beam

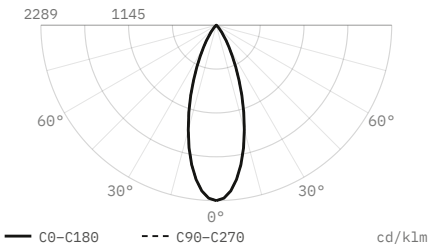


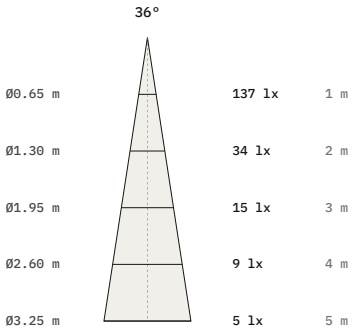

Luminous flux	60 lm
Peak intensity	137 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø37 × 55 mm
Data	Calculated from catalogue data

DL0333, 60° beam

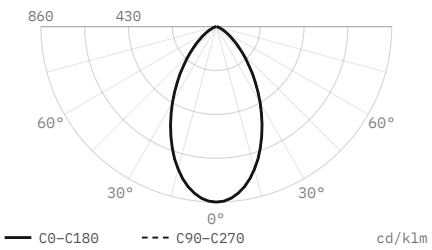

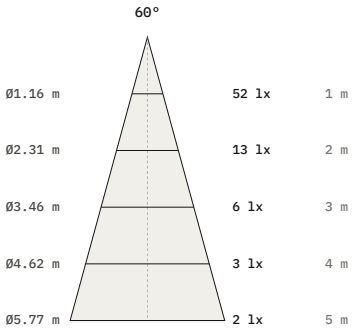

Luminous flux	**60 lm**
Peak intensity	**52 cd, 860 cd/klm**
Beam angle (50%)	**60°**
Field angle (10%)	**109.4°**
Cut-off angle (2.5%)	**69°**
Flux 0–30° / 30–60° / 60–90°	**52.4 / 42.6 / 5 %**
Size	**Ø37 × 55 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.