Outdoor

Deck DL1334

Outdoor luminaire




Outdoor luminaire. 1 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø21 mm
- LED source: Citizen

Power **1 W**	Voltage **max 3 V, 24 V DC**	Luminous flux **90 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP67**	Certifications **CE**	Mounting **Floor, Recessed, Wall**
Finishes **Black**		

Dimensions

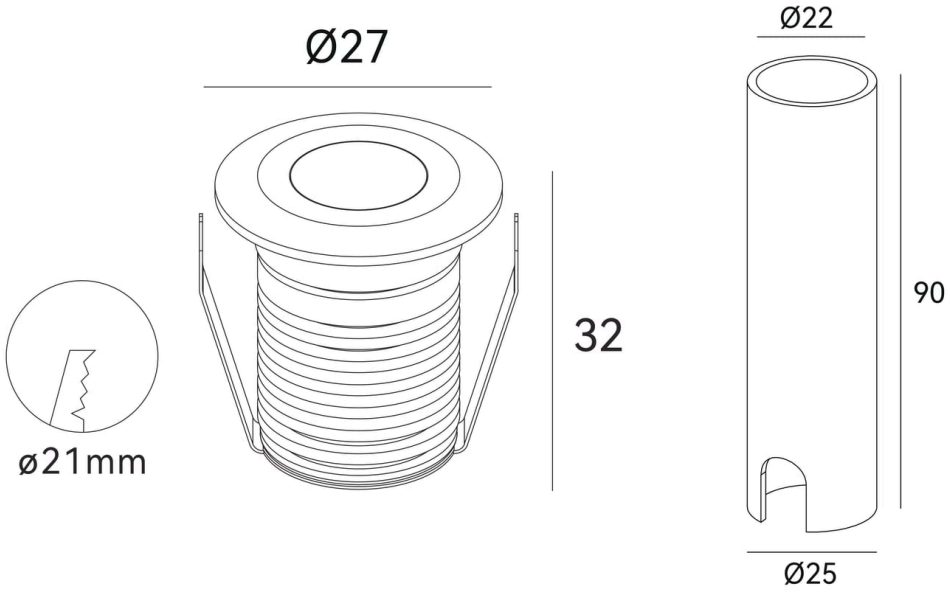


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1334	1 W	max 3 V, 24 V DC	90 lm	97 CRI	Ø27 × 32 mm	Ø21 mm	15° 24° 36° 60°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1334, from the same data as the IES and LDT files on the product page. Curves marked measured come from goniophotometer tests in the laboratory; the others are calculated from catalogue data, not measured.


DL1334, 1.6 W, 2700 K, 24° beam, measured

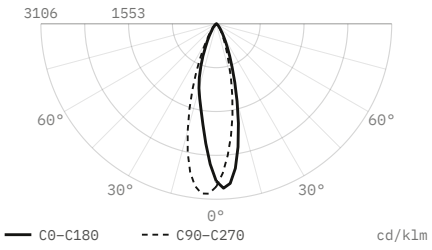


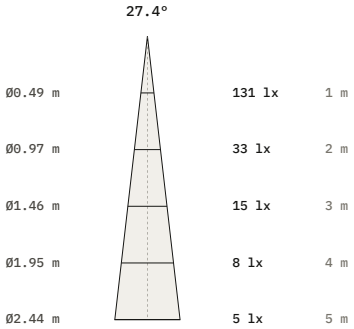

Luminous flux	47 lm
Efficacy	29 lm/W
Peak intensity	146 cd, 3,106 cd/klm
Beam angle (50%)	27.4°
Field angle (10%)	57.3°
Cut-off angle (2.5%)	42°
Flux 0–30° / 30–60° / 60–90°	84.2 / 15.3 / 0.5 %
Size	Ø27 × 32 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 8 January 2025


DL1334, 1.7 W, 3000 K, 24° beam, measured

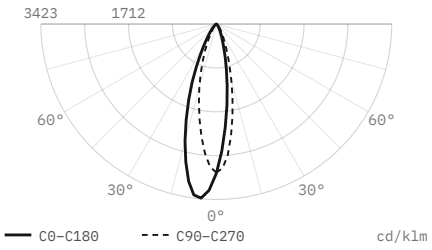


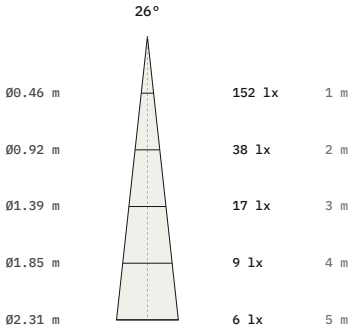

Luminous flux	52 lm
Efficacy	31 lm/W
Peak intensity	178 cd, 3,423 cd/klm
Beam angle (50%)	26°
Field angle (10%)	54.8°
Cut-off angle (2.5%)	46°
Flux 0–30° / 30–60° / 60–90°	84 / 15.5 / 0.5 %
Size	Ø27 × 32 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 8 January 2025


DL1334, 1 W, 15° beam

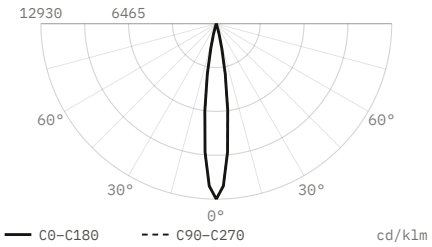


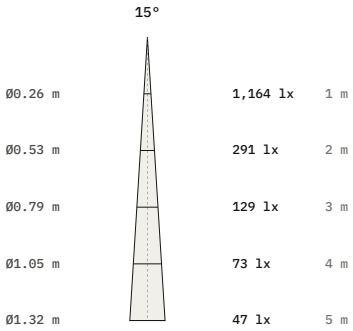

Luminous flux	90 lm
Efficacy	90 lm/W
Peak intensity	1,164 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø27 × 32 mm
Data	Calculated from catalogue data


DL1334, 1 W, 36° beam

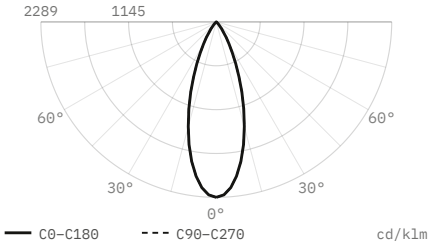


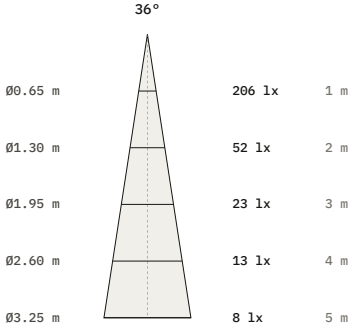

Luminous flux	90 lm
Efficacy	90 lm/W
Peak intensity	206 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø27 × 32 mm
Data	Calculated from catalogue data

DL1334, 1 W, 60° beam

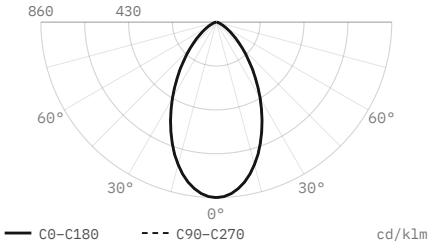

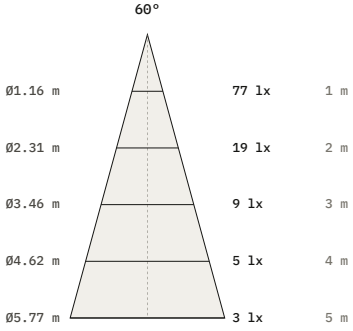

Luminous flux	90 lm
Efficacy	90 lm/W
Peak intensity	77 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø27 × 32 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.