
Outdoor

Deck DL1486

Outdoor luminaire

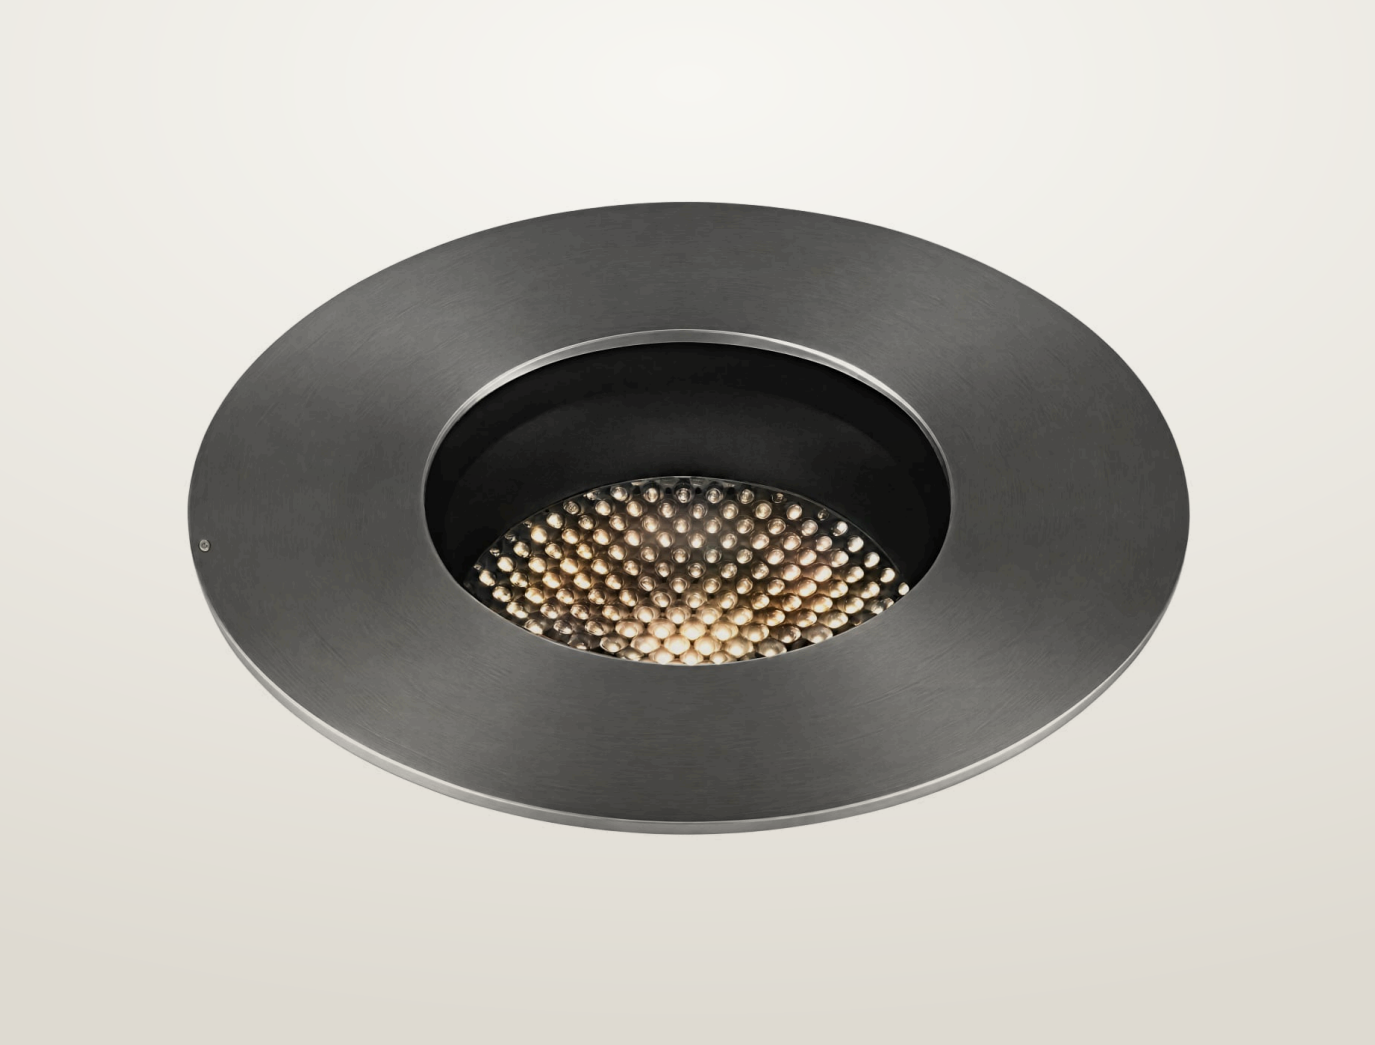

Outdoor luminaire. 3, 7, 9 or 13 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø49 / Ø60 / Ø68 mm
- LED source: Citizen

Power **3 W, 7 W, 9 W, 13 W**	Voltage **max 37 V, 24 V DC**	Luminous flux **270–1180 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP67**	Certifications **CE**	Mounting **Recessed, Wall**
Finishes **Black**		


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1486	13 W	max 37 V	1180 lm	97 CRI	Ø92 x H86 mm	Ø68 mm	15° 24° 36° 60°	350 mA
DL1488	3 W	24 V DC	270 lm	97 CRI		Ø49 mm	15° 24° 36° 60°	
DL1489	7 W	24 V DC	560 lm	97 CRI		Ø60 mm	15° 24° 36° 60°	
DL1490	9 W	24 V DC	750 lm	97 CRI		Ø68 mm	15° 24° 36° 60°	

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1486, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1486, 13 W, 15° beam

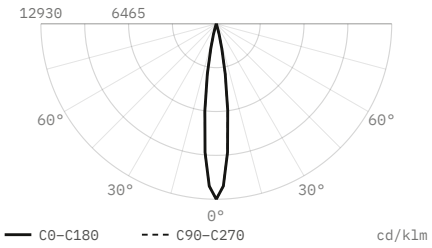


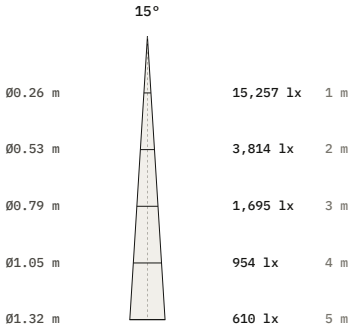

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	15,257 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø92 × 86 mm
Data	Calculated from catalogue data


DL1486, 13 W, 24° beam

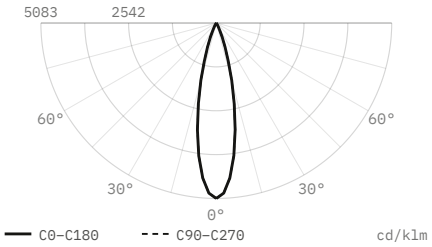


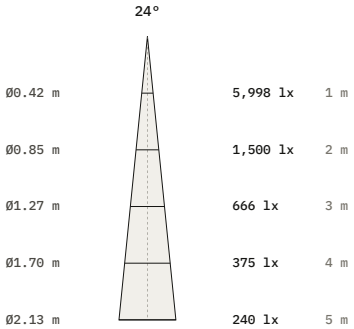

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	5,998 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø92 × 86 mm
Data	Calculated from catalogue data


DL1486, 13 W, 36° beam

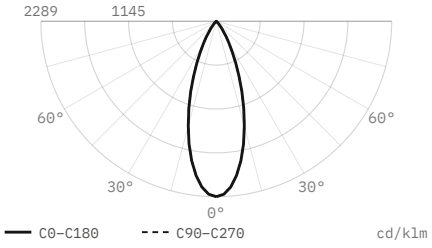


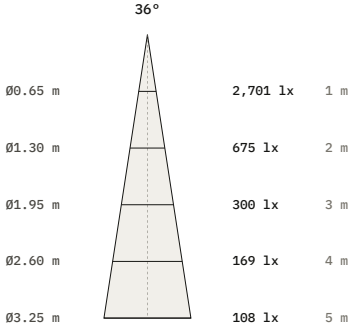

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	2,701 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø92 × 86 mm
Data	Calculated from catalogue data

DL1486, 13 W, 60° beam

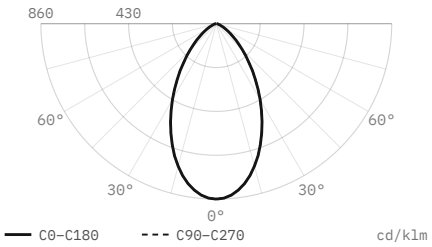

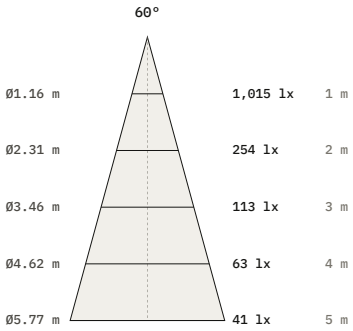

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	1,015 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø92 × 86 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.