Outdoor

Deck DL1677

Outdoor luminaire




Outdoor luminaire. 5 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP65. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power **5 W**	Voltage **max 19 V**	Luminous flux **400 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP65**	Certifications **CE**	Mounting **Recessed, Wall**
Finishes **Black**		

Dimensions

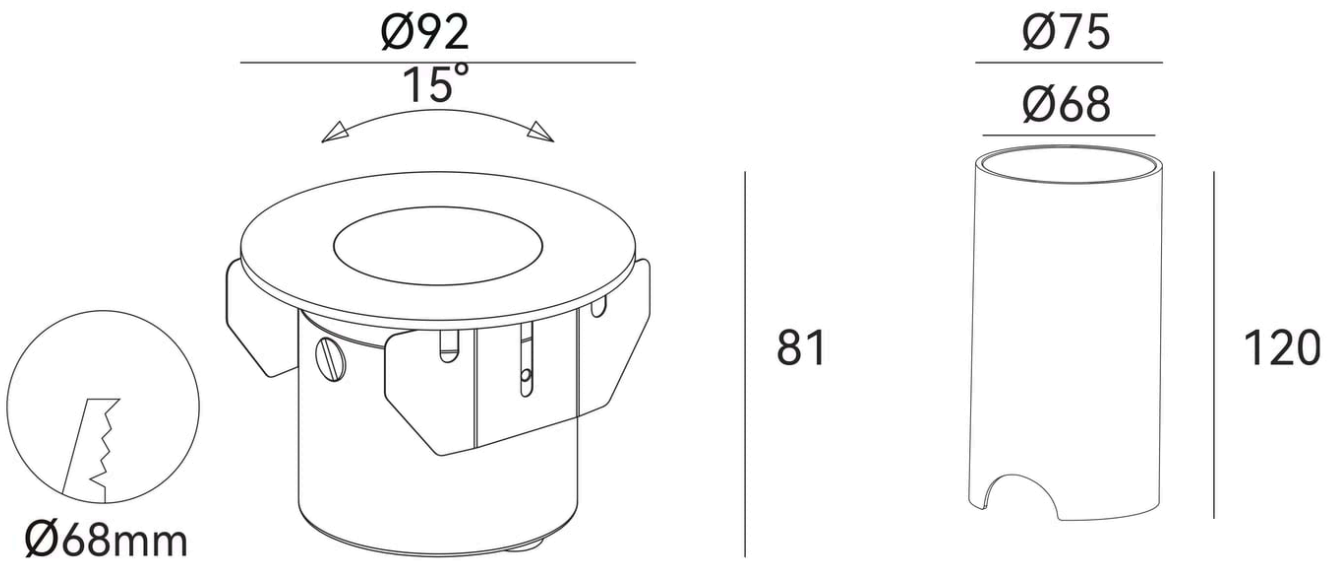


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1677	5 W	max 19 V	400 lm	97 CRI	Ø92 x H81 (flange Ø92, body height 81 mm); installation sleeve Ø75/Ø68 x H120 mm	Ø68 mm	15° 24° 36° 60°	250 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1677, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL1677, 5 W, 15° beam

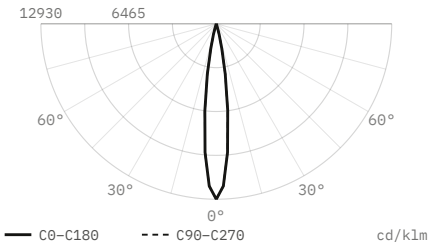


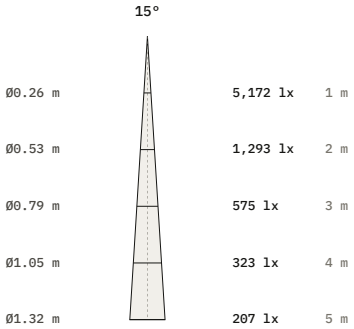

Luminous flux	400 lm
Efficacy	80 lm/W
Peak intensity	5,172 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø92 × 81 mm
Data	Calculated from catalogue data


DL1677, 5 W, 24° beam

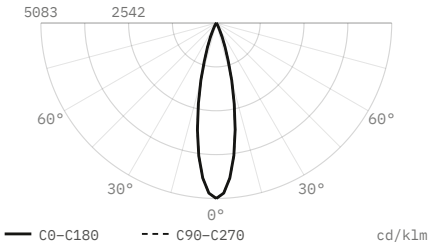


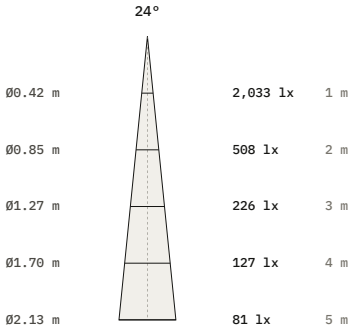

Luminous flux	400 lm
Efficacy	80 lm/W
Peak intensity	2,033 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø92 × 81 mm
Data	Calculated from catalogue data


DL1677, 5 W, 36° beam

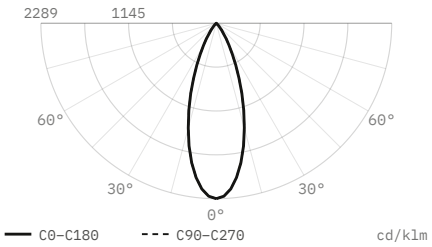


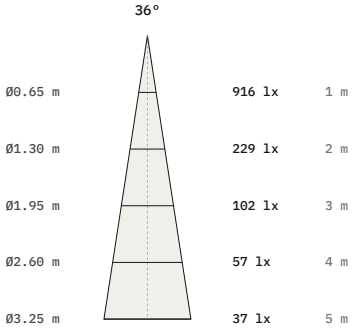

Luminous flux	400 lm
Efficacy	80 lm/W
Peak intensity	916 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø92 × 81 mm
Data	Calculated from catalogue data

DL1677, 5 W, 60° beam

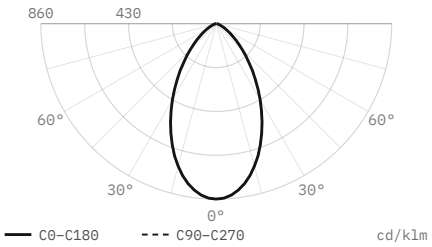

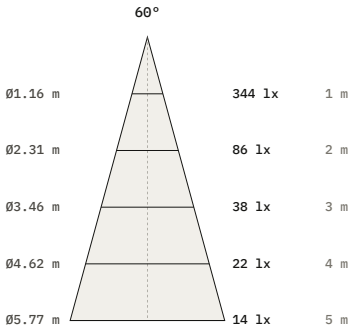

Luminous flux	400 lm
Efficacy	80 lm/W
Peak intensity	344 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	Ø92 × 81 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.