Outdoor

Deck DL1711

Outdoor luminaire



Outdoor luminaire. 13 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø90 mm
- LED source: Citizen

Power **13 W**	Voltage **max 36 V**	Luminous flux **951 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 60°**
IP rating **IP67**	Certifications **CE**	Mounting **Recessed, Wall**
Finishes **Black**		


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1711	Wall washer	13 W	max 36 V	951 lm	97 CRI	Ø105 x H95 (flange Ø105, body height 95 mm); installation sleeve Ø89/Ø82 x H120 mm	Ø90 mm	15° 24° 36° 60°	350 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1711, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1711, 13 W, wall washer

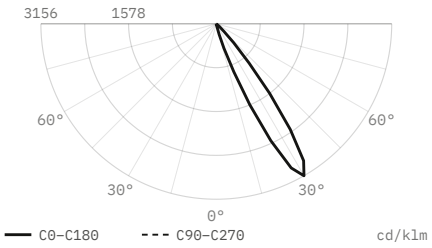


Luminous flux	951 lm
Efficacy	73 lm/W
Peak intensity	3,001 cd, 3,156 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	77°
Flux 0–30° / 30–60° / 60–90°	22.1 / 74.6 / 3.3 %
Size	Ø105 × 95 mm
Data	Calculated from catalogue data

DL1711, 13 W, wall washer

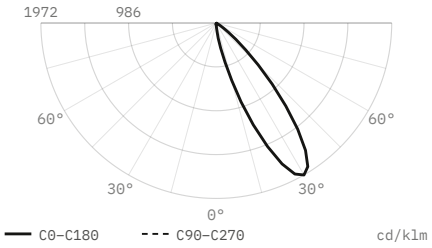


Luminous flux	951 lm
Efficacy	73 lm/W
Peak intensity	1,876 cd, 1,972 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	78°
Flux 0–30° / 30–60° / 60–90°	25.9 / 69.9 / 4.2 %
Size	Ø105 × 95 mm
Data	Calculated from catalogue data

DL1711, 13 W, wall washer

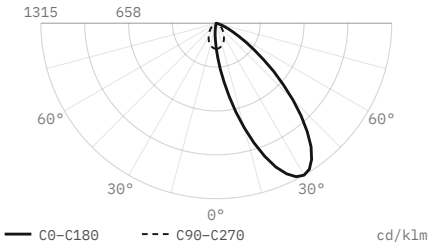

Luminous flux	951 lm
Efficacy	73 lm/W
Peak intensity	1,250 cd, 1,315 cd/klm
Beam angle (50%)	asymmetric
Cut-off angle (2.5%)	79.5°
Flux 0–30° / 30–60° / 60–90°	28.9 / 63.4 / 7.7 %
Size	Ø105 × 95 mm
Data	Calculated from catalogue data

DL1711, 13 W, wall washer

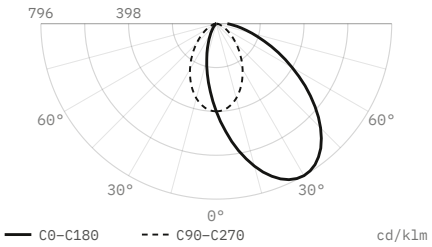

Luminous flux	**951 lm**
Efficacy	**73 lm/W**
Peak intensity	**757 cd, 796 cd/klm**
Beam angle (50%)	**asymmetric**
Cut-off angle (2.5%)	**90°**
Flux 0–30° / 30–60° / 60–90°	**31 / 52.2 / 16.8 %**
Size	**Ø105 × 95 mm**
Data	**Calculated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.