Downlights

Dot DL0802

Recessed spotlight



Recessed spotlight. 2 W. 16° beam. 2700, 3000, 4000 K. IP44. 97 CRI.


- Ceiling cut-out Ø18 mm
- LED source: Citizen

Power	Voltage	Luminous flux
2 W	max 3 V	180 lm
Colour temperature	**CRI**	**Beam angles**
2700 K, 3000 K, 4000 K	97 CRI	16°
IP rating	**Certifications**	**Mounting**
IP44	CE	Recessed

Finishes

Black

Dimensions

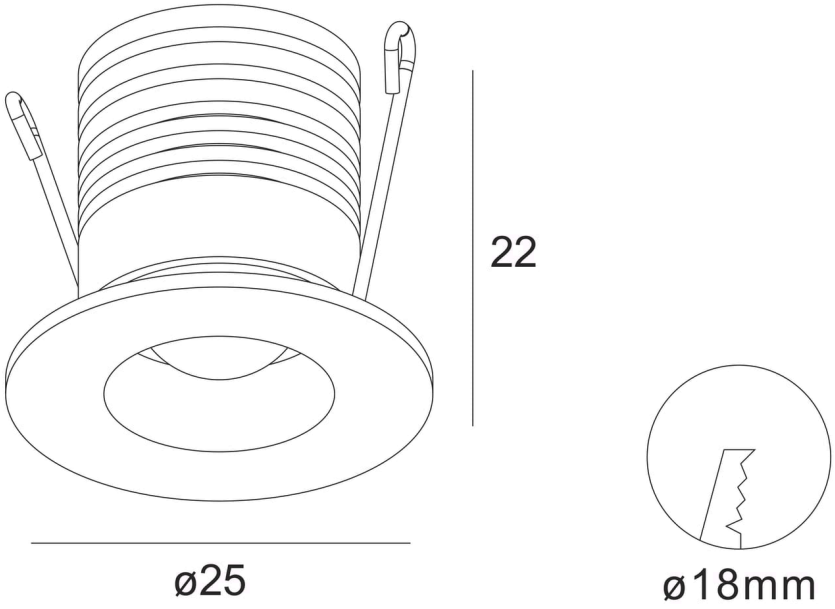


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0802	2 W	max 3 V	180 lm	97 CRI	Ø25 x H22 mm	Ø18 mm	16°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0802, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0802, 2 W, 16° beam

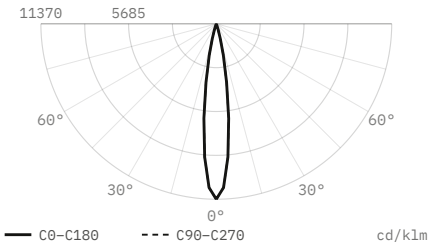

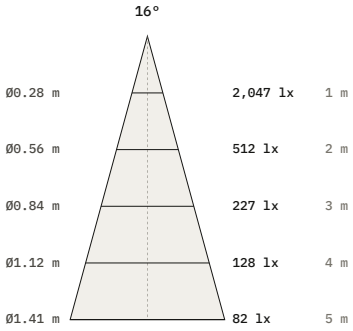

Luminous flux	180 lm
Efficacy	90 lm/W
Peak intensity	2,047 cd, 11,370 cd/klm
Beam angle (50%)	16°
Field angle (10%)	29.2°
Cut-off angle (2.5%)	18°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø25 × 22 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.