Downlights

Dot DL1947

Recessed spotlight




Recessed spotlight. 1 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø12 mm
- LED source: Citizen

Power	Voltage	Luminous flux
1 W	24 V DC	80 lm
Colour temperature	**CRI**	**IP rating**
2700 K, 3000 K, 4000 K	97 CRI	IP20
Certifications	**Mounting**	**Finishes**
CE	Recessed	Black

Dimensions

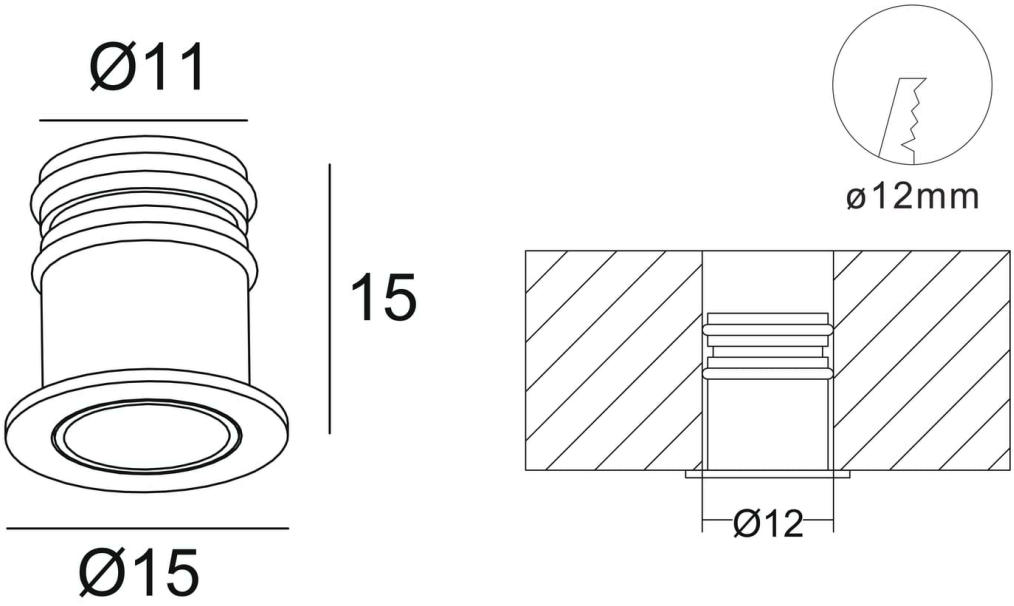


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out
DL1947	1 W	24 V DC	80 lm	97 CRI	Ø15 / Ø11 x H15 mm	Ø12 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1947, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1947, 1 W, wide distribution

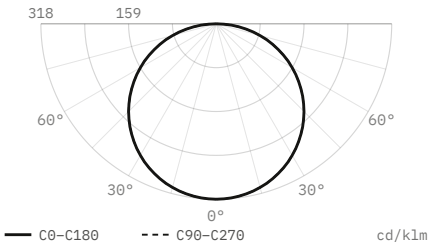

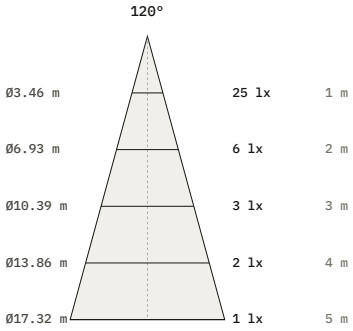

Luminous flux	80 lm
Efficacy	80 lm/W
Peak intensity	25 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø15 × 15 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.