Downlights

Eco DL0623

Recessed spotlight





Recessed spotlight. 13, 20 or 26 W. 100° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø125 / Ø160 / Ø200 mm
- LED source: Citizen

Power **13 W, 20 W, 26 W**	Voltage **max 37 V, max 28 V**	Luminous flux **1241 lm, 1830 lm, 2579 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **100°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Finishes **Black**		

Dimensions

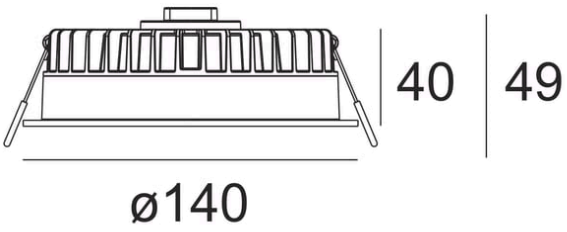




Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0623	13 W	max 37 V	1241 lm	97 CRI	Ø140 × 49 mm	Ø125 mm	100°	350 mA
DL0624	20 W	max 28 V	1830 lm	97 CRI	Ø182 × 57 mm	Ø160 mm	100°	700 mA
DL0625	26 W	max 37 V	2579 lm	97 CRI	Ø230 × 62 mm	Ø200 mm	100°	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0625, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0625, 26 W, 100° beam

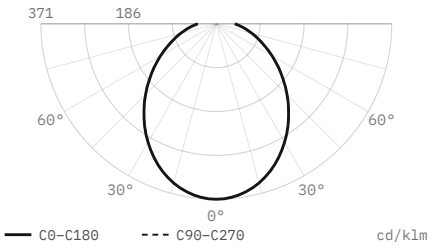

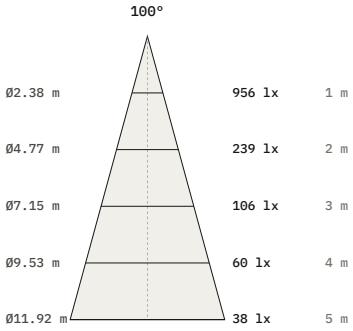

Luminous flux	2,579 lm
Efficacy	99 lm/W
Peak intensity	956 cd, 371 cd/klm
Beam angle (50%)	100°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	27.6 / 47.2 / 25.2 %
Size	Ø230 × 62 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.