Linear

Eric

Linear luminaire




Linear luminaire. 5, 10, 15 or 20 W. 24° or 36° beam. 2700, 3000, 4000, 5500 K. 97 CRI.

- Ceiling cut-out Ø64 / Ø122 / Ø180 / Ø238 mm
- LED source: Citizen

Power **5 W, 10 W, 15 W, 20 W**	Voltage **9 V, 17 V, 26 V, 34 V**	Colour temperature **2700 K, 3000 K, 4000 K, 5500 K**
CRI **97 CRI**	Beam angles **24°, 36°**	IP rating **IP20**
Mounting **Recessed**	Control **On/Off, Triac**	Finishes **Black**


Dimensions

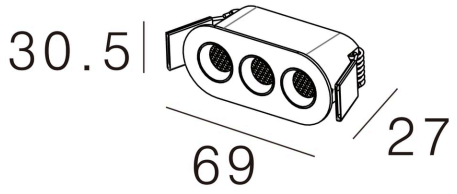



64*26


Rounded corners on both sides

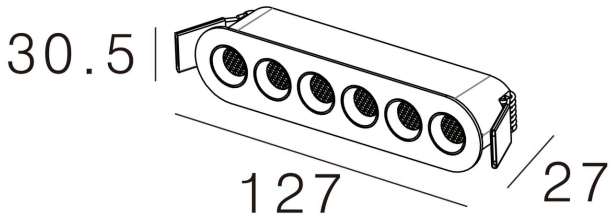



122*26


Rounded corners on both sides

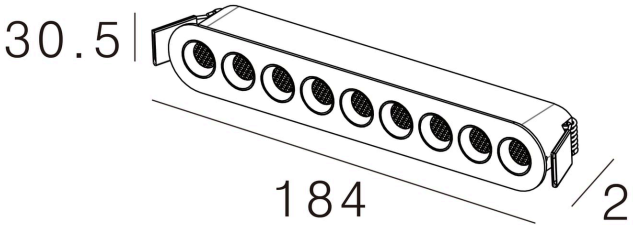



180*26

Rounded corners on both sides

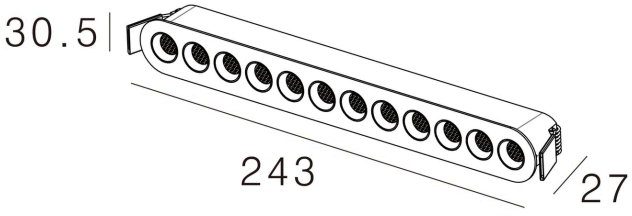



238*26

Rounded corners on both sides


Models


Code	Version	Power	Voltage	CRI	Size	Cut-out	Beam	Notes
RE-ERIC-0801-3	3 apertures	5 W	9 V	97 CRI	L69 x W27 x H30.5 mm	Ø64 mm	24° 36°	500 mA
RE-ERIC-1501-6	6 apertures	10 W	17 V	97 CRI	L127 x W27 x H30.5 mm	Ø122 mm	24° 36°	500 mA
RE-ERIC-2101-9	9 apertures	15 W	26 V	97 CRI	L184 x W27 x H30.5 mm	Ø180 mm	24° 36°	500 mA
RE-ERIC-2701-12	12 apertures	20 W	34 V	97 CRI	L243 x W27 x H30.5 mm	Ø238 mm	24° 36°	500 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-ERIC-2701-12, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


RE-ERIC-2701-12, 20 W, 24° beam

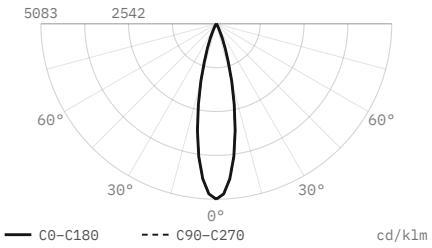


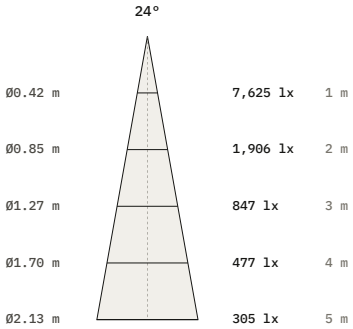

Luminous flux	1,500 lm
Efficacy	75 lm/W
Peak intensity	7,625 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	243 × 27 × 30.5 mm
Data	Estimated from catalogue data

RE-ERIC-2701-12, 20 W, 36° beam

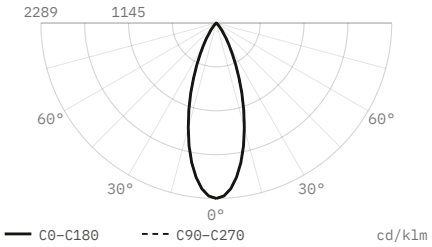

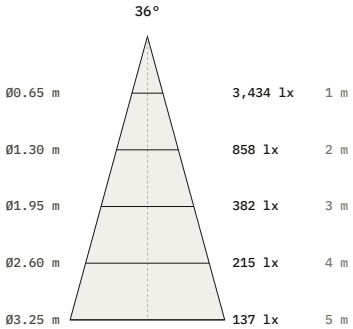

Luminous flux	1,500 lm
Efficacy	75 lm/W
Peak intensity	3,434 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	243 × 27 × 30.5 mm
Data	Estimated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.