Downlights

Grill DL0038

Recessed spotlight




Recessed spotlight. 13, 18, 26 or 33 W. Three beam angles, 15° to 36°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø116 mm
- LED source: Citizen

Power **13 W, 18 W, 26 W, 33 W**	Voltage **max 37 V**	Luminous flux **1300–3300 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°**
IP rating **IP20**	Certifications **CE**	Mounting **Recessed**
Control **DALI, 0-10V**	Finishes **Black**	

Dimensions

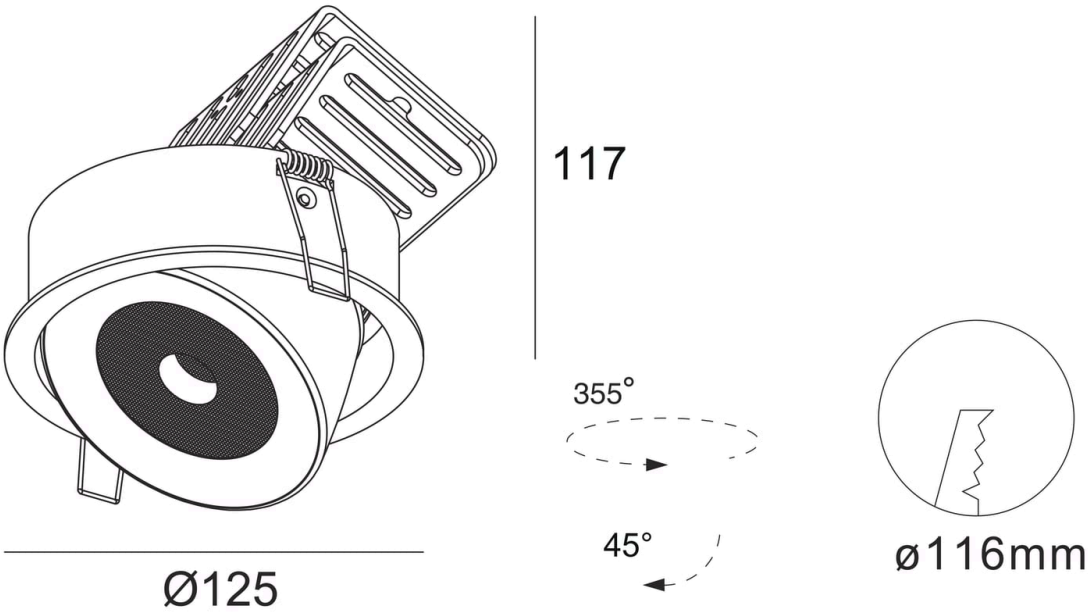


Models


Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0038	13 W	max 37 V	1300 lm	97 CRI	Ø125 × 117 mm	Ø116 mm	15° 24° 36°	350 mA
DL0039	18 W	max 37 V	1800 lm	97 CRI	Ø125 × 117 mm	Ø116 mm	15° 24° 36°	500 mA
DL0040	26 W	max 37 V	2600 lm	97 CRI	Ø125 × 129 mm	Ø116 mm	15° 24° 36°	700 mA
DL0041	33 W	max 37 V	3300 lm	97 CRI	Ø125 × 129 mm	Ø116 mm	15° 24° 36°	900 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0041, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


DL0041, 33 W, 15° beam

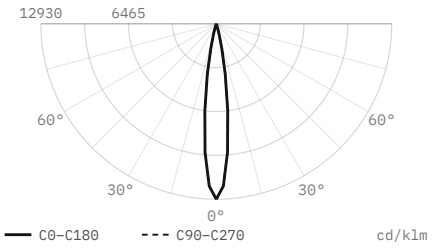


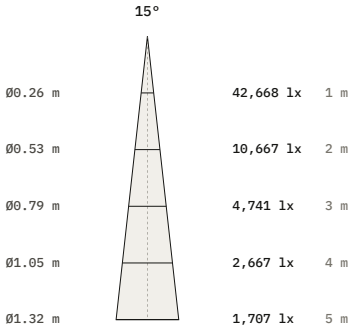

Luminous flux	3,300 lm
Efficacy	100 lm/W
Peak intensity	42,668 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø125 × 129 mm
Data	Calculated from catalogue data


DL0041, 33 W, 24° beam

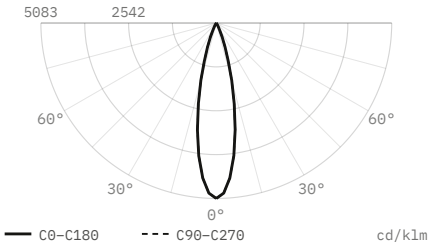


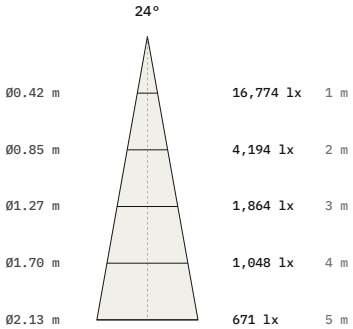

Luminous flux	3,300 lm
Efficacy	100 lm/W
Peak intensity	16,774 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø125 × 129 mm
Data	Calculated from catalogue data

DL0041, 33 W, 36° beam

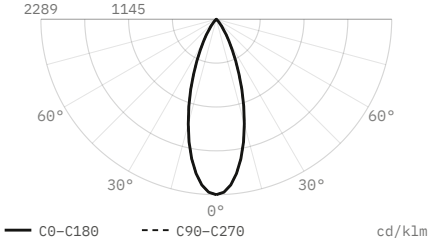

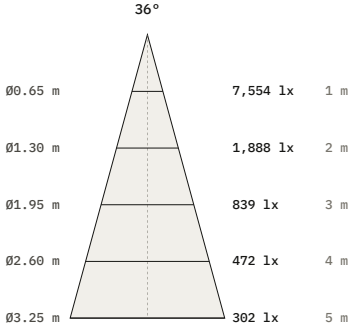

Luminous flux	3,300 lm
Efficacy	100 lm/W
Peak intensity	7,554 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø125 × 129 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.